

EPA Evaluation of the "Pass Master Vehicle Air
Conditioner Cut-Off Device"

This document contains several pages which may not reproduce well. Any questions concerning the legibility of these pages should be directed to: Merrill W. Korth, Environmental Protection Agency, Office of Mobile Source Air Pollution Control, Emission Control Technology Division, 2565 Plymouth Road, Ann Arbor, MI 48105, (313) 668-4299 or FTS 374-8299

By

Thomas J. Penninga

August 1980

Test and Evaluation Branch
Emission Control Technology Division
Office of Mobile Source Air Pollution Control
U.S. Environmental Protection Agency

Billing Code 6560-01

ENVIRONMENTAL PROTECTION AGENCY

[40 CFR Part 610]

[FRL _____]

FUEL ECONOMY RETROFIT DEVICES

Announcement of Fuel Economy Retrofit Device Evaluation
for the "Pass Master Vehicle Air Conditioning Compressor Cut-Off Device"

AGENCY: Environmental Protection Agency (EPA).

ACTION: Notice of Fuel Economy Retrofit Device Evaluation.

SUMMARY: This document announces the conclusions of the EPA evaluation of the "Pass Master Vehicle Air Conditioner Compressor Cut-Off Device" under the provisions of Section 511 of the Motor Vehicle Information and Cost Savings Act.

FOR FURTHER INFORMATION CONTACT: F. Peter Hutchins, Emission Control Technology Division, Office of Mobile Source Air Pollution Control, Environmental Protection Agency, 2565 Plymouth Road, Ann Arbor, Michigan 48105, 313-668-4340.

BACKGROUND INFORMATION: Section 511(b)(1) and Section 511(c) of the Motor Vehicle Information and Cost Savings Act (15 U.S.C. 2011(b)) requires that:

(b)(1) "Upon application of any manufacturer of a retrofit device (or prototype thereof), upon the request of the Federal Trade Commission pursuant to subsection (a), or upon his own motion, the EPA Administrator shall evaluate, in accordance with rules prescribed under subsection (d), any retrofit device to determine whether the retrofit device increases fuel economy and to determine whether the representations (if any) made with respect to such retrofit devices are accurate."

(c) "The EPA Administrator shall publish in the the Federal Register a summary of the results of all tests conducted under this section, together with the EPA Administrator's conclusions as to:

- (1) the effect of any retrofit device on fuel economy;
- (2) the effect of any such device on emissions of air pollutants;
and
- (3) any other information which the Administrator determines to be relevant in evaluating such device."

EPA published final regulations establishing procedures for conducting fuel economy retrofit device evaluations on March 23, 1979 [44 FR 17946].

ORIGIN OF REQUEST FOR EVALUATION: On September 20, 1979 the EPA received a request from Mr. Norman Halem for evaluation of a fuel saving device termed the "Pass Master Vehicle Air Conditioner Compressor Cut-Off Device". An evaluation has been made and the results are described completely in a report entitled: "EPA Evaluation of the Pass Master Vehicle Air Conditioner Compressor Cut-Off Device Under Section 511 of the Motor Vehicle Information and Cost Savings Act". Copies of this report are available upon request.

Summary:

The "Pass Master" device disengages the air conditioning compressor during hard vehicle acceleration modes. The reduced engine loading will result in some fuel savings. The effectiveness of the device will depend on five main factors:

- 1) The amount that the vehicle air conditioner is used. The device only operates when the vehicle air conditioning is turned on.
- 2) The driving habits of the vehicle operation; i.e., drivers who repeatedly use heavy accelerations and thereby activate the device will realize a greater benefit than drivers who use more moderate accelerations.
- 3) The suitability of the device calibration for the particular vehicle on which it is installed. The device is offered in three versions. It is suggested that an operator adjustment procedure may increase the device effectiveness.
- 4) The air conditioning system design on a particular vehicle. The fuel economy benefit will be greater on certain types of systems than on others.
- 5) The type of driving cycle used. The system will be more effective in urban driving with increased acceleration mode operation than in highway "steady state driving".

The EPA has tested the device at the Motor Vehicle Emission Laboratory and reviewed data submitted from other laboratories. The EPA has concluded that the "Pass Master" does result in a small but real fuel economy benefit when the vehicle air conditioner is in use.

The improvement in fuel economy attributable to the "Pass Master" when the vehicle air conditioner is in use will vary between 0 and 4% depending on the vehicle, the type of air conditioner used, vehicle driving patterns, ambient temperature, and the specific calibration of the unit. Some drivers in warm climates who frequently use their air conditioner might experience up to a 4% improvement in fuel economy when driving in conditions that frequently actuate the device. The device will show the greatest improvement in urban stop-and-go driving with less or no improvement noted in steady state highway type conditions.

The device has no safety related problems and is easy to install. The emissions of test vehicles running with the air conditioner on are generally reduced when the "Pass Master" is used. No information is available to permit an evaluation of any reduction in passenger compartment cooling with the "Pass Master" installed.

Date

David G. Hawkins

Assistant Administrator

for Air, Noise, and Radiation

EPA Evaluation of "Pass Master Vehicle Air
Conditioner Compressor Cut-Off Device" under Section
511 of the Motor Vehicle Information and Cost Savings Act

The following is a summary of the information on the device as supplied by the applicant and the resulting EPA analysis and conclusions.

1. Marketing Identification of the Device:

Pass Master Vehicle Air Conditioner Compressor Cut-Out.
Model Numbers PM-2, PM-3, PM-4 through PM-14.

2. Inventor of the Device and Patents:

- a. Ralph Haroldson, U.S. Patent No. 3462964
3233 Chapel Downs Drive
Dallas, Texas 75229
- b. Norman Halem, U.S. Patent No. 3918543
3053 Skyline Drive
Cocoa, Florida 32922

3. Identification of Device Manufacturer:

Halem Industries, Incorporated
414 Highpoint Drive
Suite 206
P.O. Box 1419
Cocoa, Florida 32922

4. Manufacturing Organization Principals:

Norman Halem-President
Fred Robin-Secretary

5. Identity of Applicant: Organization Making Application:

Halem Industries, Incorporated
414 Highpoint Drive
Suite 206
P.O. Box 1419
Cocoa, Florida 32922

6. Identification of Applying Organization's Principals:

Norman Halem-President
Fred Robin-Secretary

Norman Halem will represent Halem Industries in communicating with EPA.

7. Description of the Device (as supplied by applicant):

- a) "Purpose of the Device: This device was developed to improve the fuel mileage, acceleration performance, vehicle safety and engine ~~pollution emissions on air conditioned vehicles."~~
- b) "Theory of Operation: The Pass Master Vehicle Air Conditioner Compressor Cut-Out device is an engine intake manifold vacuum switch capable of sensing the vacuum drop which occurs in the engine intake manifold during engine power demand periods and interrupts the electrical power delivered to the vehicle air conditioner compressor clutch. Thus, the switch, upon sensing engine power demands such as, vehicle starting from rest, climbing hills or passing, will activate, open the electrical circuit providing power to the compressor clutch and idle the compressor. This will then remove the 5 to 15 horsepower compressor load from the engine and allow the vehicle to accelerate in its driving pattern without the drag from the compressor. Only a slight effect to the air conditioned comfort is noted due to the evaporator fan remaining on during this 5 to 30 second normal acceleration period. There is sufficient stored cooling in the evaporator coils to maintain cooling for this time period. In the event the driver accelerates too long and is reminded of his "heavy foot", he would ease up on the acceleration, restore the air conditioning, and at the same time subconsciously be retrained to drive for better fuel mileage."
- c) "Detailed Description of Construction and Operation: The Pass Master system is comprised of a vacuum switch and all necessary hardware to affix it to an air conditioned vehicle. The switch itself is comprised of a switching element (Honeywell Micro Switch-5 ampere rated), encased in a plastic housing with a 2 inch diameter thin metal diaphragm serving as the actuator. The switch is connected to the "host system" as shown in Attachment A."

8. Applicability of the Device (claimed): "Pass Master is applicable to ALL carbureted engine vehicles, regardless of the number of cylinders, horsepower rating, carburetion, transmission, ignition, year, make or model. It functions ONLY on engines containing intake manifold vacuums which vary as a direct analog to acceleration or engine power demands. This includes all carbureted engines, some diesels, fuel injected engines, and some turbocharged engines. But its main purpose is for the carbureted engine.

Three models are provided to suit the three basic types of engines used in vehicles. Switches can also be fabricated to suit any vacuum threshold.

Model: PM-4 (4 cylinder engines)
 PM-6 (6 cylinder engines)
 PM-8 (8 cylinder engines)

The difference in the switch model is related to the setting of the vacuum threshold, with the higher number switch relating to the higher vacuum cut-off levels of that switch. Although any switch model will work in any size engine, it was determined that a better mix of fuel economy and air conditioned cooling comfort was attained by providing the three models to suit the three general engine types".

9. Cost: No cost information was submitted with the application.

Device Installation (as supplied by the applicant): "The Pass Master can be installed with common tools such as a knife, screw driver, drill or metal punch as follows:

- 1) Locate a manifold vacuum source rubber tube. This is the most difficult part of the installation. A mechanic should be able to point it out.
- 2) Cut the vacuum line with the knife and insert the provided plastic tee.
- 3) Locate the electrical wire going to the compressor clutch. Cut with knife and strip ends back 1/4 inch.
- 4) Position the Pass Master case on the wheel-well in the vicinity of the air conditioner compressor, making sure the length of tubing provided and the electrical wires will reach their respective connection places.
- 5) Drill or punch a hole in the fender well.
- 6) Screw Pass Master in place.
- 7) Run vacuum line from Pass Master to plastic tee, making sure it does not rest on hot engine parts.
- 8) Run electrical wire to compressor clutch wire and splice into circuit. Attach the wire with the wire fasteners provided.
- 9) Installation is now complete. To check out the system do the following: Apply the vehicle brakes, put car in drive or 1st gear. Have someone observe the compressor clutch while you gently accelerate the engine. (Let out clutch on standard transmission vehicle, but do not let the vehicle move). Air conditioner clutch will disengage just as soon as the engine loading drops the manifold vacuum to the point where the Pass Master switch will sense it and open the clutch circuit.

Pass Master will now automatically turn the air conditioner compressor OFF during engine acceleration periods and provide the vehicle with optimum performance, fuel mileage and safety with air conditioning." See Attachment B for further installation instructions.

10. Device maintenance (claimed): "The device requires no maintenance and will last the life of the vehicle."

11. Effects on Vehicle Emissions (non-regulated), (as supplied by applicant):
 "The Pass Master can not adversely affect pollution emissions of the vehicle engine in its operating state. Since engine loading is reduced during power demand periods of vehicle acceleration, the Pass Master will reduce engine emissions."

In the event of hose failure or accidental rupture of the diaphragm or case, the engine manifold will be vented to atmosphere through the 1/8 inch ID tubing. The air conditioner will then cycle to the constant OFF state, which the driver should notice and affect remedy. The likelihood of hose failure is similar to that of the other vacuum hoses in the engine compartment provided by the vehicle manufacturer."

12. Effects on Vehicle Safety (claimed): "Pass Master has a positive effect on vehicle safety. Since the unit will remove the compressor load from the engine during engine power demand periods, such as climbing hills, starting from rest or passing, it will permit the vehicle to perform as though it were suddenly provided 5 to 15 additional horsepower. This power is being shunted from the compressor load."

13. Test Results Submitted by Applicant:

- a. Automobile Club of Southern California
 Several tests were run on a 1972 Nova to determine the air conditioning buyback. The data from these tests is presented in Attachment C.
- b. Bartlesville Energy Research Center of the U.S., ERDA, DOE, Testing.
 Two 1977 vehicles, a Pinto and a Cutlass were tested on Hot LA-4 tests at 100°F. This test data is presented in Attachment D.

14. Information collected by E.P.A.

- a. A 1978 Pinto was tested using 1975 CVS Federal Test Procedure (FTP) tests, Highway Fuel Economy Tests (HFET), and Hot 2-bag LA-4 tests at 75°F.
- b. A 1979 Chrysler LeBaron was tested using Hot LA-4 tests at 75°F and 85°F.
- c. A 1979 Buick Regal was tested using 1975 FTP and HFET tests.
- d. A 1975 Plymouth Valiant was tested using Hot LA-4 tests at 75°F and 100°F.

The EPA test data is summarized in Attachment E. Actual EPA test sheets are presented in Attachment F.

15. Analysis

- a. Description of the Device. The "Pass Master" device is adequately described by the applicant.

- b. Applicability of the Device: The device applicability is adequately described in the application. It is however not mentioned that the "Pass Master" is only applicable to vehicles with air conditioning systems.
 - c. Device Installation: The installation is straightforward and requires about 15 minutes. No technical expertise is required. The only difficulty is locating a proper source of manifold vacuum. The installation instructions are clear and complete.
 - d. Device Maintenance: The applicant's statement that no maintenance is required appears to be correct.
 - e. Effect on Vehicle Emissions (non-regulated): Installation of the "Pass Master" device should have no effect on non-regulated vehicular emissions.
 - f. Effect on Vehicle Safety: The applicant's claim that the "Pass Master" has a positive effect on vehicle safety by allowing more power to the drive train when required appears to be correct. No safety problems should occur with installation of the device.
 - g. Test Results submitted by the Applicant: It must be understood when looking at the test data that the "Pass Master" functions only when the air conditioning system in a vehicle is turned on. The device then is supposed to negate part of the fuel economy penalty incurred by utilization of the air conditioning system. Therefore, the important characteristic to look for is the "percent buy-back". This figure indicates the percent of the fuel economy air conditioning penalty saved by the device.
1. The Automobile Club of Southern California Testing. This data appears to be single bag LA-4 urban cycles and the Federal Highway Fuel Economy Test cycle.

The actual testing is not well documented. Several important parameters are not recorded. These include: (1) ambient temperature (2) type of AC unit in vehicle, (3) status of vehicle windows during testing, (4) interior cooling fan status, (5) AC setting and humidity. Nevertheless the data clearly shows that the "Pass Master" allowed an average of 43% buy-back of the air conditioning penalty on one particular vehicle, a 1972 Nova. The emission penalty of using air conditioning was also reduced by the "Pass Master". No specific details were available about the specific "Pass Master" calibration used in the testing.

2. The U.S. ERDA Test Data. This test data was taken on two vehicles; a Cutlass and a Pinto. The tests appear to be Hot LA-4 test cycles at 100°F. Although not clearly stated it also appears that the windows were open and the interior circulation fan turned on high. The Cutlass air conditioning was declutched 30-36% of the total cycle time. The Pinto with a 10"-12" Hg. vacuum setting declutched the air conditioning compressor 27% of the time. Temperature measurements were taken at the evaporator outlet air and the recirculated air to evaporator.

The test data shows significant buyback on emissions and fuel economy. Fuel economy buybacks of 46.2% and 54% were noted. The testing appears to be valid data based on averages of 2 or 3 tests each. Corresponding emission buybacks of CO = 89%, HC = 114%, and NOx = 22% were noted on the Cutlass. Pinto emission reduction buyback figures of CO = 88%, HC = 124%, and NOx = 24% were noted.

The important point about this data is that the settings used to shut off the compressor were different than those described in the application for evaluation. The application discusses part models PM-4, PM-6, and PM-8 for 4, 6 and 8 cylinder vehicles respectively. Conversations with Mr. Halem, the applicant, indicated that the numerical part of the model designation indicates the switch point in inches of Hg. vacuum. For example, the PM-4 unit used in EPA testing of a 4 cylinder Pinto cut the compressor off at 4 inches of Hg. and turned on at 5 inches of Hg.

The 4 cylinder Pinto tested by ERDA was equipped with a switch set to turn the compressor off at 10 inches Hg and on at 12 inches Hg. While this specification is not given for the Cutlass, the percentage of the cycle the AC compressor was declutched was higher for the Cutlass than for the Pinto, 30-36% vs. 27%. Therefore a rather high "Pass Master" set point must have been used on the Cutlass. Mr. Halem, the applicant, indicated the ERDA testing was attempted to determine the maximum possible buybacks which could be accomplished. No interior temperature readings were taken other than those mentioned.

The ERDA data appears to be a good analysis of the upper bound of air conditioning (AC) penalty buyback possible with the Halem Device.

h. The EPA Testing.

The purpose of the EPA testing was to determine the fuel economy and emission benefits of installing production models of the "Pass Master" device. Therefore, 4, 6, and 8 cylinder vehicles were used with the corresponding PM-4, PM-6, and PM-8 "Pass Master" models. The windows were open during the tests with the interior circulation fan turned on high and the AC turned to maximum. This condition would present the maximum cooling load on the AC unit.

1. The Pinto (vehicle is described in Attachment G) was tested with the air conditioning (AC) off, then on without the "Pass Master", and finally with the AC on and the "Pass Master" installed and operating. Visual observation of the compressor cut out activating showed that the "Pass Master" deactivated the AC clutch for 20 seconds of the 1374 seconds of the LA-4 (the first two parts of the FTP driving cycle). According to Mr. Halem, this was not as it should be. He suggested that Pinto's were not representative vehicles as the vacuum did not go down low enough to activate the "Pass Master" switch except during very hard accelerations. The Federal Test Procedure (FTP) and the Highway Fuel Economy Test (HFET) were run on a Clayton splitroll dynamometer. The Hot LA-4

tests were run on a Labeco Electric singleroll Dyno. The difference in the percent buyback figures between FTP and Hot LA-4 is due to increased loading caused by the Labeco Dyno at low speed which caused the Pinto manifold vacuum to reach the "Pass Master" cut out set point more often. The Pinto data demonstrates that the effectiveness of the device depends on 1) driving habits (how hard accelerations), 2) device calibration, and 3) vehicle vacuum characteristics. It must be noted that the AC penalty is a small number in actual miles per gallon. The percent buyback is well within the test to test repeatability. Therefore only buyback percentages above 20% can individually be taken as an indication of device effectiveness.

2. The Chrysler LeBaron (vehicle is described in Attachment G) was tested in the same three configurations as the Pinto. Only LA-4 tests were performed at ambient temperatures of 75°F and 85°F. A larger percentage was noted on HC hydrocarbons (52.7 and 47.8% buyback) and Carbon Monoxide (15.8% and 32.33% buyback). The NOx penalty at 85°F is not understood.

Confidence levels for emissions and fuel economy were calculated for both 75° and 85° LA-4s. The levels are given below.

<u>L</u>	<u>HC</u>	<u>CO</u>	<u>NOx</u>	<u>F.E.</u>
LeBaron 75° Hot LA-4	97* >	67 >	71 >	95** <
LeBaron 85° Hot LA-4	83 >	80 >	67 <	75 <

* This reads: there is a 97% confidence that HC value with the device off, AC on, is greater than with the device on, AC on.

** This reads: there is a 95% confidence that the Fuel Economy with the device off, AC on, is less than with the device on, AC on.

These values indicate that the "Pass Master" had a small beneficial impact on the LeBaron at both 75°F and 85°F. The actual fuel economy benefit in miles per gallon is quite low. (.1 mpg and .195 mpg) but definitely there. Overall, fuel economy improvement was .68% and 1.3% for the 75°F and 85°F tests respectively.

3. The Buick Regal (see attachment G for vehicle description) was tested on the Clayton Dyno using both FTP and HFET test procedures. The test results are given in attachments E and F. The "Pass Master" caused impressive reductions in the AC penalty in both emissions and fuel economy for this car. Most noticeable was the reduction in Hydrocarbon penalty. The fuel economy buyback figures of 8.57% and 18.18% are small but significant. Numerically, these numbers represent .3 mpg (1.96%) and .6 mpg (2.73%) improvements in fuel economy.

Confidence levels were calculated using normalized data for the Pinto and Regal. The combining of the test data for both vehicles allows a statistical analysis. The confidence levels are:

	HC	CO	NOx	F.E.
Pinto/Buick FTP	62*	63	60	51**
Pinto/Buick HFET	68	72	66	59

* This reads: there is a 62% confidence that the HC value with the device off, AC on, is greater than the HC value with the device on, AC on.

** This reads: there is a 51% confidence that the Fuel Economy with the device off, AC on, is less than the Fuel Economy value with the device on, AC on.

The results indicate again that the "Pass Master" does have a positive effect on Fuel Economy and Emissions.

4. The Dodge Dart (see Attachment G for vehicle description) was tested using the LA-4 test procedure at 75° F and 100°F. The averaged test results show significant buyback in Fuel Economy but very difficult to interpret results on emissions. The vehicle runs at a very low manifold vacuum compared to most other cars. Therefore, the Pass Master was probably activated more on this car than on other test vehicles. The HC results show a substantial HC penalty in using the "Pass Master". The CO results are so varied that no significance can be determined from the data. The NOx numbers indicate a small penalty increase when the "Pass Master" is used. The Fuel Economy numbers however of 52.0% and 39.13% buyback are very impressive. The actual HC penalty was .022 gm/mile increase at 75°F and a .0015 gm/mile decrease at 100°F. The fuel economy figures however were .65 miles/gallon and .45 miles/gallon.

Confidence levels could not be calculated on the Dart at 85°F because the Fuel Economy variance was zero. Confidence levels were run on the LeBaron/Dart tests at 75°F data. The levels are given below:

	HC	CO	NOx	F.E.
LeBaron/Dart Hot LA-4 at 75°	53*	63	57	80**

* This reads: There is a 53% confidence that the HC value with device off, AC on, is greater than HC value with device on, AC on.

** This reads: There is an 80% confidence that the Fuel Economy value with the device off, AC on, is less than the Fuel Economy value with device on, AC on.

5. Summary of EPA Data Analysis

The four vehicles tested showed varying response to installation of the "Pass Master" device. However, the similar direction of response shows that the "Pass Master" does reduce the penalty of air conditioning use on fuel economy and emissions for most cars. A summary table of the buyback percentages is given below:

Vehicle	HC	CO	Percent Buyback		F.E.
			CO ₂	NOx	
Pinto FTP	0.0%	None	(-)5.56%	(-)8.06%	(-)8.7%
Pinto HFET	N/A	N/A	(-)10.34%	(-)5.15%	(+)6.25%
Pinto LA-4 @ 75°F	(+)75%	N/A	(+)27.4%	(+)28.0%	(+)25.0%
LeBaron LA-4 @ 75°F	(+)53%	(+)16%	(+)7.72%	(+)13.48%	(+)7.98%
LeBaron LA-4 @ 85°F	(+)48%	(+)32%	(+)1.71%	(-)27.9%	(+)13.49%
Regal FTP	N/A	(+)79.6%	(+)1.06%	(+)32.8%	(+)8.57%
Regal HFET	N/A	(+)90.0%	(+)8.7%	(+)4.95%	(+)18.18%
Dart Hot LA-4 @ 75°F	None	N/A	(+)51.3%	(-)7.5%	(+)52.0%
Dart LA-4 @ 100°F	None	N/A	(+)41.0%	(-)11.85%	(+)39.13%

No vehicle interior temperature data was taken. The interior passenger comfort penalty by sustained activation of the "Pass Master" device was not determined. On most vehicles the penalty would be acceptable. Only those vehicles which operate for sustained periods of time below the "Pass Master" activation setting could experience a loss of A/C cooling.

There are several types of Air Conditioning (AC) systems found on American cars. While most systems incorporate the same major components; compressor, condenser, evaporator, receiver-dryer, and expansion valve, the methods of controlling the vehicle interior temperature varies. The effect of the "Pass Master" compressor cutout switch will depend on the type of system installed in the vehicle and to what position the AC control unit is set.

Present air conditioning systems sense an evaporator coil parameter such as refrigerant pressure or temperature or outlet air temperature and use this parameter to control the amount of refrigerant to the evaporator coil. The method of controlling the refrigerant varies. The actual cool air to the vehicle interior is controlled by opening or closing baffles which control the air flow, not the refrigerant. There are basically two refrigerant control systems:

- 1) The Thermostatic Switch type and the Accumulation Type sense the evaporative temperature or pressure and turn the compressor clutch on or off to maintain proper evaporator temperature. This is called the "Cycling Type".
- 2) The Suction Throttling Valve (STV) Type, the Valve in Receiver (VIT) Type, and Evaporator Pressure Regulator (EPR) Type regulate the refrigerant to the compressor to maintain proper evaporator temperature. This is called the "Continuous" type. The Compressor runs continuously when the air conditioner is turned on.

Recently several vehicle manufacturers have incorporated both types of control on vehicles. When the AC switch is on "Max Cool", the compressor runs continuously. When at Normal or "FE" settings the compressor cycles.

The "Pass Master" device will work best on systems designed to operate in a "Continuous" mode. During the acceleration modes the compressor will be cut out by the "Pass Master" device. Since the compressor will run enough during non-acceleration modes to control evaporative temperature, the reduced engine load in acceleration should result in fuel economy savings.

On "Cycling" type systems, the "Pass Master" may or may not have an effect. If the car accelerates while the compressor is not engaged, the "Pass Master" will have no effect. If the compressor is engaged, the vehicle will accelerate under less load with the "Pass Master". Upon completion of the acceleration the compressor will run to correct the evaporative temperature. The fuel saving will be caused by making the compressor run during more efficient engine operation modes (cruise versus acceleration). Due to the intermittent cycling and the delayed compressor operation, less fuel economy gains are expected on this type of air conditioning system.

The four late model test vehicles had different A/C type systems. All but the Buick Regal cycled the compressor during the "Max AC" testing. The Regal compressor is in continuous operation when the "Max AC" setting is selected. The test data does not support the differentiation between the cyclic and continuous type systems. The largest improvement was noted on a cyclic system, the Dodge Dart. It is our judgment that the differentiation is still valid. The data masks the difference because the PM-4, PM-6, and PM-8 were set more appropriately for some test vehicles than others.

The largest drawback with the "Pass Master" device is that it is not optimized for each type of vehicle. A suggested improvement would be to make it's vacuum cutout setting adjustable and supply in the installation instructions an operator optimization procedure. This suggestion would insure that the device operated correctly for each vehicle. With all of the varied engine sizes, manifold vacuum actuators and modifiers, vehicle sizes, axle ratios, and transmissions, it is impossible to characterize the vacuum vs. acceleration rate characteristics of all vehicles with just three devices.

The final consideration as to the effectiveness of this device is a geographic one. The device only works when the AC is used. The yearly fuel economy benefit would depend on how much the vehicle air conditioners are used.

For the Dodge Dart which gave the largest improvement in fuel economy the savings in actual fuel economy was 4.04%. If an owner lived in a warm climate and used his (her) air conditioner 75% of the time, he (she) could see a fuel economy benefit of about 3%. An owner in a colder climate may use his (her) air conditioner 10% of the time. The corresponding fuel savings would only be 0.4%. This is an optimum fuel economy gain. The other three vehicles did not show the same amount of improvement.

16. Conclusions

The overall conclusion of this report is that the "Pass Master" does reduce vehicle emissions and fuel consumption by a small but discernible amount when the air conditioner is turned on.


The amount of fuel economy benefit depends on several factors. The most important factor is the amount that the vehicle air conditioner is used. Drivers in warm climates who frequently use their air conditioner may experience up to a 4% improvement in fuel economy when driving in situations that frequently activate the device. The second important factor is the suitability of the device to the particular manifold vacuum characteristics of the vehicle. The improvement in fuel economy with the air conditioner on will vary from 0 to 4% depending on the vehicle and the specific calibration of the "Pass Master" unit. Another factor affecting the performance is the type of vehicle air conditioning unit to which the "Pass Master" is applied. "Continuous" systems should realize a larger benefit than "Cycling" systems. The final factor is the amount of acceleration-mode operation. The "Pass Master" system will show the greatest improvement in urban stop-and-go driving. Less improvement or no improvement will be noted in steady state highway type conditions.

The emissions of test vehicles running with the Air Conditioning on are generally reduced when the "Pass Master" is used.

A larger general vehicle improvement may be found if the "Pass Master" was either produced for specific vehicle calibrations or the device was made "field-adjustable" so that it could be optimized for each vehicle.

Attachments





Attachment A	Schematic Representation of Pass Master Installation
Attachment B	Installation Instructions
Attachment C	Automobile Club of Southern California Test Data
Attachment D	U.S. ERDA Test Data
Attachment E	EPA Testing Summary (4 parts)
Attachment F	EPA Test Data Sheets
Attachment G	EPA Vehicle Description
Attachment H	Copy of Patent #3462964

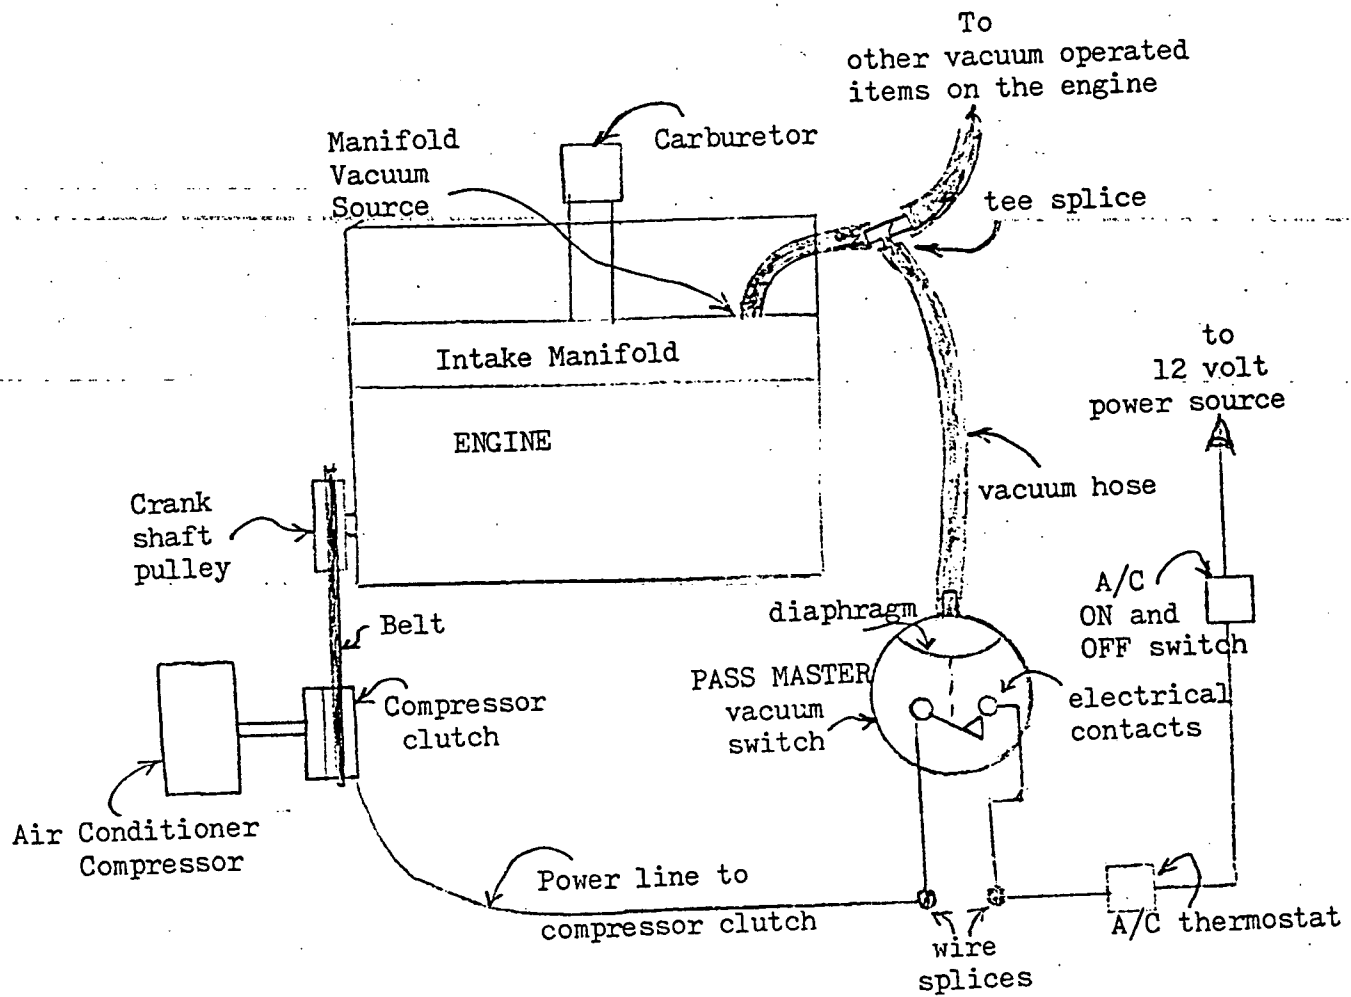

Schematic Representation of Pass Master Installation.

PASS MASTER AIR CONDITIONER COMPRESSOR CUT-OUT

The HALEM INDUSTRIES PASS MASTER Air Conditioner Compressor Cut-Out is a precision vacuum actuated switch, factory calibrated to cut off the air conditioner compressor during acceleration periods such as starting from stop, climbing hills or passing and turn it back on during deceleration or coasting. This will relieve the engine from its power robbing, fuel consuming, pollution causing burden and restore full vehicle performance to levels of non-air conditioned vehicle standards.



INSTALLATION INSTRUCTIONS

1. Select a mounting position for the PASS MASTER on the side wall, fender well or fire wall of the engine compartment, as far as practicable from any heat producing source. The mounting surface must be flat to avoid warping the plastic case.
2. Make sure the PASS MASTER lead wire will easily reach some point on the electrical wire leading to the air conditioning compressor clutch.
3. Make sure the rubber tubing will reach some point on the intake manifold vacuum line. This can usually be found near the carburetor and can be identified by the rubber or metal tubing routed to vacuum accessories or to a port on the distributor advance mechanism.
4. In the event compressor cut off during idle is desired, use the vacuum source above the carburetor butterfly valve. (Some cars may not provide this vacuum source.)
5. If compressor off at idle is NOT desired, make sure the vacuum source selected is below the carburetor butterfly valve. This vacuum source is the same as the intake manifold vacuum. If not sure where the vacuum source is located, your gas station attendant can point it out.
6. Drill or punch two holes to fit the PASS MASTER and mount it with the sheet metal screws provided. If the surface is irregular, one screw tightened snugly will suffice to keep the unit in place and yet not permit warping of the case.
7. Cut the electrical wire leading to the compressor clutch, strip about 3/8-inch of insulation off the two leads and attach the PASS MASTER lead wire using the wire nuts provided.
8. Cut the vacuum line to the vacuum source, insert the tee provided and connect your PASS MASTER with the provided rubber tube. If your car has a metal vacuum line, cut two one inch pieces from your rubber tubing and use these to splice the tee into the line.
9. Your HALEM INDUSTRIES PASS MASTER Compressor Cut-Out is now ready for use and should require NO adjustments. If, however, your car is equipped with a simultaneous heat/cool mix, climate control system, you may have to adjust the temperature controller to compensate for the cycling off of the air conditioner compressor. Trial and error will determine the optimum setting.

Your HALEM INDUSTRIES PASS MASTER was designed to function on all internal combustion engines, including yours, so follow our installation instructions carefully and enjoy its benefits.

**INCREASES ENGINE POWER FOR MAXIMUM
ACCELERATION WITH AIR CONDITIONING**



HALEM INDUSTRIES, INC. P.O. BOX 1419 COCOA, FL 32922 (305) 636-7610



Automobile Club of Southern California

HEADQUARTERS: 2601 SOUTH FIGUEROA STREET • LOS ANGELES, CALIFORNIA 90007
MAILING: P. O. BOX 2890 TERMINAL ANNEX • LOS ANGELES, CALIFORNIA 90051

THOMAS A. TAPPENDEN, SUPERVISOR
AUTOMOTIVE ENGINEERING DEPT.
(213) 746-4462

741-4497

April 4, 1977

Mr. Norman Halem
Halem Industries, Inc.
P. O. Box 1419
Cocoa, Florida 32922

Dear Mr. Halem:

Additional tests have been performed to evaluate the Pass Master Device.
Details of these tests are:

Test Vehicle - 1972 Chevrolet Nova - license #321 EXM.

Test Method - Emission and fuel consumption data was developed using the Federally approved test procedure. The vehicle was operated from a cold start for each test. Engine dwell, timing and idle speed were not changed between tests.

The test results: -	Emissions Grams/Mile			Fuel Consumption Miles/Gallon		
	HC	CO	NOX	Urban	Highway	Composite
Test #725 without Pass Master Device Air Conditioning Off	0.87	11.26	1.96	10.36	16.89	12.54
Test #726 with Pass Master Device Air Conditioning On	0.89	12.65	2.34	10.04	15.44	11.91
Test #727 without Pass Master Device Air Conditioning On	1.11	17.86	2.57	9.57	15.04	11.43

Enclosed are copies of the previous test results. If you have any questions do not hesitate to contact me.

Yours truly,

Thomas Tappenden
Thomas A. Tappenden

TAT/gm
Attachment

PASS MASTER DATA
COLD START CVS-2 AND HIGHWAY TEST

		BASELINE NO AC - A (725)	NO DEVICE AND AC - B %Diff (727)		W/DEVICE AND AC - C %Diff (726)		*BUY BACK
		A					
URBAN	CB	10.365	9.570	7.7	10.037	4.9	58.7
HIGHWAY	CB	16.894	15.004	11.2	15.437	2.9	22.9
COMPOSITE	CB	12.547	11.433	8.9	11.912	4.2	43.0
	HC	0.866	1.108		0.886		
	NOX	1.956	2.568		2.338		
	CO	11.261	17.862		12.646		
	CO2	835.078	895.027		860.850		

$$\text{*Buy Back} = \frac{C - B}{A - B} \times 100\%$$

PASS MASTER DATA
HOT START (CVS-2 STABLIZED AND HOT 505) TEST

		BASELINE A/C OFF A (720)	BASELINE A/C ON B1 (717)	%Diff A	BASELINE A/C ON B2 (719)	%Diff A	WITH DEVICE AND A/C C (718)	%Diff B1	%Diff B2	*BUY BACK B1	*BUY BACK B2
JRBN	CB	12.447	10.887	14%	10.687	14%	11.350	6.2	6.2	38%	38%
	HC	.822	1.013		.915		.938				
	CO	7.038	11.881		11.711		8.947				
	CO ₂	698.794	807.895		808.424		764.277				

$$\text{*Buy Back} = \frac{C - B1}{A - B1} \times 100\%$$

$$= \frac{C - B2}{A - B2} \times 100\%$$



U.S. DEPARTMENT OF TRANSPORTATION
TRANSPORTATION SYSTEMS CENTER

KENDALL SQUARE
CAMBRIDGE, MA 02142

In reply refer
to: TSC-332-


August 3, 1977

Mr. Norman Halem
Halem Industries, Inc.
PO Box 1419
Cocoa, FL 32922

Dear Norm:

Enclosed is a copy of a letter from B. H. Eccleston of Bartlesville Energy Research Center, to Walt Harriott, containing preliminary results of tests conducted on a 1977 Pinto and Cutlass to determine the effects of your air conditioner cut-out device on fuel economy. When I obtain results of further tests (including emissions data), I will forward them to you. Although the results are preliminary, we expect a final report in October.

Cordially,


K. J. Bray

Enclosure



UNITED STATES
ENERGY RESEARCH AND DEVELOPMENT ADMINISTRATION
BARTLESVILLE ENERGY RESEARCH CENTER
P.O. BOX 1398
BARTLESVILLE, OKLAHOMA 74003

July 15, 1977

Mr. Walter Harriott
Department of Transportation
Transportation Systems Center
Kendall Square
Cambridge, MA 02142

Dear Walt:

As promised, enclosed are updated and corrected tables of data from the ambient temperature effects project. The A and B tables, "Cycle fuel economy and emissions. . ." and "Cycle fuel economy at approximately 1 mile intervals. . ." are from the same source as the data sent to you with my letter of June 20, 1977. The tables have received preliminary checking and errors corrected; however, they are still subject to minor corrections. The additional C and D tables present temperature data during the cycle tests and fuel, torque, and temperature for the steady-state tests. A further description of the tabular material is enclosed as attachment No. 1.

Also enclosed as attachment No. 2 are results of tests with the air conditioner disconnect device. It was intended the device be evaluated over the full cold start through the two highway cycles; however, it was found that the tests would have to be replicated at least three times and evaluations made at all conditions within a short time frame. That is because we are attempting to determine a possible fuel savings approaching the repeatability of the test. Therefore, it was decided to repeat the tests as used in the preliminary evaluation (my letter of April 11, 1977 to you) but using the weatherized chassis dynamometer at 100° F ambient. The Cutlass (No. 158) and Pinto (No. 156) were used as the test vehicles and the hot transient and stabilized cycles of the 75 FET used for the dynamometer driving schedule. The procedure consisted of driving the vehicle on the dynamometer at 50 mph until the oil temperature approached equilibrium then taking bag samples for FET stabilized and hot transient cycles with the following variations:

1.	Air conditioner	on	device	off
2.	"	on	"	off
3.	"	on	"	on
4.	"	off	"	off
5.	"	on	"	off
6.	"	on	"	on
7.	"	off	"	off


Mr. Walter Harriott

-2-

July 15, 1977

The data are shown in attachment No. 2, pages 1 and 2. The Pinto is scheduled for retesting with a vacuum switch adjusted to increase the air conditioner "off" time. The temperature data shown should be used only as an indication of the magnitude of loss in cooling effectiveness as much more attention to thermocouple placement and air velocity would be required before they could be accepted as a measure of cooling effectiveness.

Sincerely,



B. H. Eccleston
Research Chemist
Fuel/Engine Systems Research

Enclosures:
As stated

Mr. Walt Harriott

Attachment #2

July 15, 1977

Cutlass #158

Test No.	HT + S cycles of FET, mpg			Avg.
	1	2	3	
Air conditioner off.....	13.64	14.11	-	13.88
Air conditioner on plus disconnect.....	12.67	12.89	-	12.78
Air conditioner on.....	11.54	11.55	11.40	11.50

Air conditioner off → on = $13.88 - 11.50 = 2.38$ mpg = 17.2% of off mpg

Air conditioner off → on with disconnect = $13.88 - 12.78 = 1.10$ = 7.9% of off mpg

$17.2 - 7.9 = 9.3\%$ savings in fuel economy

or

Air conditioner off → on = $.0720$ gpm - $.0870$ gpm = $.0149$ gpm to run air conditioner = 20.7%

Air conditioner off → on + disconnect = $.0720 - .0782$ gpm - $.0062$ gpm to run air conditioner with disconnect = 8.6%

$20.7 - 8.6 = 12.1\%$ savings in fuel consumption

NOTES:

- Above for hot transient plus stabilized phases of 1975 FET
- Disconnect device declutched air conditioner 30-36% of total cycle
- Temperature of test cell was 100°F
- Temperatures at air conditioner outlet with all vents open and high fan speed

Air conditioner on	outside air to evaporator	57°
Air conditioner on	recirculated air to evaporator	44°
Air conditioner on + device	outside air to evaporator	66°
Air conditioner on + device	recirculated air to evaporator	55°

Mr. Walt Harriott

July 15, 1977

Pinto #156 - 27% off

	HT + S cycles of FET, mpg			
	Avg.	N	S	.95 ts/ n
Air conditioner off.....	19.86	6	.97	1.02
Air conditioner on disconnect on.....	18.31	3	.165	.50
Air conditioner on.....	17.18	10	.49	.37

Air conditioner off $\rightarrow$ on = $19.86 - 17.18 = 2.68$ mpg = 13.5% of off mpg

Air conditioner off $\rightarrow$ on with disconnect = $19.86 - 18.31 - 1.55$ mpg =
7.8% of off mpg $13.5 - 7.8 = 5.7\%$

or

Air conditioner off $\rightarrow$ on = $.0504 - .0582 = .0078$ gpm required to run
air conditioner = 15.5%

Air conditioner off $\rightarrow$ on with disconnect = $.0504 - .0546 = .0042$ gpm
to run air conditioner = 8.3%

$15.5 - 8.3 = 7.2\%$ savings in fuel consumption or 54% of fuel to run
air conditioner recovered

NOTES:

- The above for HT + S cycles of 1975 FET
- The disconnect declutched the air conditioner 27% of cycle
- The disconnect turned air conditioner off at 10" Hg on at 12" Hg
- The test cell temperature was 100°F
- The air to the air conditioner evaporator was $\sim 108^\circ\text{F}$
- The temperature at center air conditioner vent with all vents open fan on high was:

Air conditioner on	outside air to evaporator	64°
Air conditioner on + device	outside air to evaporator	68°
Air conditioner on + device	recirculated air to evaporator	58°

Mr. Walt Harriott

Cutlass # 158 HOT TRANSIENT AND STABILIZED

Date	Test #	Fuel Economy (mpg)	Fuel	CO	HC (grams per mile)	NOX
------	--------	-----------------------	------	----	------------------------	-----

Air Conditioner OFF

6-30	7504	13.65	204	2.84	.34	1.57
6-30	7507	14.11	198	2.41	.32	1.51
	Avg.	13.88	201	2.63	.33	1.54

Air Conditioner ON WITH Disconnect device.

6-30	7505	12.68	220	3.45	.31	2.38
6-30	7508	12.91	216	3.25	.32	2.35
	Avg.	12.8	218	3.37	.32	2.37

Air Conditioner ON

6-30	7502	11.55	242	12.53	.46	2.67
6-30	7503	11.56	241	8.33	.38	2.52
6-30	7506	11.42	245	7.22	.36	2.63
	Avg.	11.51	243	9.36	.40	2.61

SUMMARY

A = (on-off)	-2.37	42	6.73	.07	1.07
B = On - (on with PM)	-1.29	25	5.99	.08	.24
% Recovered = (B - A)100	54	60	89	114	22
% Reduction = (B - on)100	11.2	10.1	64	20	9.2

Mr. Walt Harriott

Pinto # 156 HOT TRANSIENT AND STABILIZED

Date	Test #	Fuel Economy (mpg)	Fuel	CO (grams per mile)	HC	NOX
Air Conditioner OFF						
7-13	7536	20.35	137	9.11	.45	1.73
7-13	7533	18.51	151	20.73	1.31	2.28
	Avg.	19.43	144	14.92	.88	2.01

Air Conditioner ON WITH Disconnect device.

7-13	7539	18.54	150.4	13.57	.63	2.54
7-13	7537	18.26	153.6	17.38	.94	2.81
7-13	7535	18.22	153.3	17.06	.89	2.64
	Avg.	18.34	152.2	16.00	.82	2.60

Air Conditioner ON

7-13	7538	17.72	157.4	21.91	1.08	2.71
7-13	7534	17.10	163.5	26.29	1.17	2.87
	Avg.	17.41	160.5	24.1	1.13	2.79

SUMMARY

A = (on-off)	-2.02	16.5	9.18	0.25	0.78
B = On - (on with PM)	-0.93	8.3	8.10	0.31	0.19
% Recovered = (B - A)100	46	50	88	124	24
% Reduction = (B - on)100	5.3	5.2	33.6	27.4	6.8

Attachment E

Passmaster Testing

Pinto

A. FTP

<u>Date</u>	<u>Test #</u>	<u>HC</u>	<u>CO</u>	<u>CO₂</u>	<u>NOx</u>	<u>F.E.</u>	<u>Configuration</u>
10-25-79	80-0305	.27	4.4	410	.71	21.2	AC off
10-31-79	80-0391	.22	3.6	467	1.38	18.7	AC on; Passmaster On
11-1-79	80-0393	.22	2.4	464	1.33	18.9	AC on; Passmaster Off
Percent buyback		0.0%	None	(-)5.56%	(-)8.06%	(-)8.7%	

B. HFET

10-24-79	80-0304	.02	.6	324	.48	27.3	AC off
10-31-79	80-0392	.03	.1	357	1.50	24.8	AC on, Passmaster On
10-26-79	80-0308	.02	.8	349	.62**	25.3	AC on, Passmaster On
11-1-79	80-0394	.02	.2	356	1.45	24.9	AC on, Passmaster Off
Percent buyback		*	*	(+)9.38%	**	(+)6.25%	

C. Hot LA-4

10-29-79	80-0309	.13	.6	386	.92	22.9	AC off
10-29-79	80-0397	.14	.4**	431	1.10	20.5	AC on, Passmaster On
10-29-79	80-0312	.17	1.3	448	1.17	19.7	AC on, Passmaster Off
Percent buyback		(+)75%		(+)27.4%	(+)28.0%	(+)25.0%	

*Numbers are too low for meaningful analysis.

**Questionable data.

Chrysler LeBaron

A. Hot LA-4 Data at 75°F

<u>Date</u>	<u>Test #</u>	<u>HC</u>	<u>CO</u>	<u>CO₂</u>	<u>NOx</u>	<u>F.E.</u>	<u>Configuration</u>
11-7-79	80-0462	.699	4.735	544	1.569	16.04	AC off @ 75°F
11-7-79	80-0463	.635	4.469	549	1.554	15.85	AC off @ 75°F
11-7-79	80-0464	.736	7.008	588	1.955	14.74	AC on, P.M.off @ 75°F
11-7-79	80-0465	.735	8.590	585	1.832	14.73	AC on, P.M.off @ 75°F
11-7-79	80-0466	.701	7.875	585	1.874	14.78	AC on, P.M.on @ 75°F
11-7-79	80-0467	.682	6.716	582	1.824	14.88	AC on, P.M. on @ 75°F
	% buyback	(+)52.7%	(+)15.8%	(+)7.72%	(+)13.48%	(+)7.98%	

B. Hot LA-4 Data at 85°F

11-8-79	80-0480	.769	6.483	524	1.375	16.50	AC off at 85°F
11-8-79	80-0481	.728	6.716	526	1.386	16.35	AC off at 85°F
11-8-79	80-0482	.963	15.081	561	1.661	15.08	AC on, P.M. off @ 85°F
11-8-79	80-0484	1.218	22.31	558	1.444	14.88	AC on, P.M. off @ 85°F
11-8-79	80-0485	.967	15.580	566	1.573	15.03	AC on, P.M. on @ 85°F
11-8-79	80-0486	.884	13.990	555	1.628	15.32	AC on, P.M. on @ 85°F
	% buyback	(+)47.8%	(+)32.33%	(+)1.71%	(-)27.91%	(+)13.49%	

Buick RegalA. FTP

<u>Date</u>	<u>Test #</u>	<u>HC</u>	<u>CO</u>	<u>CO₂</u>	<u>NOx</u>	<u>F.E.</u>	<u>Configuration</u>
11-7-79	80-0447	.85	8.5	455	1.18	18.8	AC off
11-8-79	80-0449	1.09	17.8	549	1.79	15.3	AC on, Passmaster off
11-15-79	80-0451	.73	10.4	548	1.59	15.6	AC on, Passmaster on
	% buyback	(+)114.0%	(+)79.6%	(+)1.06%	(+)32.8%	(+)8.57%	

B. HFET

11-7-79	80-0448	.08	.7	349	1.30	25.3	AC off
11-8-79	80-0450	.19	4.7	395	2.31	22.0	AC on, Passmaster off
11-15-79	80-0452	.09	1.1	391	2.26	22.6	AC on, Passmaster on
	% buyback	*	(+)90.0%	(+)8.7%	(+)4.95%	(+)18.18%	

* Numbers too small for meaningful analysis.

Dodge Dart

A. Hot LA-4 at 75°F

<u>Date</u>	<u>Test #</u>	<u>HC</u>	<u>CO</u>	<u>CO₂</u>	<u>NOx</u>	<u>F.E.</u>	<u>Configuration</u>
11-27-79	80-0772	.492	.177	505	1.50	17.5	AC off @ 75°F
11-27-79	80-0723	.491	.314	504	1.48	17.5	AC off @ 75°F
11-27-79	80-0724	.400	.338	548	1.82	16.1	AC on, P.M. off @ 75°F
11-27-80	80-0725	.408	.120	539	1.83	16.4	AC on, P.M. off @ 75°F
11-27-79	80-0726	.518	.158	524	1.84	16.9	AC on, P.M. on @ 75°F
11-28-79	80-0727	.510	.234	523	1.86	16.9	AC on, P.M. on @ 75°F
	% buyback	(-)125%*	*	(+)51.3%	(-)7.5%	(+)52.0%	

B. Hot LA-4 at 100°F

12-1-79	80-0793	.312	.243	525	1.93	16.7	AC off at 100°F
21-1-79	80-0792	.303	.210	521	2.00	16.9	AC off at 100°F
12-1-79	80-0791	.356	.292	565	2.67	15.5	AC on, P.M. off @ 100°F
12-1-79	80-0790	.152	.208	559	2.61	15.8	AC on, P.M. off @ 100°F
12-1-79	80-0789	.302	.212	546	2.78	16.1	AC on, P.M. on @ 100°F
12-1-79	80-0788	.310	1.59	546	2.66	16.1	AC on, P.M. on @ 100°F
	% buyback	(-)97.2%	*	(+)41.0%	-11.85%	(+)39.13%	

* Numbers are too widely spread for accurate analysis.

REF.	VEHICLE I.D.	VEH. VIN	REF. PHS. REF. INT. CHG. CODE	ALT. H.P.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFIG.	OVER-DRIVE CODE	TEST TYPE
30	EXXON	0			2750	9.9			EXPERIMENTAL
									TEST PROCEDURE
									CVS 75-LATER

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	AXLE MEASURE	IGNITION	TIMING	% CO	IDLE RPM	SOAK PERIOD	MEASURED COASTDOWN TIME
				#1	#2	LEFT	RIGHT	COMB	

/- AMBIENT TEST CONDITIONS - /

WET	DYNO	CVS
29.69	61.0	75.0

TEST DATE	W. SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DYNO H.P.	TIME	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
10-23-79	10 0207	2750	7.4	10310.0	45.00	0.9341	44.6	

BAG 1	3.562 MILES	5.732 CM	8394.0 ROLL REVS.	VMIX = 2767.0 CU.FT.	DILUTION FACTOR = 11.332	AUX. FIELD1	AUX. FIELD2	AUX. CODE					
SITE #A215	EXHAUST SAMPLE	CORRECTED	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM							
HC-FID	15	48.0	149.21	15	2.1	3.12	141.36 PPM	6.43	1.806	1.122			
NOX-CHEM	16	22.1	23.03	15	0.1	0.11	22.93 PPM	3.23	0.908	0.564	MPG	KPL	L/100KM
CO2	23	42.5	1.034	23	2.0	0.042	0.946 %	1438.22	403.818	250.921	19.1	8.13	12.3
CO	20	60.0	1337.51	16	0.0	0.0	1337.51 PPM	122.90	34.508	21.442			

BAG 2	3.809 MILES	6.131 CM	8392.0 ROLL REVS.	VMIX = 4700.0 CU.FT.	DILUTION FACTOR = 19.144	AUX. FIELD1	AUX. FIELD2	AUX. CODE					
SITE #A215	EXHAUST SAMPLE	CORRECTED	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM							
HC-FID	14	17.5	13.60	14	5.7	4.34	8.89 PPM	0.68	0.179	0.111			
NOX-CHEM	15	9.7	5.72	15	0.4	0.20	4.82 PPM	1.15	0.301	0.187	MPG	KPL	L/100KM
CO2	23	29.8	0.691	23	2.0	0.042	0.651 %	1586.41	416.441	258.764	21.0	8.94	11.2
CO	17	30.4	74.24	17	0.0	0.0	74.24 PPM	11.51	3.020	1.877			

BAG 3	3.554 MILES	5.726 CM	8295.0 ROLL REVS.	VMIX = 2771.0 CU.FT.	DILUTION FACTOR = 13.467	AUX. FIELD1	AUX. FIELD2	AUX. CODE					
SITE #A215	EXHAUST SAMPLE	CORRECTED	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM							
HC-FID	14	27.2	20.16	14	9.7	3.60	16.83 PPM	0.76	0.214	0.133			
NOX-CHEM	15	31.9	16.10	15	0.3	0.15	15.46 PPM	2.24	0.629	0.391	MPG	KPL	L/100KM
CO2	23	40.6	0.941	23	2.0	0.042	0.942 %	1352.50	380.163	236.222	23.0	9.77	10.2
CO	18	25.2	120.94	18	0.1	0.47	120.94 PPM	11.01	3.096	1.923			

WEIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.53	9.6	409.43	0.52	21.1	9.0	11.2
BEFORE ROUNDING	0.5275	9.582	409.43	0.5173	21.0761	8.9626	11.1574
GRAMS/KM	0.327	5.95	251.0	0.32	20.1	8.5	11.7
BEFORE ROUNDING	0.32735	5.9545	250.92	0.3214	20.0705	8.5328	11.7194
UNWEIGHTED FTP	20.9	8.9	11.2		20.9394	8.9022	11.2330

COMMENTS: FUEL NOT CHANGED FOR TEST 2 FALSE STARTS

VOID

48197 0

DYNO SITE:0207 TEST # 80-0315

MFR.	VEHICLE I.D.	VEH- SION	EVP EVAP	INIT.	CHG.	REFEST CODE	AOMP	ALT. H.P. METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYNQ H.P.	TRANS. CONFG.	OVER- DRIVE CODE	/----- TEST TYPE -----/ EXPERIMENTAL /----- TEST PROCEDURE -----/ HWFE
30	FAXON								2750	9.9			

[illegible]

1- AMBIENT TEST CONDITIONS - 1

BARO	NET	DAY	CVS
"HG	HULB	HULB UNITS	UNIT
28.72	63.0	74.0	270

TEST DATE	HP	WYNO SITE	ACTUAL TEMPERATURE SETTING	INDICATED TEMPERATURE	DVO H.P.	WYNO H.P.	PIPE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
10-23-79	12	0207	2750	7.4		10321.0	45.00	0.9523	43.3	

SAG 1 10.191 MILES 16.401 KM 23762. ROLL REVS. VMIK = 4023.0 CU.FT. DILUTION FACTOR = 8.342		EXHAUST SAMPLE		DIESEL (POLL.) SAMPLE		CORRECTED		MASS EMISSIONS			AUX.			
SITE #A215		RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1	FIELD2	AUX. CODE
HC-FID	14	11.4	3.47	15	3.9	4.46	4.47 PPM	0.29	0.029	0.018				
NOX-CHEM	15	34.7	17.51	16	0.0	0.0	17.51 PPM	3.63	0.357	0.222				
CO2	23	61.1	1.561	23	2.0	0.042	1.561 %	3253.16	319.207	198.346	MPG	KPL	L/100KM	
CO	17	31.0	77.71	17	0.3	0.72	77.07 PPM	10.22	1.003	0.623	27.6	11.75	8.5	

EIGHTED VALUES	HC	CO	CO2	NOx	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.03	1.0	319.	0.35	27.7	11.8	8.5	
BEFORE ROUNDING	0.0246	1.003	319.20	0.3565	27.6553	11.7705	8.4957	
GRAMS/KM	0.016	0.62	194.	0.22	72-74 FTP	27.7	11.8	8.5
BEFORE ROUNDING	0.01790	0.6233	194.34	0.2215	27.6502	11.7553	8.5067	
					UNWEIGHTED FTP	27.7	11.8	8.5
					27.6502	11.7553	8.5067	

COMMENTS: OLD FUEL

MFR.	VER-	MFR.	REP.	RUN.	RETEST	ALT.	EQUIVALENT	ACTUAL		OVER-	/----- TEST TYPE -----/
CODE	VEHICLE I.D.	SION EVAP	INIT.	CHG.	CODE	H.P.	TEST	DYNO	TRANS.	DRIVE	EXPERIMENTAL
30	EXXON	9					WEIGHT	H.P.	CONF.	CODE	/----- TEST PROCEDURE -----/
							2750	9.9			CVS 75-LATER

	CURB	DRIVE		AXLE	/---	IGNITION	---	/-----	% CO	-----/	IDLE	SOAK	MEASURED		
PREP DATE	WEIGHT	AXLE	GAUGE	MEASURE	#1	#2	RPM	GEAR	LEFT	RIGHT	COMB	RPM	GEAR	PERIOD	COASTDOWN
		WEIGHT	EMPTY												TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNITS
29.91	62.5	75.0	F 270

	DYNO	ACTUAL	INDICATED	DYNO	TIRE	NOX	RELATIVE	
TEST DATE	HR.	SETTING	DYNO H.P.	H.P.	ODOM.	PRESSURE	FACTOR	HUMIDITY
10-24-79	12	0207	2750	7.4	10348.0	45.00	0.9611	49.7

BAG 1	3.593 MILES	5.782 KM	8377. ROLL REVS.	VMIX= 2797.0 CU.FT.	DILUTION FACTOR = 11.442			
SITE #A215	EXHAUST SAMPLE		HACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.
HC-FID	16	30.2	90.73	16	1.2	3.60	87.44 PPM	3.99
NOX-CHEM	16	26.5	27.54	16	0.0	0.0	27.54 PPM	4.01
CO2	23	44.1	1.040	23	2.1	0.044	1.040 %	1506.49
CO	20	39.2	422.22	20	0.3	5.74	816.98 PPM	75.34
								419.303
								260.543
								13.030
								19.5
								8.27
								12.1

BAG 2	3.840 MILES	6.140 KM	8950. ROLL REVS.	VMIX= 4746.0 CU.FT.	DILUTION FACTOR = 19.101			
SITE #A215	EXHAUST SAMPLE		HACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.
HC-FID	14	10.6	7.81	14	5.0	3.68	4.33 PPM	0.33
NOX-CHEM	15	11.8	5.98	15	0.1	0.05	5.93 PPM	1.47
CO2	23	30.0	0.696	23	2.0	0.042	0.657 %	1614.63
CO	17	17.9	43.47	17	0.0	0.0	43.47 PPM	6.80
								420.489
								261.280
								20.9
								8.90
								11.2

BAG 3	3.601 MILES	5.795 KM	8395. ROLL REVS.	VMIX= 2787.0 CU.FT.	DILUTION FACTOR = 13.096			
SITE #A215	EXHAUST SAMPLE		HACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.
HC-FID	14	22.4	16.58	14	5.1	3.75	13.11 PPM	0.60
NOX-CHEM	15	31.4	16.05	15	0.2	0.10	15.96 PPM	2.31
CO2	23	41.4	1.015	23	2.0	0.042	0.976 %	1408.98
CO	17	28.8	70.29	17	0.0	0.0	70.29 PPM	6.46
								391.322
								243.156
								22.5
								9.55
								10.5

WEIGHTED VALUES	HC	CO	CO2	NOX		MPG	KPL	L/100KM
GRAMS/MILE	0.32	5.4	412.	0.61	WEIGHTED VALUES	21.0	8.9	11.2
BEFORE ROUNDING	0.3218	5.767	412.19	0.6062		21.0080	8.9327	11.1947
GRAMS/KM	0.200	3.58	256.	0.38	72-74 FTP	20.2	8.6	11.6
BEFORE ROUNDING	0.19999	3.5840	256.12	0.3767		20.2042	8.5897	11.6417
					UNWEIGHTED FTP	20.9	8.9	11.3
						20.8946	8.8832	11.2571

FE20
 COMMENTS: PASSMASTER ~~FOR~~ TESTING. UNAUTHORIZED KICKDOWN ON BAG 1 START. BASELINE
 FIRST 4 SECONDS OF BAG 3 RAN WITH AMBIENT PUMPS OFF ON CVS
 BAG 2 30 MIN OLD

MFR. CODE	VEHICLE I.D.	VER- SION	EVAP INIT.	MFR. REP. CHG.	REF. TEST CODE	ACHP	ALT. H.P. METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFIG.	OVER-DRIVE CODE	TEST TYPE
30	EXXON	0						2750	9.9			EXPERIMENTAL
TEST PROCEDURE -----/ HWFE												

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	/--- IGNITION TIMING ---/			/----- % CO -----/			IDLE RPM	SOAK PERIOD	MEASURED COASTDOWN TIME	
					#1	#2	RPM	GEAR	LEFT	RIGHT	COMB			

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
MMG	INCH	INCH	UNITS
28.91	64.0	60.0	F 27C

TEST DATE	HR.	DYNO SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DYU H.P.	ODOM.	TIME PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
10-24-79	14	0207	2750	7.4		10369.0	45.00	0.9563	41.4	

BAG 1	10.212 MILES	16.434 KM	23409. PULL REVS.	VMIX= 4031.0 CU.FT.	DILUTION FACTOR = 8.245	MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE	
SITE #A215	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM		
HC-FID	14	7.7	5.66	14	4.3	3.16	2.89 PPM	0.19	0.019	0.012		
NOX-CHEM	15	46.3	23.32	15	0.1	0.05	23.27 PPM	4.86	0.476	0.296	MPG	KPL
CO2	23	61.4	1.620	23	1.9	0.040	1.545 %	3311.09	324.249	201.479	27.3	11.59
CO	17	17.7	42.48	17	0.0	0.0	42.98 PPM	5.71	0.559	0.348		L/100KM

WEIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.02	0.6	324.24	0.4758	27.3	11.6	8.6
BEFORE ROUNDING	0.0146	0.559	324.24	0.4758	27.2860	11.6212	8.6048
GRAMS/KM	0.012	0.35	201.47	0.30	72-74 FTP	27.3	11.6
BEFORE ROUNDING	0.01157	0.3475	201.47	0.2956	27.2834	11.5993	8.6211
					UNWEIGHTED FTP	27.3	11.6
						27.2834	11.5993

COMMENTS: PASSMASTER FORD TESTING
BASELINE

FD.	VEHICLE I.D.	VEH- SION	EXP	W.P.	REQ.	TEST	AL.	EQUIVALEN	ACTUAL	OVEN-
NO				W.P.	CRG.	CODE	W.P.	TEST	GYNO	DRIVE
				Init.		COMP	2E	4E	HP.	CONF.
30	EXXON	0					2/50		9.9	

PREP DATE	CURB WEIGHT	DWIVE ALE WEIGHT	GAGE EMPLY	ALE MEASURE	/--- IGNITION TIMING ---/				/----- & CO -----/			IDLE	SOAK	MEASURED	
					#1	#2	RPM	GEAR	LEFT	RIGHT	COMB	RPM	GEAR	PERIOD	COASTDOWN TIME

1- AMBIENT TEST CONDITIONS - 1

RAW	WET	DRY	CVS
WNG	BULB	BULB	UNIT
29.08	63.6	14.2	270

TEST DATE	HR.	SYNO SITE	ACTUAL DEFECTS SETTING	INDICATED DEFECTS	DVO H.P.	COOL.	TIME PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
10-25-79	09	0207	2750	1.4		10397.0	45.00	0.9884	56.0	

BAG 1 3.560 MILES 5.730 PM 8301. WOLL WEVS.			VMEK = 21750 CU.FT.			DILUTION FACTOR = 11.828							
SITE #A215 EXHAUST SAMPLE			BACKGROUND SAMPLE			CORRECTED			MASS EMISSIONS				
	RANGE	YIELD	CONC.	RANGE	YIELD	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FID	16	23.5	70.54	16	1.3	3.00	57.02 PPM	3.06	0.860	0.534			
NOX-CHEM	16	28.8	28.66	16	0.2	0.20	28.47 PPM	4.26	1.197	0.744	MPG	KPL	L/100KM
CO2	23	43.7	1.058	23	2.1	0.044	1.020 %	1489.22	418.289	254.913	20.0	8.49	11.8
CO	20	28.2	574.54	20	0.5	0.50	565.77 PPM	52.15	14.649	9.103			

SITE NAME		EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED CONCENTRATIONS		MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE
		RANGE	METER	CONC.	RANGE	METER	CONC.	GMS.	GMS/MI	GMS/KM			
BAG 2 7.420 MILES 6.148 KM 8967. ROLL REVS. VMAX= 4761.0 CU.FT. DILUTION FACTOR = 19.244													
HC-FID	14	16.0	7.36	14	4.3	3.69	3.45 PPM	0.31	0.080	0.050			
COX-CHEM	14	35.8	7.07	14	0.4	0.10	8.97 PPM	2.29	0.599	0.372	MPG	KPL	L/100KM
CO2	23	29.8	0.691	23	1.9	0.040	0.653	1611.90	421.944	262.184	20.9	8.89	11.2
CO	17	12.0	24.05	17	0.0	0.0	24.05 PPM	4.56	1.194	0.742			

HAG 3 3.562 MILES 5.132 PM 8304. ROLL 4EVS. V-IX= 2780.0 CU.FT. DILUTION FACTOR = 13.566		EXHAUST SAMPLE			BACKGROUND SAMPLE			MASS EMISSIONS			AUX.		
SITE	RANGE	VELOC	CONC.	RANGE	VELOC	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1	FIELD2	CODE
HC-FID	14	23.7	17.55	14	5.0	3.68	14.14 PPM	0.64	0.181	0.112			
NOX-CHEM	14	51.7	13.05	14	0.3	0.08	12.98 PPM	1.94	0.544	0.338	MPG	KPL	L/100KM
CO2	23	40.4	0.975	23	2.0	0.042	0.936 %	1352.71	379.811	236.003	23.1	9.80	10.2
CO	17	43.5	100.82	17	0.0	0.0	100.82 PPM	9.82	2.757	1.713			

WEIGHTED VALUES	HC	CO	CO2	NOx	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.27	4.4	410.	0.71		21.2	9.0	11.1
BEFORE ROUNDING	0.2546	4.414	414.59	0.7077		21.2272	9.0160	11.0913
GRAMS/KM	0.168	2.74	255.	0.44	72-74 FTP	20.5	8.7	11.5
BEFORE ROUNDING	0.16753	2.7432	254.51	0.4397		20.4569	8.6971	11.4980
					UNWEIGHTED FTP	21.2	9.0	11.1
						21.2377	9.0291	11.0752

COMMENTS:

PASSMASTER FEPD TESTING, A/C OFF, 11.5 MIN SOAK, MAG 2 30 MIN OLU

MFR.	VER-	MFR.	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE
CODE	SION	REP. RUN. RETEST	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
30	EVAP	INIT. CHG. CODE	METH.	WEIGHT	H.P.	CODE	TEST PROCEDURE
EXXON	0	ACHP		2750	9.9		HWFE

PREP DATE	CURB	DRIVE	AXLE	AXLE	IGNITION	TIMING	% CO	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	GAUGE	MEASURE	#1	#2	LEFT	RPM	GEAR	COASTDOWN
			EMPTY				RIGHT		PERIOD	TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNIT
29.08	64.2	77.7	27C

TEST DATE	DYNO	ACTUAL	INDICATED	DVU	TIRE	NOX	RELATIVE	ALDEHYDES
10-25-79	HR. SITE	INERTIA	DYNO H.P.	H.P.	ODOM.	FACTOR	HUMIDITY	
11	0207	SETTING	7.4		10418.0	0.9751	47.9	

BAG 1	10.203	MILES	16.421	KM	23790.	ROLL REVS.	VMIX=	4026.0	CU.FT.	DILUTION FACTOR =	7.601
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX. AUX. AUX.		
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1 FIELD2 CODE
HC-FID	14	8.7	6.40	14	4.6	3.38	3.47 PPM	0.23	0.022	0.014	
NOX-CHEM	15	68.3	34.52	15	0.2	0.10	34.43 PPM	7.32	0.718	0.446	
CO2	23	65.9	1.756	23	2.2	0.046	1.716 %	3578.88	350.753	217.948	MPG KPL L/100KM
CO	17	26.6	64.86	17	0.0	0.0	64.86 PPM	8.61	0.844	0.524	25.2 10.71 9.3

WEIGHTED VALUES	HC	CO	CO2	NOX
GRAMS/MILE	0.02	0.8	351.	0.72
BEFORE ROUNDING	0.0223	0.843	350.75	0.7175
GRAMS/KM	0.014	0.52	218.	0.45
BEFORE ROUNDING	0.01388	0.5242	217.94	0.4458

WEIGHTED VALUES	MPG	KPL	L/100KM
	25.2	10.7	9.3
	25.1706	10.7040	9.3422
72-74 FTP	25.2	10.7	9.3
	25.1945	10.7112	9.3359
UNWEIGHTED FTP	25.2	10.7	9.3
	25.1945	10.7112	9.3359

COMMENTS: PASSMASTER FEHD TESTING
A/C ON. NO DEVICE

MFR. CODE	VEHICLE I.D.	VER- SION	EVAP	REF. REP. INIT.	RETEST CHG. CODE	ACHP	ALT. H.P. METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFIG.	OVER- DRIVE CODE	/----- TEST TYPE -----/ EXPERIMENTAL /----- TEST PROCEDURE -----/ 2 BAG LA-4
30	EXXON	0						2750	9.9			

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	/--- IGNITION TIMING ---/	/----- % CO -----/	IDLE RPM	SOAK PERIOD	MEASURED COASTDOWN TIME
					#1 #2 RPM GEAR	LEFT RIGHT COMB			

/- AMBIENT TEST CONDITIONS - /

BARO	WFT	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
29.28	61.6	74.8	F 27C

TEST DATE	DYNO SITE	ACTUAL INERTIA	INDICATED DYNO H.P.	DVO H.P.	ODOM.	TIME PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
10-26-79	0A D207	2750	7.4		10445.0	45.00	0.9399	46.9	

BAG 1	3.566 MILES	5.739 KM	8314. ROLL REVS.	VMIX= 2660.0 CU.FT.	DILUTION FACTOR = 10.574				
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX. FIELD1
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI
HC-FID	15	48.7	73.18	15	2.3	3.42	70.09 PPM	3.27	0.918
NOX-CHEM	15	85.7	43.35	15	0.1	0.05	43.31 PPM	6.31	1.768
CO2	23	47.4	1.175	23	2.2	0.046	1.134 %	1679.69	471.050
CO	19	86.0	845.28	19	0.0	0.0	845.28 PPM	79.71	22.352

BAG 2	3.841 MILES	6.181 KM	8955. ROLL REVS.	VMIX= 4760.0 CU.FT.	DILUTION FACTOR = 17.075				
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX. FIELD1
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI
HC-FID	14	10.4	7.66	14	4.8	3.53	4.34 PPM	0.34	0.088
NOX-CHEM	14	51.2	12.92	14	0.3	0.08	12.85 PPM	3.11	0.811
CO2	23	33.2	0.780	23	2.2	0.046	0.737 %	1816.35	472.914
CO	17	16.6	40.29	17	0.0	0.0	40.29 PPM	6.32	1.646

WEIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.49	11.6	472.	1.27	18.0	7.7	13.0
BEFORE ROUNDING	0.4874	11.615	472.01	1.2716	18.0326	7.6733	13.0321
GRAMS/KM	0.303	7.22	293.	0.79	72-74 FTP	7.7	13.0
BEFORE ROUNDING	0.30290	7.2172	293.29	0.7901	18.0399	7.6695	13.0385
					UNWEIGHTED FTP	7.7	13.0
					18.0398	7.6695	13.0385

COMMENTS: PASSMASTER FEPD TESTING. A/C ON. DEVICE OFF. COLD START
BAG 1-2 CHANGE 5 SECONDS LATE
BAG 2 30 MIN. OLD

MFR. CODE	VEHICLE I.D.	VER- SION	EVAP	MFR. REP. INIT.	RUN. CHG.	RETEST CODE	ACHP	ALT. H.P. METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFIG.	OVER- DRIVE CODE	/----- TEST TYPE -----/ EXPERIMENTAL /----- TEST PROCEDURE -----/ HWFE.
30	EXXON	0							2750	9.9			

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	/--- IGNITION TIMING ---/ #1 #2	KPM	GEAR	/----- % CO -----/ LEFT RIGHT	COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	-------------	-------------------	-------------	--------------	------------------------------------	-----	------	----------------------------------	------	----------	------	-------------	-------------------------

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
29.30	65.1	79.8 F	27C

TEST DATE	HR.	DYNO SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DVU H.P.	ODOM.	TIME PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
10-26-79	10	D207	2750	7.4		10466.0	45.00	0.9761	45.2	

BAG 1	10.218 MILES	16.444 KM	23823. ROLL REVS.	VMIX= 4070.0 CU.FT.	DILUTION FACTOR = 7.718								
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM			
HC-FID	14	8.3	6.11	14	4.7	3.45	3.10 PPM	0.21	0.020	0.013			
NOX-CHEM	15	58.0	29.33	15	0.1	0.05	29.29 PPM	6.30	0.617	0.383	MPG	KPL	L/100KM
CO2	23	65.1	1.729	23	2.1	0.044	1.691 %	3565.28	348.937	216.819	25.3	10.76	9.3
CO	17	26.5	64.61	17	0.0	0.0	64.61 PPM	8.67	0.849	0.527			

EIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.02	0.8	349.	0.62	25.3	10.8	9.3
BEFORE ROUNDING	0.0201	0.848	348.93	0.6167	25.3143	10.7526	9.3000
GRAMS/KM	0.013	0.53	217.	0.38	25.3	10.8	9.3
BEFORE ROUNDING	0.01253	0.5272	216.81	0.3832	25.3251	10.7668	9.2878
					UNWEIGHTED FTP	25.3	10.8
						25.3251	10.7668

COMMENTS: PASSMASTER FORD TESTING, A/C ON, DEVICE ON

MFR. VEHICLE I.D. VEH. SIGN EVAP I-IT. CHG. CODE ACHP MFR. EQUIVALENT TEST WEIGHT H.P. TRANS. OVER-DRIVE CODE /----- TEST TYPE -----/ EXPERIMENTAL /----- TEST PROCEDURE -----/ CVS 75-LATER

PREP DATE CUPH WEIGHT DRIVE AXLE WEIGHT GAUGE MEASURE /--- IGNITION TIMING ---/ /----- % CO -----/ IDLE RPM GEAR SOAK PERIOD MEASURED COASTDOWN TIME

/- AMBIENT TEST CONDITIONS - /

BARO WFT DRY LVS
"HG BULK BULK UNITS UNIT
29.14 64.5 75.7 F 27.0

TEST DATE HW SITE ACTUAL DYNMO INDICATED DYNMO TIME NOX RELATIVE ALDEHYDES
10-31-79 10 0207 SETTING DYNMO H.P. 000% PRESSURE HUMIDITY
2750 7.4 10555.8 45.00 0.995H 54.6

BAG 1 3.557 MILES 5.724 KM 8293. ROLL REVS. VMIX= 2793.0 CU.FT. DILUTION FACTOR = 10.237
SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/M1 GMS/KM FIELD1 FIELD2 CODE
HC-FID 15 38.1 57.18 15 4.7 7.00 50.47 PPM 2.32 0.652 0.405
NOX-CHEM 15 100.3 50.85 15 0.4 0.21 50.67 PPM 7.63 2.146 1.333
CO2 23 49.7 1.243 23 2.2 0.045 1.202 % 1739.93 488.900 303.789 MPG KPL L/100KM
CO 20 29.3 595.62 20 0.5 11.49 588.25 PPM 54.17 15.230 9.463

BAG 2 3.832 MILES 6.147 KM 8434. ROLL REVS. VMIX= 4727.0 CU.FT. DILUTION FACTOR = 16.983
SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/M1 GMS/KM FIELD1 FIELD2 CODE
HC-FID 14 11.4 5.49 14 0.7 4.93 3.76 PPM 0.29 0.076 0.047
NOX-CHEM 14 66.5 16.72 14 0.7 0.18 16.55 PPM 4.22 1.101 0.684
CO2 23 33.5 0.743 23 2.1 0.044 0.743 % 1828.10 477.093 296.452 MPG KPL L/100KM
CO 17 1.9 2.91 17 0.2 0.48 1.95 PPM 0.31 0.080 0.049

BAG 3 3.547 MILES 5.700 KM 8270. ROLL REVS. VMIX= 2790.0 CU.FT. DILUTION FACTOR = 12.107
SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/M1 GMS/KM FIELD1 FIELD2 CODE
HC-FID 14 22.6 18.73 14 0.3 4.63 12.48 PPM 0.57 0.160 0.100
NOX-CHEM 15 62.7 31.70 15 0.3 0.15 31.56 PPM 4.75 1.339 0.832
CO2 23 44.0 1.100 23 2.0 0.042 1.061 % 1534.25 432.553 268.776 MPG KPL L/100KM
CO 17 21.7 52.79 17 0.0 0.0 52.79 PPM 4.86 1.369 0.851

WEIGHTED VALUES HC CO CO2 NOX WEIGHTED VALUES MPG KPL L/100KM
GRAMS/MILE 0.22 3.6 467. 1.34 18.7 8.0 12.5
BEFORE ROUNDING 0.2142 3.564 467.33 1.3425 18.7346 7.9705 12.5461
GRAMS/KM 0.134 2.22 299. 0.85 17.9 7.6 13.1
BEFORE ROUNDING 0.13552 2.2176 299.38 0.8540 17.9062 7.6127 13.1358
UNWEIGHTED FTP 18.6 7.9 12.6
18.6417 7.9254 12.6175

COMMENTS: PASSMASTER FEND TESTING

A/C ON, DEVICE ON CAR ENGINE WAS SHUT OFF AFTER HOT SOAK WAS PUSHED

MFR. VEH. VEH. ACT. EQUIVALENT ACTUAL OVER- /----- TEST TYPE -----/
 ONE VEHICLE I.D. SIGN FVAP INIT. CNO. CODE ACHP H.P. TEST DYNQ TRANS. DRIVE EXPERIMENTAL
 30 EXXON 0 2750 9.9 CODE HWFE /----- TEST PROCEDURE -----/

PREP DATE CURR WGT AXLE WGT AXLE WGT /--- IGNITION TIMING ---/ /----- * CO -----/ IDLE MEASURED
 WEIGHT WEIGHT GAUGE MEASURE #1 #2 RPM GEAR LEFT RIGHT COMB RPM GEAR SOAK COASTDOWN
 TIME

/- AMBIENT TEST CONDITIONS - /

HARD WET DRY CWS
 HWS BULB BULB UNITS UNIT
 29.14 65.6 77.5 F 27C

ACTUAL
 TEST DATE HP. SITE DYNQ INERTIA INDICATED DYNQ TIME NOX RELATIVE
 10-31-79 10 D207 2750 7.4 10076.0 45.00 1.0081 53.2 ALDEHYDES

BAG 1 10.187 MILES 16.395 IN 23752. POLL. MEVS. VMIX 3974.0 CO.FT. DILUTION FACTOR = 7.426
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM FIELD1 FIELD2 CODE
 HC-FID 14 19.2 7.51 14 5.5 4.04 4.01 PPM 0.26 0.026 0.016
 NOX-CHEM 14 71.3 79.46 14 0.2 0.20 70.24 PPM 15.27 1.498 0.931
 CO2 23 47.3 1.413 23 2.0 0.042 1.757 % 3641.27 357.439 222.102
 CO 17 3.9 7.23 17 0.0 0.0 7.23 PPM 0.95 0.093 0.058
 EIGHTED VALUES HC CO CO2 NOX
 GRAMS/MILE 0.03 0.1 357. 1.50
 BEFORE ROUNDING 0.0255 0.093 357.43 1.4944
 GRAMS/KM 0.016 0.0578 222.10 0.9311
 BEFORE ROUNDING 0.01590 0.0578 222.10 0.9311
 WEIGHTED VALUES MPG KPL L/100KM
 24.8 10.5 9.5
 24.8231 10.5458 9.4823
 72-74 FTP 24.8 10.5 9.5
 24.8059 10.5460 9.4821
 UNWEIGHTED FTP 24.8 10.5 9.5
 24.8059 10.5460 9.4821

COMMENTS: PASSMASTER FERM TESTING. A/C ON - DEVICE ON
 CO RANGE 17 SPAN POT OUT SPANNED 2.5 LON

11 of 53

MFR. CODE	VEHICLE I.D.	VER- SION	EVAP	MFR. REP. INIT.	RUN. CHG.	RETEST CODE	ACHP	ALT. H.P. METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFIG.	OVER- DRIVE CODE	/----- TEST TYPE -----/
30	EXXON	0							2750	9			EXPERIMENTAL
/----- TEST PROCEDURE -----/													
2 BAG LA-4													

PHWP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	/--- IGNITION TIMING ---/	#1	#2	RPM	GEAR	/----- % CO -----/	LEFT	RIGHT	COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	-------------	-------------------	-------------	--------------	---------------------------	----	----	-----	------	--------------------	------	-------	------	----------	------	-------------	-------------------------

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
29.12	59.0	74.0 D	20C

TEST DATE	HR.	DYNO SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DVU H.P.	ODOM.	TIRE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
10-29-79	16	D220	2750	9.9		10553.0	45.00	1.0071	59.5	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2822.0 CU.FT.					DILUTION FACTOR = 12.367						
SITE #A216	EXHAUST SAMPLE		BACKGROUND		SAMPLE		CORRECTED		MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM				
HC-FID	14	22.8	16.88	14	5.8	4.27	12.95 PPM	0.60	0.166	0.103				
NOX-CHEM	15	55.9	28.15	15	0.0	0.0	28.15 PPM	4.33	1.207	0.750	MPG	KPL	L/100KM	
CO2	23	50.3	1.079	23	2.3	0.042	1.040 %	1520.88	423.643	263.240	20.8	8.86	11.3	
CO	17	11.8	28.63	17	0.0	0.0	28.63 PPM	2.66	0.742	0.461				

BAG 2	3.910 MILES	6.293 KM	VMIX= 4691.0 CU.FT.					DILUTION FACTOR = 18.167						
ITE #A216	EXHAUST SAMPLE		BACKGROUND		SAMPLE		CORRECTED		MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM				
HC-FID	14	14.0	10.34	14	6.0	4.42	6.16 PPM	0.47	0.121	0.075				
NOX-CHEM	15	30.5	15.42	15	0.0	0.0	15.42 PPM	3.95	1.009	0.627	MPG	KPL	L/100KM	
CO2	23	36.0	0.736	23	1.8	0.033	0.705 %	1713.44	438.219	272.296	20.2	8.59	11.6	
CO	17	1.7	4.09	17	0.0	0.0	4.09 PPM	0.63	0.162	0.101				

WEIGHTED VALUES	HC	CO	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.14	0.4	431.	1.10	20.5	8.7	11.5	
BEFORE ROUNDING	0.1424	0.439	431.24	1.1038	20.5246	8.7184	11.4698	
GRAMS/KM	0.089	0.27	268.	0.69	72-74 FTP	20.5	8.7	11.5
BEFORE ROUNDING	0.08853	0.2731	267.96	0.6858	20.5193	8.7236	11.4630	
					UNWEIGHTED FTP	20.5	8.7	11.5
					20.5193	8.7236	11.4630	

COMMENTS: PASSMASTER PERD TESTING
 DEVICE ON A/C ON, WINDOWS OPEN
 T= 75 DEG. F

MFR.		ALT.	EQUIVALENT	ACTUAL	OVER-	/----- TEST TYPE -----/
VEHICLE I.D.	VER-	REP. RUN. PETEST	H.P.	TEST DYNQ	DRIVE	EXPERIMENTAL
JO EXXON	SIGN EVAP INIT. CHG. CODE ACHP	METH.	WEIGHT	H.P.	CONFG.	/----- TEST PROCEDURE -----/
	0		2750	9.9	CODE	2 BAG LA-4

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	/--- IGNITION TIMING ---/				/----- % CO -----/			IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME
					#1	#2	RPM	GEAR	LEFT	RIGHT	COMB				

1- AMBIENT TEST CONDITIONS - 1

BARID	WET	DRY	CVS
"H/	HULB	HULM UNITS	UNIT
29.12	59.0	14.0 D	200

TEST DATE	HR.	DAY	MONTH	YEAR	INERTIA	INDICATED	DVU	TIME	NOX	RELATIVE	ALDEHYDES
					SETTING	DYNO H.P.	H.P.	PRESSURE	FACTOR	HUMIDITY	
10-29-79	16	0220			2750	4.9	10547.0	45.00	1.0071	59.5	

BAG 1 3.590 MILES 5.778 CM		VOLUME = 2623.0 CU.FT.		DILUTION FACTOR = 12.123									
SITE #A216 EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED			MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM			
HC-FID	14	29.0	21.50	14	5.3	3.70	17.42 PP4	0.79	0.219	0.136			
NOX-CHEM	15	59.9	30.15	15	0.0	0.0	30.15 PPM	4.41	1.229	0.764	MPG	KPL	L/100KM
CO2	23	51.0	1.047	23	2.0	0.037	1.063 *	1477.60	411.588	255.749	21.4	9.09	11.0
CO	17	27.0	66.19	17	0.0	0.0	66.19 PPM	5.85	1.631	1.013			

JAG 2 3.910 MILES 6.293 AM			VMIX = 4704.0 CU.FT.			DILUTION FACTOR = 17.895							
SITE #A216 FANAUST SAMPLE			BACKGROUND SAMPLE			CORRECTED			MASS EMISSIONS				
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FID	14	13.0	9.60	14	5.6	4.13	5.70 PPM	0.44	0.112	0.070			
NOX-CHEM	15	32.0	16.50	15	0.0	0.0	16.50 PPM	4.25	1.088	0.676	MPG	KPL	L/100KM
CO2	23	36.5	0.748	23	1.6	0.029	0.720 *	1754.66	448.762	278.848	19.7	8.39	11.9
CO	17	1.0	2.41	17	0.0	0.0	2.41 PPM	0.37	0.095	0.059			

WEIGHTED VALUES	HC	CO	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILF	0.16	0.8	431.	1.16	20.5	8.7	11.5	
BEFORE ROUNDING	0.1630	0.830	430.96	1.1553	20.4918	8.7045	11.4882	
GRAMS/KM	0.101	0.52	264.	0.72	20.5	8.7	11.5	
BEFORE ROUNDING	0.10132	0.5160	267.79	0.7179	20.5001	8.7154	11.4738	
					UNWEIGHTED FTP	20.5	8.7	11.5
						20.5001	8.7154	11.4738

COMMENTS: PASSMASTER FEMO TESTING
LONG SOAK 15 MIN
DEVICE OFF A/C ON MAX/HIGH WINDOWS OPEN T= 75 DEG. F

MPR.	VEHICLE I.D.	VEH- SION	EVAP	MPH. REP.	MULT. INIT.	WEI TEST CHG.	CODE	ACHP	ALT. H.P.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFG.	OVER- DRIVE CODE	/----- TEST TYPE -----/ EXPERIMENTAL /----- TEST PROCEDURE -----/ 2 BAG LA-4
30	EXXON	0								2750	9.9			

PREP DATE	CURR WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE. MEASURE	/--- IGNITION TIMING ---/ #1 #2 RPM GEAR	/----- % CO -----/ LEFT RIGHT COMB	IDLE RPM	SOAK GEAR PERIOD	MEASURED COASTDOWN TIME
-----------	----------------	-------------------------	----------------	------------------	---	---------------------------------------	-------------	---------------------	-------------------------------

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
29.13	59.0	75.0	0
			200

TEST DATE	MM.	DD	TIME	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
10-29-79	15	0220	45.00	1.0069	57.5	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2824.0 CU.FT.	DILUTION FACTOR = 11.846								
SITE #A216	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE					
HC-FID	RANGE 14	METER 29.0	CONC. 21.50	14 5.3	3.90	17.92 PPM	0.83	0.230	0.143			
NOX-CHEM	15	61.0	30.70	15 0.0	0.0	30.70 PPM	4.73	1.317	0.818			
CO2	23	51.9	1.119	23 1.7	0.031	1.041 %	1596.05	444.582	276.250	MPG	KPL	L/100KM
CO	17	39.0	96.24	17 0.0	0.0	96.24 PPM	8.96	2.496	1.551	19.7	8.39	11.9

BAG 2	3.910 MILES	6.293 KM	VMIX= 4668.0 CU.FT.	DILUTION FACTOR = 17.407								
SITE #A216	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE					
HC-FID	RANGE 14	METER 13.1	CONC. 9.67	14 5.2	3.83	6.06 PPM	0.46	0.118	0.073			
NOX-CHEM	15	31.5	15.43	15 0.0	0.0	15.93 PPM	4.05	1.037	0.644	MPG	KPL	L/100KM
CO2	23	37.4	0.758	23 2.2	0.040	0.730 %	1766.26	451.729	280.691	19.6	8.33	12.0
CO	17	2.1	5.06	17 0.1	0.24	4.81 PPM	0.74	0.190	0.118			

WEIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.17	1.3	448.	1.17	19.7	8.3	12.0
BEFORE ROUNDING	0.1718	1.293	448.30	1.1709	19.6815	8.3490	11.9774
GRAMS/KM	0.107	0.80	279.	0.73	19.7	8.4	12.0
BEFORE ROUNDING	0.10675	0.8039	278.56	0.7276	19.6773	8.3657	11.9535
					UNWEIGHTED FTP	19.7	8.4
						19.6773	8.3657

COMMENTS: PASSMASTER FEND TESTING
DEVICE OFF A/C ON WINDOWS OPEN
T= 75 DEG. F

MFR.	VEHICLE I.D.	VER-	MFR.	REP. RUN. RETEST	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE -----/
DOE	30 EXA04	SION EVAP	INIT. CHG.	CODE ACHP	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
		0			METH.	W.FIGHT	H.P.	CODE	TEST PROCEDURE -----/
						2750	9.9		2' BAG LA-4

PREP DATE	CHPB	DRIVE	AXLE	IGNITION	TIMING	% CO	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	MEASURE	#1	#2	LEFT	RPM	PERIOD	COASTDOWN
						RIGHT			TIME
						COMB			

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DPY	CVS
"HG	BULB	BULB	UNIT
29.12	54.0	74.0	20C

TEST DATE	DYNO	ACTUAL	INDICATED	DYNO	TIME	NOX	RELATIVE	
10-29-79	14	SETTING	DYNO	H.P.	ODOM.	FACTOR	HUMIDITY	ALDEHYDES
	14	2/50		9.9	10518.7	1.0071	59.5	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2767.0 CU.FT.	DILUTION FACTOR = 13.582				
SITE #A216	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.
HC-FID	14	22.3	16.50	14	5.5	4.05	12.75 PPM	0.58
NOX-CHEM	15	51.0	25.69	15	0.0	0.0	25.69 PPM	3.88
CO2	23	46.3	0.960	23	2.0	0.037	0.945 %	1356.09
CO	17	20.5	50.05	17	0.0	0.0	50.05 PPM	4.57
								0.160
								0.100
								0.671
								234.718
								0.790
								23.3
								9.92
								10.1

BAG 2	3.910 MILES	6.293 KM	VMIX= 4737.0 CU.FT.	DILUTION FACTOR = 19.889				
SITE #A216	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.
HC-FID	14	12.4	9.15	14	5.6	4.13	5.23 PPM	0.40
NOX-CHEM	15	23.0	11.65	15	0.1	0.05	11.61 PPM	3.00
CO2	23	33.2	0.673	23	2.7	0.050	0.626 %	1535.21
CO	17	0.7	1.68	17	0.0	0.0	1.68 PPM	0.26
								0.104
								0.064
								0.477
								243.974
								0.042
								22.6
								9.59
								10.4

WEIGHTED VALUES	HC	CO	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.13	0.6	365.50	0.92		22.9	9.7	10.3
BEFORE ROUNDING	0.1308	0.643	365.50	0.9168		22.8940	9.7254	10.2823
GRAMS/KM	0.081	0.40	240.	0.57		22.9	9.7	10.3
BEFORE ROUNDING	0.08127	0.4000	239.54	0.5696		22.9296	9.7483	10.2581
						22.9	9.7	10.3
						22.9296	9.7483	10.2581

COMMENTS: PASSMASTER FERO TESTING, A/C OFF, DEVICE OFF, HOT START T=75 DEG. F

MFV. CODE	VEHICLE	1.0.	VEH- SIGN	REP. EVAP	MFV. INIT.	RETEST CHG.	ALT. H.P.	EQUIVALENT TEST	ACTUAL DYNO	TRANS. CONF.	OVER- DRIVE	TEST TYPE -----/ EXPERIMENTAL TEST PROCEDURE -----/ 2 BAG LA-4
30	EXXON		0					2750	9.9			

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION #1	TIMING #2	% CO LEFT	% CO RIGHT	% CO COMB	IDLE RPM	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	----------------	-------------------------	----------------	-----------------	----------------	--------------	--------------	---------------	--------------	-------------	----------------	-------------------------------

/- AMBIENT TEST CONDITIONS - /

HARD	WET	DRY	CVS
WPS	HULM	HULB	UNITS
29.12	59.0	74.0	0

TEST DATE	DYNO HP.	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DVO H.P.	TIME ODOM.	NOX PRESSURE	RELATIVE FACTORY	ALDEHYDES HUMIDITY
10-24-79	14	0220	2750	9.9	10531.0	45.00	1.0071	59.5

BAG 1	3.540 MILES	5.778 KM	VMIX= 2720.0 CU.FT.	DILUTION FACTOR = 13.275			
SITE #A215	EXHAUST SAMPLE	HACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FTD	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS
14	49.3	30.72	14	5.0	4.13	32.91 PPM	1.46
NOX-CHEM	15	52.7	20.65	15	0.3	0.15	26.50 PPM
CO2	23	47.0	0.997	23	2.0	0.037	0.963 %
CO	17	35.3	80.95	17	0.0	0.0	86.95 PPM
							1357.33
							378.085
							234.931
							7.80
							2.172
							1.350
							MPG
							KPL
							L/100KM
							23.2
							9.85
							10.2

BAG 2	3.910 MILES	6.263 KM	VMIX= 4672.0 CU.FT.	DILUTION FACTOR = 19.493			
SITE #A215	EXHAUST SAMPLE	HACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FTD	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS
14	13.0	9.60	14	5.9	4.35	5.47 PPM	0.42
NOX-CHEM	15	23.5	11.91	15	0.0	0.0	11.91 PPM
CO2	23	33.8	0.666	23	2.0	0.037	0.651 %
CO	17	1.3	3.13	17	0.0	0.0	3.13 PPM
							1576.70
							403.247
							250.566
							0.48
							0.123
							0.077
							MPG
							KPL
							L/100KM
							22.0
							9.34
							10.7

WEIGHTED VALUES	HC	CO	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.25	1.1	391.	0.73	22.5	9.6	10.4	
BEFORE ROUNDING	0.2505	1.103	391.20	0.9287	22.5353	9.5785	10.4399	
GRAMS/KM	0.156	0.69	243.	0.58	72-74 FTP	22.5	9.6	10.4
BEFORE ROUNDING	0.15569	0.6859	243.08	0.5771	22.5337	9.5800	10.4383	
					UNWEIGHTED FTP	22.5	9.6	10.4
					22.5337	9.5800	10.4383	

COMMENTS: PASSMASTER FEMO TESTING. A/C OFF. DEVICE OFF. HOT START T= 75 DEG. F
LONG SOAK 22 MPN. BEFORE TEST

16 of 53

MFR. CODE	VEHICLE I.D.	VEH- SIGN EVAP	MFR. WEP. INIT.	RUN. CHG.	TEST CODE	ACHP	ALT. H.P.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONF.	OVER- DRIVE CODE	TEST TYPE EXPERIMENTAL
30	EXX0V	0						2750	9.9			TEST PROCEDURE 2 BAG LA-4

PREP DATE	CURR WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION TIMING #1 #2	% CO LEFT RIGHT	IDLE RPM	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	----------------	-------------------------	----------------	-----------------	--------------------------	--------------------	-------------	----------------	-------------------------------

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNIT
29.13	59.0	75.0	20C

TEST DATE	DYNO HP.	SITE	ACTUAL SETTING	INDICATED DYNO H.P.	DVO H.P.	TIME ODOM.	PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
10-29-79	15	0220	2750	9.9		10536.0	45.00	1.0069	57.5	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2750.0 CU.FT.	DILUTION FACTOR = 11.818	AUX. FIELD1	AUX. FIELD2	AUX. CODE
SITE #A216	EXHAUST SAMPLE		CORRECTED		MASS EMISSIONS		
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS
HC-FID	14	27.4	20.30	14	5.3	3.90	16.73 PPM
NOX-CHEM	15	61.5	30.75	15	0.0	0.0	70.95 PPM
CO2	23	52.0	1.122	23	2.0	0.017	1.068 %
CO	17	40.2	99.25	17	0.0	0.0	99.26 PPM
							1554.02 432.876 268.977
							9.02 2.512 1.561

BAG 2	3.910 MILES	6.293 KM	VMIX= 4680.0 CU.FT.	DILUTION FACTOR = 17.844	AUX. FIELD1	AUX. FIELD2	AUX. CODE
SITE #A216	EXHAUST SAMPLE		CORRECTED		MASS EMISSIONS		
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS
HC-FID	14	13.3	9.82	14	5.3	3.90	6.13 PPM
NOX-CHEM	15	34.5	17.43	15	0.0	0.0	17.43 PPM
CO2	23	36.0	0.750	23	2.3	0.042	0.710 %
CO	17	0.2	0.48	17	0.0	0.0	0.48 PPM
							1721.75 440.344 273.617
							0.07 0.019 0.012

WEIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.16	1.2	437.	1.21	20.2	8.6	11.6
BEFORE ROUNDING	0.1624	1.212	436.76	1.2134	20.1826	8.5971	11.6317
GRAMS/KM	0.101	0.75	271.	0.75	20.2	8.6	11.6
BEFORE ROUNDING	0.10122	0.7533	271.39	0.7539	20.2013	8.5884	11.6435
					72-74 FTP		
					UNWEIGHTED FTP		
					20.2	8.6	11.6
					20.2013	8.5884	11.6435

COMMENTS: PASSMASTER FERO TESTING. A/C ON. DEVICE ^{OFF} ON. HOT START T= 75 DEG. F

VEHICLE 1.0. VEH- STION EVAP INIT. CHG. CODE ACHP M.P. METH. EQUIVALENT TEST WEIGHT 2750 ACTUAL DYNO H.P. 9.9 TRANS. CONFIG. OVER-DRIVE CODE /----- TEST TYPE -----/ EXPERIMENTAL /----- TEST PROCEDURE -----/ CVS 75-LATER

PREP DATE CURR WEIGHT DRIVE AXLE WEIGHT GAUGE MEASURE AXLE MEASURE /--- IGNITION TIMING ---/ /----- % CO -----/ IDLE RPM GEAR SOAK PERIOD MEASURED COASTDOWN TIME

/- AMBIENT TEST CONDITIONS - /

BARO WET DRY CVS
 28.92 63.0 74.5 27.0

TEST DATE 11-1-79 OR 0207 ACTUAL INERTIA INDICATED DYNO H.P. 7.4 TIME 10613.9 PRESSURE 45.00 NOX FACTOR 0.9752 RELATIVE HUMIDITY 53.0 ALDEHYDES

BAG 1 3.564 MILES 5.736 KM 6310. ROLL REVS. VMIX= 2748.0 CU.FT. DILUTION FACTOR = 10.763
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM AUX. FIELD1 AUX. FIELD2 AUX. CODE
 HC-FID 15 39.7 59.60 15 2.9 4.31 55.64 PPM 2.50 0.701 0.436
 NOX-CHEM 15 54.5 53.80 15 0.0 0.0 53.80 PPM 7.81 2.191 1.361
 CO2 23 48.3 1.272 23 1.7 0.036 1.170 % 1645.12 467.191 290.299
 CO 20 18.7 372.27 20 0.1 1.91 370.53 PPM 33.57 9.419 5.853
 MPG 18.3 KPL 7.79 L/100KM

BAG 2 3.836 MILES 6.174 KM 8945. ROLL REVS. VMIX= 4597.0 CU.FT. DILUTION FACTOR = 16.871
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM AUX. FIELD1 AUX. FIELD2 AUX. CODE
 HC-FID 14 10.5 7.73 14 6.0 4.41 3.54 PPM 0.27 0.072 0.045
 NOX-CHEM 15 31.1 15.80 15 0.0 0.0 15.80 PPM 3.92 1.022 0.635
 CO2 23 33.7 0.793 23 2.0 0.042 0.754 % 1834.28 478.116 297.088
 CO 17 1.0 2.41 17 0.0 0.0 2.41 PPM 0.37 0.097 0.060
 MPG 18.5 KPL 7.88 L/100KM

BAG 3 3.553 MILES 5.719 KM 8245. ROLL REVS. VMIX= 2781.0 CU.FT. DILUTION FACTOR = 12.046
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM AUX. FIELD1 AUX. FIELD2 AUX. CODE
 HC-FID 14 20.0 14.77 14 5.1 3.75 11.35 PPM 0.51 0.145 0.090
 NOX-CHEM 15 61.0 30.24 15 0.0 0.0 30.24 PPM 4.53 1.275 0.792
 CO2 23 45.0 1.106 23 1.9 0.040 1.069 % 1540.41 433.504 269.367
 CO 17 21.4 53.04 17 0.0 0.0 53.04 PPM 4.86 1.369 0.850
 MPG 20.3 KPL 8.65 L/100KM

WEIGHTED VALUES HC CO CO2 NOX
 GMS/MILE 0.22 2.4 454. 1.33
 BEFORE ROUNDING 0.2221 2.376 453.62 1.3333
 GMS/KM 0.138 1.48 288. 0.83
 BEFORE ROUNDING 0.13892 1.4764 288.08 0.8245
 WEIGHTED VALUES MPG 18.9 KPL 8.1 L/100KM
 18.9300 8.0571 12.4113
 72-74 FTP 18.4 7.8 12.9
 18.4358 7.8378 12.7585
 UNWEIGHTED FTP 19.0 8.1 12.4
 19.0143 8.0838 12.3703

COMMENTS: PASSMASTER FEND TESTING
 A/C ON, DEVICE OFF

FR.	VEHICLE I.D.	VER-	REP.	REP.	RETEST	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE
ODE		SION	EVAP	INIT.	CHG.	CODE	ACHP	METH.	DYNO	EXPERIMENTAL
30	FAXON	9							H.P.	TEST PROCEDURE
								2750	9.9	HWFE

PREP DATE	COHM	DRIVE	AXLE	AXLE	IGNITION	TIMING	% CO	SOLE	SOAK	MEASURED
WEIGHT	WEIGHT	GAUGE	MEASURE	#1	#2	RPM	GEAR	LEFT	RIGHT	COASTDOWN
		EMPTY						COMB	RPM	GEAR

/- AMBIENT TEST CONDITIONS - /

BARO	WFT	DRY	CVS
"HG	BULB	BULB	UNITS
28.92	64.3	76.3	F 27C

TEST DATE	HW.	SITE	ACTUAL	INDICATED	DYNO	TIME	NOX	RELATIVE	ALDEHYDES
11- 1-79	09	0207	INERTIA	DYNO	H.P.	ODD%	PRESSURE	FACTORY	HUMIDITY
			2750	7.4		10624.7	45.00	0.4904	52.2

BAG 1	10.185	MILES	16.342	KM	23748	ROLL	REV'S.	VMIX=	3938.0	CU.FT.	DILUTION	FACTOR =	7.410
SITE #215	EXHAUST	SAMPLE	BACKGROUND	SAMPLE	CORRECTED	MASS	EMISSIONS	AUX.	AUX.	AUX.			
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1	FIELD2	CODE
HC-FTD	14	8.2	0.03	14	3.9	2.86	3.56 PPM	0.23	0.022	0.014			
NOX-CHEM	16	70.9	70.06	16	0.0	0.0	70.06 PPM	14.80	1.453	0.903	MPG	KPL	L/100KM
CO2	23	67.4	1.806	23	1.7	0.036	1.776 *	3622.76	355.682	221.011	24.9	10.59	9.4
CO	17	5.6	13.52	17	0.0	0.0	13.52 PPM	1.76	0.172	0.107			

WEIGHTED VALUES	HC	CO	CO2	NOX
GRAMS/MILE	0.02	0.2	356.	1.45
BEFORE ROUNDING	0.0224	0.172	355.68	1.4528
GRAMS/KM	0.014	0.11	221.	0.90
BEFORE ROUNDING	0.01345	0.1070	221.01	0.9027

WEIGHTED VALUES	MPG	KPL	L/100KM
	24.9	10.6	9.4
72-74 FTP	24.8840	10.5900	9.4427
	24.9	10.6	9.4
	24.9203	10.5947	9.4386
UNWEIGHTED FTP	24.9	10.6	9.4
	24.9203	10.5947	9.4386

COMMENTS: PASSMASTER FEMO TESTING
A/C ON, DEVICE OFF

VEH.	VEHICLE I.D.	VEH. REG. NO.	RETEST	ALT. H.P.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFIG.	OVER-DRIVE CODE	TEST TYPE
00E	FM4159F156932	510N	EVAP	INIT. CHG. CODE	ACHP	MECH.	4000	14.3	EXPERIMENTAL
20									TEST PROCEDURE
									CVS 75-LATER

PREP DATE	CURR WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION TIMING	% CO	IDLE RPM	SOAK PERIOD	MEASURED COASTDOWN TIME
					#1 #2 RPM GEAR	LEFT RIGHT COMB			

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DY	CVS
"HG	BULB	BULB UNITS	UNIT
29.32	52.5	73.5	F 270

TEST DATE	NO. SITE	DYNO SETTING	ACTUAL INERTIA	INDICATED DYNO H.P.	DYNO H.P.	TIME PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11-7-79	09 0207	4000		11.5		12765.0 45.00	0.9667	54.0	

RAG 1 3.553 MILES 5.765 KM 0353. ROLL REVS.		VMIX= 2790.0 CU.FT.		DILUTION FACTOR = 8.049							
SITE #A215 EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX. FIELD1 AUX. FIELD2 AUX. CODE			
RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM		
HC-FID	15	31.2	43.73	15	1.0	3.00	91.10 PPM	4.15	1.159	0.720	
NOX-CHEM	15	34.3	33.74	15	0.1	0.10	33.66 PPM	4.92	1.372	0.853	
CO2	23	50.9	1.771	23	1.9	0.040	1.556 %	2247.69	627.956	390.194	
CO	20	31.3	542.77	20	0.2	3.83	639.44 PPM	54.82	16.418	10.202	
									MPG	KPL	L/100KM
									13.5	5.73	17.4

RAG 2 3.840 MILES 6.180 KM 0454. ROLL REVS.		VMIX= 4774.0 CU.FT.		DILUTION FACTOR = 13.939							
SITE #A215 EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX. FIELD1 AUX. FIELD2 AUX. CODE			
RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM		
HC-FID	14	25.6	15.95	14	3.5	2.79	16.37 PPM	1.28	0.332	0.207	
NOX-CHEM	15	44.5	47.95	15	0.1	0.05	47.81 PPM	11.95	3.112	1.934	
CO2	23	39.7	0.955	23	2.0	0.042	0.917 %	2268.00	590.574	366.966	
CO	17	14.7	35.65	17	0.0	0.0	35.65 PPM	5.61	1.461	0.908	
									MPG	KPL	L/100KM
									14.9	6.35	15.8

RAG 3 3.575 MILES 5.754 KM 0330. ROLL REVS.		VMIX= 2794.0 CU.FT.		DILUTION FACTOR = 9.822							
SITE #A215 EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX. FIELD1 AUX. FIELD2 AUX. CODE			
RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM		
HC-FID	14	45.0	71.35	14	4.0	2.44	68.73 PPM	3.14	0.879	0.546	
NOX-CHEM	16	37.0	36.63	16	0.0	0.0	36.63 PPM	5.38	1.503	0.934	
CO2	23	52.7	1.334	23	2.0	0.042	1.296 %	1879.57	525.715	326.664	
CO	17	93.7	233.91	17	0.0	0.0	233.91 PPM	21.59	6.038	3.752	
									MPG	KPL	L/100KM
									16.5	7.01	14.3

WEIGHTED VALUES	HC	CO	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.65	5.8	540.	2.31		15.0	6.4	15.7
BEFORE ROUNDING	0.6539	5.822	500.50	2.3088		15.0008	6.3664	15.7072
GRAMS/KM	0.4005	3.62	361.	1.43	72-74 FTP	14.2	6.0	16.6
BEFORE ROUNDING	0.40635	3.6181	360.71	1.4346		14.2053	6.0392	16.5582
					UNWEIGHTED FTP	14.9	6.3	15.8
						14.8756	6.3243	15.8119

COMMENTS: PASSMASTER FELD TESTING

BASELINE

HCO. 4-20 SPAN POINT COULD NOT BE REACHED. SHORT BY .5 DEFLECTION

VEH. CODE	VEHICLE I.D.	VEH. SIGN	VEH. EVAP	VEH. INIT.	VEH. CHG.	VEH. CODE	VEH. ACHP	VEH. METH.	VEH. WEIGHT	VEH. H.P.	VEH. TRANS. CONFIG.	VEH. OVER-DRIVE CODE	TEST TYPE
20	FM4169F150432	0							4000	14.3			EXPERIMENTAL
TEST PROCEDURE -----/ MWFE													

PREP DATE	COMP WEIGHT	DRIVE SHALE WEIGHT	AXLE MEASURE	AXLE MEASURE	IGNITION TIMING #1	IGNITION TIMING #2	IGNITION TIMING RPM	IGNITION TIMING GEAR	% CO LEFT	% CO RIGHT	% CO COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME

/ AMBIENT TEST CONDITIONS - /

BARO	WFT	DAY	WIND
29.31	63.6	74.5	F 20

TEST DATE	HR.	SITE	ACTUAL IDLE	INDICATED IDLE	VEH. H.P.	VEH. H.P.	VEH. H.P.	VEH. H.P.	VEH. H.P.	VEH. H.P.	VEH. H.P.	VEH. H.P.	VEH. H.P.	VEH. H.P.	VEH. H.P.
11-7-79	10	0207	4000	11.5	12775.0	45.00	0.9553	47.0							

BAG 1	10.199 MILES	15.413 KM	23.774	ROLL REVS.	VMIX= 4046.0 CU.FT.	DILUTION FACTOR = 6.776	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE
SITE #215										
HC+HIO	14	43.2	32.13	14	4.0	2.94	29.67 PPM	1.96	0.192	0.119
NOX+CHEM	17	26.0	61.95	17	0.0	0.0	65.96 PPM	13.81	1.354	0.841
CO2	23	72.0	1.945	23	1.9	0.040	1.911 %	4047.75	396.889	246.616
CO	17	38.0	93.10	17	0.0	0.0	93.10 PPM	12.42	1.218	0.757

WEIGHTED VALUES	HC	CO	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.19	1.2	37.7	1.35	22.2	9.4	10.6	
BEFORE ROUNDING	0.1922	1.217	37.648	1.3539	22.1987	9.4247	10.6104	
GRAMS/KM	0.119	0.76	24.7	0.84	72-74 FTP	22.2	9.4	10.6
BEFORE ROUNDING	0.11944	0.7595	24.661	0.8412	22.2132	9.4438	10.5889	
					UNWEIGHTED FTP	22.2	9.4	10.6
						22.2132	9.4438	10.5889

COMMENTS: PASSMASTER FORD TESTING
BASELINE

FR.	VER-	MFH.	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE
CODE	SIGN	REP. RUN. METEST	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
20	0	INIT. CHG. CODE ACHP	METH.	WEIGHT	H.P.	CONF.	TEST PROCEDURE
FM41G9F150932	N			4000	14.3		CVS 75-LATER

[illegible]

1- AMBIENT TEST CONDITIONS - 1

HARD	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
28.84	61.7	74.7 F	27C

TEST DATE	HR.	DYNO SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DVU H.P.	ODOM.	TIRE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11-2-79	09	D207	4000	11.5		12859.0	45.00	0.9479	47.8	

BAG 1 3.583 MILES 5.767 KM 8355. ROLL REVS.		VMIX= 2730.0 CU.FT.		DILUTION FACTOR = 7.560			AUX. AUX. AUX.						
SITE #A215 EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED			MASS EMISSIONS			FIELD1 FIELD2 CODE			
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM			
HC-FID	16	40.7	122.24	16	1.0	3.00	119.68 PPM	5.34	1.489	0.925			
NOX-CHEM	16	37.8	37.46	16	0.0	0.0	37.46 PPM	5.25	1.465	0.910	MPG	KPL	L/100KM
CO2	23	63.2	1.666	23	2.1	0.044	1.624 %	2302.66	642.587	399.285	13.0	5.51	18.2
CO	19	94.4	941.22	19	0.0	0.0	941.22 PPM	84.72	23.642	14.690			

BAG 2 3.819 MILES 6.146 KM 890% ROLL REVS.		VMIX= 46H4.0 CU.FT.		DILUTION FACTOR = 12.973			AUX.						
SITE #A215 EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED			MASS EMISSIONS			AUX.			
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1	FIELD2	CODE
HC-FID	14	29.6	22.11	14	4.8	3.53	18.85 PPM	1.44	0.378	0.235			
NOX-CHEM	15	52.1	26.37	15	0.3	0.15	26.22 PPM	6.31	1.651	1.026	MPG	KPL	L/100KM
CO2	23	42.2	1.026	23	2.0	0.042	0.987 %	2395.45	627.264	389.764	14.0	5.97	16.8
CO	17	20.1	48.87	17	0.0	0.0	48.87 PPM	7.55	1.976	1.228			

HAG 3 3.555 MILES 5.721 MM H244. ROLL REVS.		VMIX= 2726.0 CU.FT.		DILUTION FACTOR = 9.283									
SITE #A715		EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX. FIELD1		AUX. FIELD2	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM			
HC-FID	14	46.4	72.42	14	4.2	3.09	69.67 PPM	3.10	0.872	0.542			
NOX-CHEM	15	87.2	44.12	15	0.2	0.10	44.03 PPM	6.16	1.733	1.077	MPG	KPL	L/100KM
CO2	23	55.0	1.404	23	2.0	0.042	1.367 %	1930.71	543.040	337.454	15.9	6.75	14.8
CO	18	64.8	318.30	17	0.0	0.0	318.30 PPM	28.61	8.047	5.000			

WEIGHTED VALUES	HC	CO	CO2	NOx
GRAMS/MILE	0.14	8.2	607.	1.64
BEFORE ROUNDING	0.7448	8.154	607.31	1.6350
GRAMS/KM	0.463	5.07	377.	1.02
BEFORE ROUNDING	0.46285	5.0668	377.37	1.0159

	MPG	KPL	L/100KM
WEIGHTED VALUES	14.3	6.1	16.5
	14.2521	6.0623	16.4952
72-74 FTP	13.5	5.7	17.4
	13.5007	5.7397	17.4223
UNWEIGHTED FTP	14.2	6.0	16.6
	14.1921	6.0336	16.5735

COMMENTS: PASSMASTER FEED TESTING
DEVICE OFF. A/C ON FULL

FR. VFK- MFW. REP. RUN. RETEST ALT. EQUIVALENT ACTUAL OVER- /----- TEST TYPE -----/
 CODE VEHICLE I.D. SION EVAP INIT. CHG. CODE ACHP METH. TEST DYN0 TRANS. DRIVE EXPERIMENTAL
 20 FM41G9F150932 0 N 4000 14.3 CODE /----- TEST PROCEDURE -----/
 HWFE

PREP DATE CURR DRIVE AXLE /--- IGNITION TIMING ---/ /----- % CO -----/ IDLE MEASURED
 WEIGHT WEIGHT GAUGE AXLE MEASURE #1 #2 RPM GEAR LEFT RIGHT COMB RPM GEAR SOAK COASTDOWN
 EMPTY TIME

/- AMBIENT TEST CONDITIONS - /

HARD WET DRY CVS
 "HG BULB BULB UNITS UNIT
 28.94 61.7 75.0 F 27C

TEST DATE HR. SITE ACTUAL INERTIA INDICATED DVU TIRE NOX RELATIVE ALDEHYDES
 11-8-79 16 0207 4000 11.5 12871.0 45.00 0.9458 46.9

BAG 1 10.148 MILES 16.332 KM 23661. ROLL REVS. VMIX= 3436.0 CU.FT. DILUTION FACTOR = 6.240
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM AUX. AUX. AUX.
 HC-FID 14 58.0 43.35 14 4.5 3.31 40.58 PPM 2.61 0.257 0.160 FIELD01 FIELD02 CODE
 NOX-CHEM 17 31.0 78.61 17 0.0 0.0 78.61 PPM 15.85 1.562 0.970 MPG KPL L/100KM
 CO2 23 76.5 2.125 23 2.0 0.042 2.090 % 4261.75 419.956 260.948 20.9 8.88 11.3
 CO 18 37.1 179.25 18 0.0 0.0 179.25 PPM 23.26 2.292 1.424

WEIGHTED VALUES HC CO CO2 NOX WEIGHTED VALUES MPG KPL L/100KM
 GRAMS/MILE 0.26 2.3 420. 1.56 20.9 8.9 11.3
 BEFORE ROUNDING 0.2570 2.242 419.95 1.5618 20.8937 8.8826 11.2578
 GRAMS/KM 0.160 1.42 261. 0.97 20.9 8.9 11.3
 BEFORE ROUNDING 0.15469 1.4242 260.94 0.9704 20.9067 8.8883 11.2506
 72-74 FTP 20.9 8.9 11.3
 UNWEIGHTED FTP 20.9 8.9 11.3
 20.9067 8.8883 11.2506

COMMENTS: PASSMASTER FERO TESTING
 DEVICE OFF. A/C ON FULL

DYNO SITE:D220 TEST # 80-0462

MFR.	VER-	MFR.	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE
CODE	SION	REP. RUN. RETEST	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
20	EVAP	INIT. CHG. CODE	METH.	WEIGHT	H.P.	CODE	TEST PROCEDURE
FM41G9F150932	0	N		4000	14.3		BAG BY BAG

PREP DATE	CURB	DRIVE	AXLE	AXLE	IGNITION	TIMING	% CO	IDLE	SOAK	MEASURED
WEIGHT	WEIGHT	GAUGE	MEASURE	#1	#2	RPM	GEAR	LEFT	RIGHT	COMB
		EMPTY								

AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNITS
29.22	59.0	75.0	0
			20C

TEST DATE	HR.	DYNO	INERTIA	INDICATED	DVU	TIRE	NOX	RELATIVE	ALDEHYDES
10-7-79	15	0220	SETTING	DYNO	H.P.	ODOM.	PRESSURE	FACTOR	HUMIDITY
			4000	14.3		12821.0	45.00	1.0058	57.5

BAG 1	3.390 MILES	5.778 KM	VMIX= 2798.0 CU.FT.	DILUTION FACTOR = 9.507									
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS									
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX.	AUX.	AUX.
HC-FID	15	49.0	73.64	15	2.6	3.87	70.17 PPM	3.21	0.893	0.555	MPG	KPL	L/100KM
NOX-CHEM	15	83.8	41.95	15	0.0	0.0	41.95 PPM	6.39	1.781	1.107			
CO2	23	54.0	1.374	23	1.7	0.036	1.342 %	1945.01	541.785	336.650			
CO	19	31.3	285.30	19	0.0	0.0	285.30 PPM	26.32	7.331	4.555			

BAG 2	3.910 MILES	6.293 KM	VMIX= 4754.0 CU.FT.	DILUTION FACTOR = 14.541									
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS									
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX.	AUX.	AUX.
HC-FID	14	32.3	23.98	14	5.7	4.19	20.08 PPM	1.56	0.399	0.248	MPG	KPL	L/100KM
NOX-CHEM	15	40.3	20.32	15	0.0	0.0	20.32 PPM	5.26	1.346	0.836			
CO2	23	38.2	0.915	23	1.6	0.034	0.883 %	2175.72	556.450	345.762			
CO	17	18.9	45.92	17	0.0	0.0	45.92 PPM	7.20	1.841	1.144			

COMMENTS: PASSMASTER PERU TESTING
NO AC OR DEVICE

25 of 53

MFR. CODE	VEHICLE I.D.	VER- SION	EVAP	MFR. REP. INIT.	RUN. CHG.	RETEST CODE	ACHP	ALT. H.P. METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFIG.	OVER-DRIVE CODE	TEST TYPE
20	FM41G9F150932	0	N						4000	14.3			EXPERIMENTAL
/----- TEST PROCEDURE -----/													
BAG BY BAG													

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION #1	TIMING #2	RPM	GEAR	% CO LEFT	% CO RIGHT	COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNITS
29.21	57.0	74.0	U 20C

TEST DATE	HR.	DYNO SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DVU H.P.	ODOM.	TIME PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11-7-79	16	0220	4000	14.3		12829.0	45.00	0.9810	55.4	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2776.0 CU.FT.	DILUTION FACTOR = 8.859	MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE
SITE #A215	EXHAUST SAMPLE	BACKGROUND	SAMPLE	CORRECTED	GMS.	GMS/MI	GMS/KM			
HC-FID	15 55.0 82.69	15 3.3 4.91	78.33 PPM	3.55	0.989	0.615				
NOX-CHEM	15 104.0 52.77	15 0.0 0.0	52.77 PPM	7.78	2.168	1.347	MPG	KPL	L/100KM	
CO2	23 57.0 1.467	23 1.8 0.038	1.433 %	2061.59	574.260	356.828	15.0	6.36	15.7	
CO	19 40.6 373.96	19 0.0 0.0	373.96 PPM	34.23	9.534	5.924				

BAG 2	3.910 MILES	6.293 KM	VMIX= 4741.0 CU.FT.	DILUTION FACTOR = 13.271	MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE
SITE #A215	EXHAUST SAMPLE	BACKGROUND	SAMPLE	CORRECTED	GMS.	GMS/MI	GMS/KM			
HC-FID	14 41.2 30.67	14 7.7 5.66	25.43 PPM	1.97	0.504	0.313				
NOX-CHEM	15 54.2 27.42	15 0.2 0.10	27.33 PPM	6.88	1.760	1.094	MPG	KPL	L/100KM	
CO2	23 41.1 0.995	23 2.0 0.042	0.956 %	2348.47	600.632	373.216	14.5	6.18	16.2	
CO	17 47.7 117.32	17 0.0 0.0	117.32 PPM	18.34	4.690	2.914				

COMMENTS: PASSMASTER PERD TESTING
WITH AC & NO DEVICE

15.0 mpg for 3.59 miles
14.5 mpg for 3.910 miles

DYNO SITE: D220 TEST # 80-0465

MFR.	VEHICLE I.D.	VFW- SION	EVAP	MFR. REP.	HUN.	RETEST	ALT. H.P.	EQUIVALENT TEST	ACTUAL DYNO	TRANS. CONFG.	OVER- DRIVE	TEST TYPE
20	FM41G9F150932	U	N	INIT.	CHG.	CODE	ACHP	WEIGHT	H.P.		CODE	EXPERIMENTAL
								4000	14.3			TEST PROCEDURE
												BAG BY BAG

PREP DATE	CURR WEIGHT	UPIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION	TIMING	% CO	IDLE	SOAK	MEASURED
					#1	#2	LEFT	RPM	PERIOD	COASTDOWN
							RIGHT	COMB		TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WFT	UPY	CVS
"HG	BULB	BULB	UNIT
29.18	59.0	74.0	0

TEST DATE	MP.	SITE	ACTUAL INERTIA	INDICATED DYNO	DVV H.P.	TIME PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11- 7-79	17	0220	4000	14.3		12845.0	45.00	1.0063	59.5

BAG 1	3.590 MILES	5.770 KM	VMIX= 2754.0 CU.FT.	DILUTION FACTOR = 8.981					
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.		
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI
HC-FID	15	49.8	74.84	15	3.3	4.91	70.48 PPM	3.17	0.883
NOX-CHEM	15	101.2	51.32	15	0.3	0.15	51.18 PPM	7.68	2.140
CO2	23	56.3	1.445	23	1.9	0.040	1.410 %	2011.18	560.217
CO	19	42.4	396.23	19	0.0	0.0	396.23 PPM	35.98	10.022

BAG 2	3.910 MILES	6.293 KM	VMIX= 4721.0 CU.FT.	DILUTION FACTOR = 13.049					
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.		
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI
HC-FID	14	42.2	31.42	14	6.4	4.71	27.08 PPM	2.09	0.534
NOX-CHEM	15	49.2	24.91	15	0.3	0.15	24.76 PPM	6.37	1.630
CO2	23	41.6	1.009	23	1.9	0.040	0.972 %	2377.77	608.125
CO	17	60.2	148.75	17	0.2	0.48	148.30 PPM	23.08	5.904

COMMENTS: PASSMASTER FEED TESTING
A/C UNIT DEVICE ON

MFR. CODE	VEHICLE I.D.	VEH- SION	EVAP	MFR. REP. INIT.	RUN. CHG.	RETEST CODE	ACHP	ALT. H.P.	METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFG.	OVER-DRIVE CODE	/----- TEST TYPE -----/ EXPERIMENTAL /----- TEST PROCEDURE -----/ BAG BY BAG
20	FM41G9F150932	0	N							4000	14.3			

PREP DATE	CLWB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	/--- IGNITION TIMING ---/	#1	#2	RPM	GEAR	/----- % CO -----/	LEFT	RIGHT	COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	-------------	-------------------	-------------	--------------	---------------------------	----	----	-----	------	--------------------	------	-------	------	----------	------	-------------	-------------------------

/- AMBIENT TEST CONDITIONS - /

HARD	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
29.16	59.0	74.0	0 20C

TEST DATE	DYNO HP.	SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DVU H.P.	ODOM.	TIME PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11- 7-79	18	0220	4000	14.3		12452.0	45.00	1.0063	59.5	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2774.0 CU.FT.	DILUTION FACTOR = 9.023													
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE					
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM							
HC-FID	15	50.3	75.60	15	3.2	4.76	71.36 PPM	3.23	0.900	0.560							
NOX-CHEM	15	94.4	47.81	15	0.3	0.15	47.67 PPM	7.21	2.008	1.247	MPG	KPL	L/100KM				
CO2	23	56.2	1.442	23	1.9	0.040	1.406 %	2021.26	563.025	349.847	15.3	6.50	15.4				
CO	19	38.4	357.59	19	0.0	0.0	357.59 PPM	32.71	9.110	5.661							

BAG 2	3.910 MILES	6.293 KM	VMIX= 4654.0 CU.FT.	DILUTION FACTOR = 13.058													
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE					
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM							
HC-FID	14	39.1	29.09	14	6.4	4.71	24.74 PPM	1.88	0.481	0.299							
NOX-CHEM	15	50.8	25.71	15	0.4	0.21	25.52 PPM	6.47	1.656	1.029	MPG	KPL	L/100KM				
CO2	23	41.7	1.012	23	1.9	0.040	0.975 %	2350.79	601.226	373.584	14.5	6.18	16.2				
CO	17	47.1	115.82	17	0.3	0.72	115.15 PPM	17.67	4.519	2.808							

COMMENTS: PASSMASTER FEND TESTING A/C ON DEVICE ON
BAG 2 VMIX LOW BECAUSE DRIVER HIT SOAK INSTEAD OF MAG 2 FOR 10 SECS

29 of 53

MFR. CODE	VEHICLE I.D.	VER- SION	EVAP	MFR. REP. INIT.	CHG. CODE	RETEST ACHP	ALT. H.P. METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFIG.	OVER- DRIVE CODE	TEST TYPE
20	FM41G9F150932	0	N					4000	14.3			EXPERIMENTAL

TEST PROCEDURE -----
BAG BY BAG

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION #1	TIMING #2	RPM	GEAR	% CO LEFT	% CO RIGHT	COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	-------------	-------------------	-------------	--------------	-------------	-----------	-----	------	-----------	------------	------	----------	------	-------------	-------------------------

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNITS
28.82	56.0	85.0	0
			20C

TEST DATE	HR.	DYNO SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DVU H.P.	ODOM.	TIME PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11-8-79	13	0220	4000	14.3		12898.0	45.00	0.9738	37.3	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2772.0 CU.FT.	DILUTION FACTOR = 9.790
SITE #A216	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS
	RANGE	METER	CONC.	CONCENTRATIONS
HC-FID	15	58.8	88.30	3.85
NOX-CHEM	15	74.7	37.58	5.49
CO2	23	58.7	1.319	1845.01
CO	19	42.5	406.67	37.09

AUX. FIELD1 AUX. FIELD2 AUX. CODE
MPG KPL L/100KM
16.6 7.07 14.2

AG 2	3.910 MILES	6.293 KM	VMIX= 4699.0 CU.FT.	DILUTION FACTOR = 14.836
SITE #A216	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS
	RANGE	METER	CONC.	CONCENTRATIONS
HC-FID	14	34.3	25.46	1.64
NOX-CHEM	15	38.6	19.49	4.82
CO2	23	41.7	0.693	2087.11
CO	17	30.3	74.43	11.53

AUX. FIELD1 AUX. FIELD2 AUX. CODE
MPG KPL L/100KM
16.4 6.99 14.3

COMMENTS: PASSMASTER FWD TESTING BASELINE ROOM 45 DEG. F NO A/C! NO DEVICE

FR. CODE	VEHICLE I.D.	VER- SION	EVAP	MFR. REP.	RUN. INIT.	RETEST CHG.	CODE	ACHP	ALT. H.P.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFG.	OVER- DRIVE CODE	TEST TYPE
20	FM41G9F150932	U	N						METH.	4000	14.3			EXPERIMENTAL
														TEST PROCEDURE
														BAG BY BAG

[illegible]

1- AMBIENT TEST CONDITIONS - 1

BARO	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
28.84	59.0	43.0 D	20C

TEST DATE	HR.	GYNO SITE	ACTUAL INERTIA SETTING	INDICATED GYRO H.P.	OVU H.P.	ODOM.	TIRE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11- 8-79	14	0220	4000	14.3		12906.0	45.00	1.0107	44.3	

BAG 1 3.590 MILES 5.778 KM		EXHAUST SAMPLE		BACKGROUND SAMPLE		VMIX= 2751.0 CU.FT. CORRECTED		DILUTION FACTOR = 9.740 MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM			
HC-FID	15	58.9	88.45	15	3.7	5.52	83.50 PPM	3.75	1.045	0.649			
NOX-CHEM	15	74.5	37.48	15	0.2	0.10	37.39 PPM	5.63	1.568	0.974			
CO2	23	58.9	1.325	23	2.0	0.039	1.290 %	1838.55	512.130	318.223	MPG	KPL	L/100KM
CO	19	44.3	424.44	19	0.1	0.93	423.60 PPM	38.42	10.702	6.650	16.7	7.08	14.1

BAG 2 3.910 MILES 6.293 KM			VMIX= 4676.0 CU.FT.			DILUTION FACTOR = 14.710								
SITE #A216 EXHAUST SAMPLE			BACKGROUND SAMPLE			CORRECTED CONCENTRATIONS			MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE
RANGE	METER	CUNC.	RANGE	METER	CUNC.	GMS.	GMS/MI	GMS/KM						
HC-FID	14	36.6	27.18	14	7.0	5.16	22.38 PPM	1.71	0.437	0.272				
NOx-CHEM	15	36.9	18.63	15	0.0	0.0	18.63 PPM	4.77	1.220	0.758				
CO2	23	42.0	0.900	23	1.7	0.033	0.870 %	2107.45	538.989	334.912	MPG	KPL	L/100KM	
CO	17	31.8	78.18	17	0.3	0.72	77.51 PPM	11.95	3.056	1.899	16.3	6.92	14.5	

COMMENTS: PASSMASTER TESTING BASELINE ROOM @ 85 DEG. F NO A/C & NO DEVICE

FR.	VER-	MFR.	REP.	RUN.	RETEST	ALT.	EQUIVALENT	ACTUAL		OVER-	/----- TEST TYPE -----/
CODE	VEHICLE	SION	EVAP	INIT.	CHG.	CODE	ACHP	METH.	WEIGHT	DYNO	EXPERIMENTAL
20	FM41G9F150932	U	N						4000	14.3	/----- TEST PROCEDURE -----/
											BAG BY BAG

PREP DATE	CUPB	UMIVE	AXLE	AXLE	IGNITION	TIMING	% CO	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	GAUGE	MEASURE	#1	#2	LEFT	RPM	GEAR	COASTDOWN
			EMPTY				RIGHT		PERIOD	TIME

/- AMBIENT TEST CONDITIONS - /

HARD	WET	DRY	CVS
"HG	BULB	BULB	UNIT
28.86	56.0	83.0	20C

TEST DATE	DYNO	INERTIA	INDICATED	DYNO	TIME	NOX	RELATIVE	
11- 8-79	14	D220	4000	14.3	12914.0	45.00	0.9733	39.7

BAG 1	3.590	MILES	5.778	KM	VMIX=	2705.0	CU.FT.	DILUTION FACTOR =	9.004
SITE #A216	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI
HC-FID	15	64.0	46.12	15	3.5	5.23	91.47 PPM	4.04	1.125
NOX-CHEM	15	95.0	47.45	15	0.0	0.0	47.85 PPM	6.82	1.901
CO2	23	62.0	1.407	23	2.0	0.039	1.372 %	1923.41	535.769
CO	19	73.4	719.48	19	0.0	0.0	719.48 PPM	64.17	17.873

BAG 2	3.910	MILES	6.293	KM	VMIX=	4667.0	CU.FT.	DILUTION FACTOR =	13.181
SITE #A216	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI
HC-FID	14	62.3	46.53	14	6.4	5.09	41.83 PPM	3.19	0.815
NOX-CHEM	15	45.5	22.74	15	0.1	0.05	22.89 PPM	5.63	1.440
CO2	23	45.3	0.940	23	2.0	0.039	0.945 %	2283.89	584.115
CO	17	128.0	318.08	17	0.0	0.0	318.08 PPM	48.94	12.518

COMMENTS: PASSMASTER FERG TESTING ROOM @ 85 DEG. F A/C ON & DEVICE OFF

MFR. VEHICLE I.O. VEH- SION EVAP INIT. CHG. CODE ACHP METH. ALT. EQUIVALENT ACTUAL TRANS. OVER- /----- TEST TYPE -----/
 CODE 20 FM4109F150932 U N H.P. H.P. TEST DYN0 H.P. DRIVE EXPERIMENTAL
 4000 14.3 CONF. CODE /----- TEST PROCEDURE -----/
 BAG BY BAG

DRIVE AXLE AXLF /--- IGNITION TIMING ---/ /----- % CO -----/ MEASURED
 CURR WEIGHT WEIGHT GAUGE MEASURE #1 #2 RPM GEAR LEFT RIGHT COMB RPM GEAR PERIOD COASTDOWN
 PREP DATE TIME EMPTY

/- AMBIENT TEST CONDITIONS - /
 BARO WET DRY CVS
 "HG BULB BULB UNITS UNIT
 29.68 55.0 83.0 U 20.0

ACTUAL INERTIA INDICATED DYNO TIRE NOX RELATIVE
 TEST DATE HP. SITE SETTING DYN0 H.P. H.P. ODOM. PRESSURE FACTOR HUMIDITY ALDEHYDES
 11- 8-79 15 0220 4000 14.3 12921.0 45.00 0.9642 38.3

BAG 1 3.590 MILES 5.774 KM VMIX= 2724.0 CU.FT. DILUTION FACTOR = 9.095
 SITE #A216 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM FIELD1 FIELD2 CODE
 HC-FID 15 61.0 41.61 15 3.4 5.08 87.04 PPM 3.87 1.079 0.671
 NOX-CHEM 15 97.0 48.87 15 0.2 0.10 48.78 PPM 6.94 1.933 1.201
 CO2 23 61.0 1.396 23 2.0 0.034 1.362 % 1921.79 535.317 332.630
 CO 14 69.7 681.04 14 0.1 0.93 680.26 PPM 61.09 17.018 10.574
 MPG KPL L/100KM
 15.7 6.67 15.0

BAG 2 3.910 MILES 6.243 KM VMIX= 4659.0 CU.FT. DILUTION FACTOR = 12.898
 SITE #A216 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM FIELD1 FIELD2 CODE
 HC-FID 14 41.3 60.95 14 6.9 5.09 56.25 PPM 4.28 1.095 0.680
 NOX-CHEM 15 39.0 19.64 15 0.1 0.05 19.64 PPM 4.78 1.222 0.759
 CO2 23 45.4 0.943 23 1.6 0.031 0.954 % 2303.24 589.065 366.028
 CO 14 100.2 502.51 14 0.0 0.0 502.51 PPM 77.19 19.741 12.267
 MPG KPL L/100KM
 14.2 6.05 16.5

COMMENTS: PASSMASTER FEPO TESTING COLD ROOM @ 85 DEG. F A/C ONI DEVICE OFF
 ROOM TEMP OUT OF SPEC @ 100 DEG. F

FR. CODE	VEHICLE I.D.	VFV- SION	EVAP	INIT.	CHG.	REF. PUN. RETEST CODE	ACHP	ALT. H.P. METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFIG.	OVER-DRIVE CODE	TEST TYPE	EXPERIMENTAL	TEST PROCEDURE	BAG BY BAG
20	FM4169F150932	0	N						4000	14.3						

PREP DATE	CURR WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION #1	TIMING #2	HPM	GEAR	% CO LEFT	% CO RIGHT	COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	-------------	-------------------	-------------	--------------	-------------	-----------	-----	------	-----------	------------	------	----------	------	-------------	-------------------------

/- AMBIENT TEST CONDITIONS - /

HARD	WET	DRY	CVS
"HG	BULB	BULB	UNIT
28.88	54.0	87.0	0
			20C

TEST DATE	HR.	SITE	DYNO	INERTIA SETTING	INDICATED DYNO H.P.	DVU H.P.	ODOM.	TIRE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11-8-79	16	0220		4000	14.3		12929.0	45.00	0.9517	32.5	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2755.0 CU.FT.	DILUTION FACTOR = 9.031	AUX. FIELD1	AUX. FIELD2	AUX. CODE
SITE #A216	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS			
	RANGE METER CONC.	RANGE METER CONC.	CONCENTRATIONS	GMS. GMS/MI GMS/KM			
HC-FID	15 74.5 111.46	15 3.1 4.63	107.75 PPM	4.85 1.350 0.839			
NOX-CHEM	15 85.0 42.78	15 0.0 0.0	42.78 PPM	6.07 1.692 1.051	MPG	KPL	L/100KM
CO2	23 60.8 1.375	23 2.0 0.039	1.340 %	1913.31 532.955 331.163	15.4	6.54	15.3
CO	19 97.7 978.79	19 0.0 0.0	978.79 PPM	88.91 24.765 15.388			

BAG 2	3.910 MILES	6.293 KM	VMIX= 4663.0 CU.FT.	DILUTION FACTOR = 13.011	AUX. FIELD1	AUX. FIELD2	AUX. CODE
SITE #A216	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS			
	RANGE METER CONC.	RANGE METER CONC.	CONCENTRATIONS	GMS. GMS/MI GMS/KM			
HC-FID	14 80.9 60.64	14 6.3 4.64	56.36 PPM	4.29 1.098 0.682			
NOX-CHEM	15 39.2 19.79	15 0.0 0.0	19.79 PPM	4.76 1.216 0.756	MPG	KPL	L/100KM
CO2	23 45.0 0.973	23 1.7 0.033	0.943 %	2277.31 582.431 361.906	14.4	6.11	16.4
CO	18 101.7 510.35	18 0.0 0.0	510.35 PPM	78.46 20.067 12.469			

COMMENTS: PASSMASTER FLOW TESTING COLD ROOM = 85 DEG. A/C UNIT DEVICE OFF

FR.	VEHICLE I.D.	VEH- SION EVAP	MFR. REF. RUM. RETEST	ALT. H.P.	EQUIVALENT TEST WEIGHT	ACTUAL DYNO H.P.	TRANS. CONFG.	OVER- DRIVE CODE	/----- TEST TYPE -----/ EXPERIMENTAL /----- TEST PROCEDURE -----/ BAG BY BAG
CODE	20 FM41G9F150932	U N	INIT. CHG. CODE	ACHP METH.	4000	14.3			

PREP DATE	CURR WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	/--- IGNITION TIMING ---/ #1 #2 RPM GEAR	/----- % CO -----/ LEFT RIGHT COMB	IDLE RPM	SOAK GEAR PERIOD	MEASURED COASTDOWN TIME
-----------	----------------	-------------------------	----------------	-----------------	---	---------------------------------------	-------------	---------------------	-------------------------------

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
29.89	59.0	85.0 U	20C

TEST DATE	HR.	MIN.	DYNO	INERTIA SETTING	INDICATED DYNO H.P.	DUV H.P.	ODOM.	TIRE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11- 8-79	16	0220		4000	14.3		12935.0	45.00	1.0100	41.5	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2727.0 CU.FT.				DILUTION FACTOR = 9.009						
SITE #A216	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS			AUX.	AUX.	AUX.	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1	FIELD2	CODE
HC-FID	15	61.3	42.06	15	3.0	4.48	88.08 PPM	3.92	1.093	0.679			
NOX-CHEM	15	79.2	39.85	15	0.1	0.05	39.80 PPM	5.94	1.654	1.028	MPG	KPL	L/100KM
CO2	23	61.9	1.404	23	2.3	0.044	1.365 %	1927.98	537.041	333.702	15.6	6.62	15.1
CO	19	75.5	741.39	19	0.0	0.0	741.39 PPM	66.66	18.568	11.537			

BAG 2	3.910 MILES	6.243 KM	VMIX= 4664.0 CU.FT.				DILUTION FACTOR = 13.075						
SITE #A216	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS			AUX.	AUX.	AUX.	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1	FIELD2	CODE
HC-FID	14	64.1	47.90	14	6.2	4.57	43.68 PPM	3.33	0.852	0.529			
NOX-CHEM	15	45.3	22.44	15	0.1	0.05	22.79 PPM	5.82	1.489	0.925	MPG	KPL	L/100KM
CO2	23	45.6	0.987	23	2.0	0.039	0.952 %	2302.15	588.784	365.854	14.5	6.16	16.2
CO	18	66.0	326.13	18	0.0	0.0	326.13 PPM	50.19	12.837	7.976			

COMMENTS: PASSMASTER FERO TESTING ROOM @ 85 DEG. F A/C ON & DEVICE ON
BLUE LEHAPON

FR. VEHICLE 1.0. VER- SION EVAP INIT. CHG. CODE ACHP METH. ALT. H.P. EQUIVALENT TEST WEIGHT 4000 ACTUAL DYNO H.P. 14.3 TRANS. CONFIG. OVER-DRIVE CODE /----- TEST TYPE -----/ EXPERIMENTAL /----- TEST PROCEDURE -----/ BAG BY BAG

PREP DATE CURB WEIGHT DRIVE AXLE WEIGHT GAUGE EMPTY AXLE MEASURE /--- IGNITION TIMING ---/ #1 #2 RPM GEAR /----- % CO -----/ LEFT RIGHT COMB IDLE RPM GEAR SOAK PERIOD MEASURED COASTDOWN TIME

/- AMBIENT TEST CONDITIONS - /

BARO WFT DRY CVS
"HG BULB HULR UNITS UNIT
28.90 53.0 84.5 U 200

TEST DATE 11-8-79 17 0220 DYN0 SITE 17 0220 ACTUAL INERTIA INDICATED DYNO H.P. 14.3 DVU H.P. 12943.0 TIME PRESSURE 45.00 NOX FACTOR 0.9416 RELATIVE HUMIDITY 33.9 ALDEHYDES

BAG 1 3.590 MILES 5.778 KM VMIX= 2727.0 CU.FT. DILUTION FACTOR = 9.303
SITE #A216 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS
RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM AUX. FIELD1 AUX. FIELD2 AUX. CODE
HC-FID 15 58.9 88.45 15 3.0 4.48 84.46 PPM 3.76 1.048 0.651
NOX-CHEM 15 40.0 45.31 15 0.0 0.0 45.31 PPM 6.30 1.755 1.091
CO2 23 60.3 1.361 23 1.6 0.031 1.334 % 1884.71 524.989 326.213
CO 19 71.7 701.81 19 0.0 0.0 701.81 PPM 63.10 17.576 10.921
MPG 16.0 KPL 6.78 L/100KM 14.7

BAG 2 3.910 MILES 6.293 KM VMIX= 4665.0 CU.FT. DILUTION FACTOR = 13.344
SITE #A216 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS
RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM AUX. FIELD1 AUX. FIELD2 AUX. CODE
HC-FID 14 55.8 41.62 14 5.9 4.35 37.60 PPM 2.86 0.733 0.455
NOX-CHEM 15 49.3 24.84 15 0.0 0.0 24.84 PPM 5.91 1.512 0.939
CO2 23 45.0 0.973 23 1.7 0.033 0.943 % 2278.13 582.642 362.037
CO 18 55.3 271.93 18 0.0 0.0 271.93 PPM 41.82 10.697 6.647
MPG 14.7 KPL 6.27 L/100KM 16.0

COMMENTS: PASSMASTER FELD TESTING
#7 LA4 DEVICE ON - A/C ON COLD ROOM AT 85 DEG. F

MFR.	VER-	MFR.	ALT.	EQUIVALENT	ACTUAL	OVER-	/----- TEST TYPE -----/
CODE	SION EVAP	REP. RUN. RETEST	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
40	4J47A9H123351	INIT. CHG. CODE	METH.	WEIGHT	H.P.	CODE	/----- TEST PROCEDURE -----/
	0			3500			HWFE

PREP DATE	CURB	DRIVE	AXLE	AXLE	/--- IGNITION TIMING ---/	/----- % CO -----/	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	GAUGE	MEASURE	#1 #2 RPM GEAR	LEFT RIGHT COMB	RPM	PERIOD	COASTDOWN
			EMPTY						TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNIT
28.88	61.5	74.3	F 27C

TEST DATE	DYNO	ACTUAL	INDICATED	DYNO	TIME	NOX	RELATIVE	ALDEHYDES
11- 8-79	15	0207	3500	4.7	14885.0	45.00	0.9463	48.2

BAG 1	10.327	MILES	16.620	KM	24078.	ROLL	REVS.	VMIX=	3954.0	CU.FT.	DILUTION FACTOR =	6.524	
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX.		AUX.	AUX.	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1	FIELD2	CODE
HC-FID	14	43.0	32.03	14	3.9	2.86	29.60 PPM	1.93	0.186	0.116			
NOX-CHEM	17	46.1	116.67	17	0.0	0.0	116.67 PPM	23.82	2.307	1.433	MPG	KPL	L/100KM
CO2	23	73.4	2.014	23	2.0	0.042	1.979 %	4084.23	395.493	245.748	22.0	9.35	10.7
CO	18	74.2	366.72	18	0.0	0.0	366.72 PPM	48.17	4.664	2.898			

WEIGHTED VALUES	HC	CO	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.19	4.7	395.	2.31	22.0	9.3	10.7	
BEFORE ROUNDING	0.1864	4.664	395.49	2.3067	22.0059	9.3363	10.7108	
GRAMS/KM	0.116	2.90	246.	1.43	22.0	9.4	10.7	
BEFORE ROUNDING	0.11587	2.8983	245.74	1.4333	21.9929	9.3501	10.6950	
					UNWEIGHTED FTP	22.0	9.4	10.7
					21.9929	9.3501	10.6949	

COMMENTS: DEVICE OFF. A/C ON FULL

MFR. VER- MFR. ALT. EQUIVALENT ACTUAL OVER- /----- TEST TYPE -----/
 GDE VEHICLE I.D. SION EVAP INIT. CHG. CODE ACHP METH. H.P. TEST DYNQ TRANS. DRIVE EXPERIMENTAL
 40 4J47A9H123351 0 4 3500 H.P. H.P. CONFIG. CODE /----- TEST PROCEDURE -----/
 CVS 75-LATER

PREP DATE CUBB DRIVE AXLE AXLE /--- IGNITION TIMING ---/ /----- % CO -----/ IDLE MEASURED
 WEIGHT WEIGHT GAUGE MEASURE #1 #2 RPM GEAR LEFT RIGHT COMB RPM GEAR PERIOD COASTDOWN
 EMPTY TIME

/- AMBIENT TEST CONDITIONS - /

BARO WET DRY CVS
 "HG BULB BULB UNITS UNIT
 28.86 61.5 73.5 F 27C

ACTUAL INERTIA INDICATED DVU TIME NOX RELATIVE
 TEST DATE HP. SITE SETTING DYNQ H.P. H.P. ODOM. PRESSURE FACTOR HUMIDITY ALDEHYDES
 11- 8-79 14 D207 3500 9.7 14874.6 45.00 0.9522 50.6

BAG 1 3.561 MILES 5.731 KM 8303. ROLL REVS. VMIX= 2762.0 CU.FT. DILUTION FACTOR = 8.387
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM FIELD1 FIELD2 CODE
 HC-FID 16 74.0 222.22 16 0.9 2.70 219.84 PPM 9.92 2.784 1.730
 NOX-CHEM 16 72.7 71.44 16 0.5 0.51 71.42 PPM 10.17 2.857 1.775
 CO2 23 54.8 1.398 23 2.0 0.042 1.361 % 1948.04 547.030 339.909
 CO 20 75.6 1771.60 20 0.3 5.74 1766.54 PPM 160.87 45.173 28.069
 MPG KPL L/100KM
 14.1 6.01 16.6

BAG 2 3.836 MILES 6.173 KM 8944. ROLL REVS. VMIX= 4722.0 CU.FT. DILUTION FACTOR = 13.867
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM FIELD1 FIELD2 CODE
 HC-FID 14 47.0 35.04 14 4.0 2.44 32.32 PPM 2.49 0.650 0.404
 NOX-CHEM 15 35.1 17.52 15 0.0 0.0 17.82 PPM 4.34 1.131 0.703
 CO2 23 39.0 0.737 23 1.9 0.040 0.900 % 2200.79 573.714 356.490
 CO 18 53.8 262.46 17 0.0 0.0 262.46 PPM 40.86 10.652 6.619
 MPG KPL L/100KM
 15.0 6.36 15.7

BAG 3 3.530 MILES 5.681 KM 8230. ROLL REVS. VMIX= 2759.0 CU.FT. DILUTION FACTOR = 10.156
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM FIELD1 FIELD2 CODE
 HC-FID 14 71.8 53.80 14 3.7 2.72 51.35 PPM 2.31 0.655 0.407
 NOX-CHEM 16 56.1 55.37 15 0.1 0.05 55.32 PPM 7.87 2.230 1.386
 CO2 23 50.7 1.273 23 1.8 0.038 1.239 % 1771.47 501.862 311.842
 CO 19 44.0 406.93 19 0.0 0.0 406.93 PPM 37.02 10.487 6.516
 MPG KPL L/100KM
 17.0 7.24 13.8

WEIGHTED VALUES HC CO CO2 NOX
 GRAMS/MILE 1.09 17.4 549. 1.79
 BEFORE ROUNDING 1.0931 17.753 548.56 1.7885
 GRAMS/KM 0.679 11.03 341. 1.11
 BEFORE ROUNDING 0.67924 11.0312 340.86 1.1113
 WEIGHTED VALUES MPG KPL L/100KM
 15.3 6.5 15.4
 15.2785 6.4987 15.3875
 72-74 FTP 14.6 6.2 16.1
 14.5676 6.1933 16.1463
 UNWEIGHTED FTP 15.3 6.5 15.4
 15.2861 6.4988 15.3873

COMMENTS: DEVICE OFF, A/C ON FULL

6252 0

DYNQ SITE:D207 TEST # 80-0449

MFP.	VER-	MFP.	ALT.	EQUIVALENT	ACTUAL	OVER-	/----- TEST TYPE -----/
CODE	SION	REP. RUN. RETEST	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
40	0	INIT. CHG. CODE ACHP	METH.	WEIGHT	H.P.	CODE	/----- TEST PROCEDURE -----/
40	0			3500			HWFE

PREP DATE	CURB	DRIVE	AXLE	AXLE	/--- IGNITION TIMING ---/	/----- % CO -----/	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	GAUGE	MEASURE	#1 #2 RPM GEAR	LEFT RIGHT COMB	RPM	GEAR PERIOD	COASTDOWN
			EMPTY						TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DWY	CVS
"HG	BULB	BULB UNITS	UNIT
29.23	61.3	74.4 F	270

TEST DATE	DYNO	ACTUAL	INDICATED	DYNO	TIME	NOX	RELATIVE	
11- 7-79	14	SETTING	DYNO H.P.	H.P.	000M.	PRESSURE	FACTOR	ALDEHYDES
	14	3500	9.7		14MS6.0	45.00	0.9375	47.0

BAG 1	10.187 MILES	16.394 KM	23/51	POLL REVS.	VMIX=	4117.0 CU.FT.	DILUTION FACTOR =	7.854
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS				
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.
HC-FID	14	20.7	15.31	14	3.4	2.79	12.87 PPM	0.87
NOX-CHEM	16	64.3	63.47	16	0.1	0.10	63.34 PPM	13.25
CO2	23	64.2	1.699	23	1.7	0.040	1.664 *	3550.33
CO	17	22.4	54.51	17	0.0	0.0	54.51 PPM	7.40

WEIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.08	0.7	349.	1.30	25.3	10.8	9.3
BEFORE ROUNDING	0.0849	0.726	348.52	1.3006	25.3119	10.7525	9.3001
GRAMS/KM	0.053	0.45	217.	0.81	25.4	10.8	9.3
BEFORE ROUNDING	0.05278	0.4513	216.56	0.8082	25.3538	10.7790	9.2772
					25.4	10.8	9.3
					25.3538	10.7790	9.2772

COMMENTS: PASSMASTER BASELINE

39 of 53

FR.	VEH-	MFR.	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE
JDE	SION	REP.	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
40	EVAP	INIT.	METH.	WEIGHT	H.P.	CODE	TEST PROCEDURE
40	0	CHG.		3500			CVS 75-LATER
4J47A9H123351	N	CODE					

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION #1	TIMING #2	RPM	GEAR	% CO LEFT	% CO RIGHT	COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	-------------	-------------------	-------------	--------------	-------------	-----------	-----	------	-----------	------------	------	----------	------	-------------	-------------------------

/- AMBIENT TEST CONDITIONS - /

HARD	WET	DRY	CVS
"HG"	BULB	BULB UNITS	UNIT
29.26	61.0	73.9	F 270

TEST DATE	DYNO	INERTIA	INDICATED	DVO	TIME	NOX	RELATIVE	ALDEHYDES
11-7-79	12	0207	3500	9.7	14836.0	45.00	0.9349	47.4

BAG 1	3.578 MILES	5.758 KM	8342	ROLL REVS.	VMIX= 2834.0 CU.FT.	DILUTION FACTOR = 10.054							
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE						
HC-FID	RANGE 16	METER 68.2	CONC. 204.84	RANGE 16	METER 0.9	CONC. 2.70	CONCENTRATIONS 202.40 PPM	GMS. 9.37	GMS/MI 2.618	GMS/KM 1.627	MPG 16.7	KPL 7.11	L/100KM 14.1
NOX-CHEM	15	91.6	46.37	15	0.1	0.05	46.33 PPM	6.65	1.858	1.155			
CO2	23	48.2	1.199	23	2.1	0.044	1.159 %	1702.08	475.728	295.604			
CU	20	52.1	1133.90	20	0.3	5.74	1128.73 PPM	105.46	29.477	18.316			

BAG 2	3.840 MILES	6.180 KM	8954	ROLL REVS.	VMIX= 4805.0 CU.FT.	DILUTION FACTOR = 17.733							
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE						
HC-FID	RANGE 14	METER 24.2	CONC. 20.91	RANGE 14	METER 4.2	CONC. 3.09	CONCENTRATIONS 18.00 PPM	GMS. 1.41	GMS/MI 0.368	GMS/KM 0.229	MPG 19.0	KPL 8.08	L/100KM 12.4
NOX-CHEM	14	44.6	11.24	14	0.1	0.03	11.25 PPM	2.74	0.713	0.443			
CO2	23	31.9	0.746	23	1.8	0.038	0.710 %	1768.00	460.378	286.066			
CU	17	31.8	77.71	17	0.0	0.0	77.71 PPM	12.31	3.206	1.592			

BAG 3	3.569 MILES	5.743 KM	8321	ROLL REVS.	VMIX= 2814.0 CU.FT.	DILUTION FACTOR = 12.183							
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE						
HC-FID	RANGE 14	METER 47.1	CONC. 35.12	RANGE 14	METER 4.2	CONC. 3.09	CONCENTRATIONS 32.29 PPM	GMS. 1.48	GMS/MI 0.416	GMS/KM 0.258	MPG 20.4	KPL 8.67	L/100KM 11.5
NOX-CHEM	15	77.1	38.98	15	0.1	0.03	38.95 PPM	5.55	1.555	0.966			
CO2	23	44.3	1.086	23	1.8	0.038	1.051 %	1532.14	429.310	266.761			
CU	17	44.2	108.57	17	0.0	0.0	108.57 PPM	10.07	2.822	1.754			

WEIGHTED VALUES	HC	CU	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.85	8.5	455.	1.18	18.8	18.8	8.0	12.5
BEFORE ROUNDING	0.8476	8.548	455.03	1.1816	18.8261	18.8261	7.9951	12.5075
GRAMS/KM	0.527	5.31	283.	0.73	72-74 FTP	17.8	7.6	13.2
BEFORE ROUNDING	0.52664	5.3120	282.74	0.7342	17.8395	17.8395	7.5843	13.1850
					UNWEIGHTED FTP	18.6	7.9	12.6
						18.5958	7.9059	12.6487

COMMENTS: BAG 2 IS 3 SECONDS SHORT
PASSMASTER BASELINE

MFR.	VER-	MFR.	ALT.	EQUIVALENT	ACTUAL	OVER-	/----- TEST TYPE -----/
ODE	SION	REP.	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
40	EVAP	INIT.	METH.	WEIGHT	H.P.	CODE	/----- TEST PROCEDURE -----/
4J47A9H123351	0	N		3500	12.2		CVS 75-LATER

PREP DATE	CURB	DRIVE	AXLE	AXLE	/--- IGNITION TIMING ---/	/----- % CO -----/	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	MEASURE	MEASURE	#1 #2 RPM GEAR	LEFT RIGHT COMB	RPM GEAR PERIOD	COASTDOWN	TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNIT
28.87	61.0	73.0	F 27C

TEST DATE	DYNO	ACTUAL	INDICATED	DVU	TIME	NOX	RELATIVE	ALDEHYDES
11-15-79	14	SETTING	DYNO H.P.	H.P.	ODOM.	PRESSURE	HUMIDITY	
	0207	3500	9.7		14912.9	45.00	0.9458	50.2

BAG 1	3.625 MILES	5.834 KM	8452.	ROLL REVS.	VMIX= 2802.0 CU.FT.	DILUTION FACTOR = 8.763			
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI
HC-FID	16	54.3	163.13	16	1.2	3.60	159.94 PPM	7.32	2.019
NOX-CHEM	16	60.3	54.51	16	0.2	0.20	59.33 PPM	8.52	2.349
CO2	23	54.6	1.342	23	2.1	0.044	1.353 %	1964.24	541.857
CO	20	55.0	1207.46	20	0.3	5.74	1202.37 PPM	111.08	30.642

BAG 2	3.874 MILES	6.235 KM	9033.	ROLL REVS.	VMIX= 4737.0 CU.FT.	DILUTION FACTOR = 13.845			
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI
HC-FID	14	30.4	22.93	14	4.4	3.23	19.93 PPM	1.54	0.398
NOX-CHEM	15	33.0	16.76	15	0.1	0.05	16.71 PPM	4.06	1.047
CO2	23	39.5	0.950	23	2.1	0.044	0.909 %	2232.06	576.135
CO	18	31.6	152.22	18	0.0	0.0	152.22 PPM	23.77	6.136

BAG 3	3.622 MILES	5.830 KM	8446.	ROLL REVS.	VMIX= 2742.0 CU.FT.	DILUTION FACTOR = 10.205			
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI
HC-FID	14	42.5	31.65	14	4.0	2.94	29.00 PPM	1.32	0.364
NOX-CHEM	16	52.0	51.34	15	0.0	0.0	51.34 PPM	7.32	2.020
CO2	23	51.5	1.247	23	2.0	0.042	1.260 %	1815.45	501.168
CO	17	51.0	125.60	17	0.0	0.0	125.60 PPM	11.52	3.180

WEIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.73	10.4	548.	1.59	15.6	6.6	15.1
BEFORE ROUNDING	0.7254	10.415	548.36	1.5854	15.6496	6.6441	15.0508
GRAMS/KM	0.451	6.47	341.	0.99	15.0	6.4	15.7
BEFORE ROUNDING	0.45076	6.4720	340.73	0.9851	14.9979	6.3762	15.6831
					UNWEIGHTED FTP	15.7	15.0
						6.6864	14.9556

COMMENTS: WITH PASSMASTER - DEVICE ON. A/C ON Vacuum hooked to EGR vacuum line.

MFR.	VEHICLE I.D.	VER-	MFR.	RETEST	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE
ODE		SION	REP.	CHG.	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
40	4J47A9H123351	0	INIT.	ACHP	METH.	WEIGHT	H.P.	CODE	TEST PROCEDURE
		N				3500	12.2		HWFE

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION #1	TIMING #2	RPM	GEAR	% CO LEFT	% CO RIGHT	COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	-------------	-------------------	-------------	--------------	-------------	-----------	-----	------	-----------	------------	------	----------	------	-------------	-------------------------

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNIT
28.91	62.4	74.5	F 27C

TEST DATE	HR.	DYNO SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DVU H.P.	ODOM.	TIRE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
11-15-79	16	0207	3500	9.7		14933.8	45.00	0.9627	50.8	

BAG 1	10.317 MILES	16.604 KM	24055. ROLL REVS.	VMIX=	4017.0 CU.FT.	DILUTION FACTOR =	6.760
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS			
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS
HC-FID	14	23.5	17.40	14	5.9	4.34	13.70 PPM
NOX-CHEM	17	43.9	111.14	16	0.0	0.0	111.14 PPM
CO2	23	72.2	1.972	23	2.0	0.042	1.936 %
CO	17	35.5	86.89	17	0.0	0.0	86.89 PPM
							GMS. GMS/MI GMS/KM
							0.90 0.087 0.054
							23.28 2.256 1.402
							4029.62 390.578 242.694
							11.51 1.115 0.693
							AUX. AUX. AUX.
							FIELD1 FIELD2 CODE
							MPG KPL L/100KM
							22.6 9.60 10.4

WEIGHTED VALUES	HC	CO	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.09	1.1	391.	2.26		22.6	9.6	10.4
BEFORE ROUNDING	0.0871	1.115	390.57	2.2561		22.5644	9.5912	10.4261
GRAMS/KM	0.054	0.69	243.	1.40	72-74 FTP	22.6	9.6	10.4
BEFORE ROUNDING	0.05412	0.6930	242.69	1.4018	UNWEIGHTED FTP	22.5982	9.6075	10.4085
						22.6	9.6	10.4
						22.5982	9.6075	10.4085

COMMENTS: WITH PASSMASTER - DEVICE ON, A/C ON vacuum hooked to EGR vacuum line.

MFR.	VER-	MFR.	REP.	REV.	RETEST	ALT.	EQU.	VALENT	ACTUAL	OVER-	TEST TYPE
CODE	VEHICLE I.D.	SIGN	EVAP	INIT.	CHG.	CODE	ACHP	METH.	TEST	DYNO	EXPERIMENTAL
020	LH41C5H290359	0	N						WEIGHT	H.P.	TEST PROCEDURE
									3500	11.2	2 BAG LA-4

PREP DATE	CURR	DRIVE	AXLE	AXLE	IGNITION	TIMING	% CO	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	GAUGE	MEASURE	#1	#2	LEFT	RPM	GEAR	COASTDOWN
			EMPTY				RIGHT		PERIOD	TIME

/- AMBIENT TEST CONDITIONS - /

BARD	WET	DRY	CVS
"HG	BULB	BULB	UNIT
29.10	60.0	75.0	20C

TEST DATE	HR.	SITE	ACTUAL	INDICATED	UVU	TIRE	NOX	RELATIVE	ALDEHYDES
11-27-79	09	0220	SETTING	UYNO H.P.	H.P.	ODOM.	PRESSURE	HUMIDITY	
			3500	11.2		21851.6	45.00	1.0210	59.6

BAG 1	3.590 MILES	5.778 KM	VMIX= 2772.0 CU.FT.	DILUTION FACTOR = 11.181									
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX.				
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1	FIELD2	AUX.
HC-FID	14	55.1	43.43	14	5.3	3.90	39.88 PPM	1.81	0.503	0.312			
NOX-CHEM	16	42.7	43.13	16	0.9	0.92	42.29 PPM	6.48	1.806	1.122	MPG	KPL	L/100KM
CO2	23	48.0	1.143	23	2.0	0.042	1.155 %	1658.51	461.980	287.061	19.1	8.13	12.3
CO	17	4.5	10.45	17	0.2	0.48	10.42 PPM	0.95	0.265	0.165			

BAG 2	3.910 MILES	6.293 KM	VMIX= 4722.0 CU.FT.	DILUTION FACTOR = 14.647									
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS		AUX.				
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	FIELD1	FIELD2	AUX.
HC-FID	14	37.8	28.11	14	5.3	3.90	24.48 PPM	1.89	0.483	0.300			
NOX-CHEM	16	18.1	18.38	16	0.2	0.20	18.14 PPM	4.75	1.215	0.755	MPG	KPL	L/100KM
CO2	23	38.1	0.912	23	2.1	0.044	0.871 %	2130.28	544.829	338.541	16.2	6.90	14.5
CO	17	1.0	2.41	17	0.0	0.0	2.41 PPM	0.38	0.096	0.060			

WEIGHTED VALUES	HC	CO	CO2	NOX
GRAMS/MILE	0.492	0.177	505.	1.50
BEFORE ROUNDING	.4424	.1770	505.2	1.499
GRAMS/KM	0.306	0.110	314.	0.931
BEFORE ROUNDING	.3060	.1100	313.9	.9305

WEIGHTED VALUES	MPG	KPL	L/100KM
	17.5	7.4	13.4
	17.5050	7.4372	13.4458
72-74 FTP	17.5	7.4	13.4
	17.4990	7.4396	13.4415
UNWEIGHTED FTP	17.5	7.4	13.4
	17.4990	7.4396	13.4415

COMMENTS: GREEN DART 75 DEGREES COLD ROOM
PASSMASTER TESTING
BASELINE LA4 NO A/C OR DEVICE

COMMENTS: GREEN DART 75 DEGREES COLD ROOM
PASSMASTER TESTING
BASELINE

WFR.	VER-	WFR.	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE
CODE	VEHICLE I.D.	REP. H.P.	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
020	LM41CSB290359	SIOM EVAP INIT. CHG. CODE	METH.	WEIGHT	H.P.	CONFG.	TEST PROCEDURE
	0	N		3500	11.2		2 BAG LA-4

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE MEASURE	AXLE MEASURE	IGNITION #1	TIMING #2	% CO LEFT	% CO RIGHT	IDLE RPM	SOAK PERIOD	MEASURED COASTDOWN TIME
-----------	-------------	-------------------	---------------	--------------	-------------	-----------	-----------	------------	----------	-------------	-------------------------

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
29.12	60.0	75.0	200

TEST DATE	DYNO	INERTIA	INDICATED	DYNO	TIME	NOX	RELATIVE	ALDEHYDES
11-27-79	10	0220	3500	11.2	21866.4	45.00	1.0207	59.6

BAG 1	3.590 MILES	5.778 KM	VMIX= 2429.0 CU.FT.	DILUTION FACTOR = 10.581									
SITE #4215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS									
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FID	14	49.1	36.63	14	5.3	3.90	33.10 PPM	1.53	0.426	0.265			
NOX-CHEM	16	48.9	44.33	16	0.2	0.20	49.14 PPM	7.69	2.141	1.330	MPG	KPL	L/100KM
CO2	23	50.3	1.251	23	2.1	0.044	1.221 %	1790.21	498.667	309.657	17.7	7.54	13.3
CO	17	5.9	14.25	17	0.1	0.24	14.03 PPM	1.31	0.364	0.226			

BAG 2	3.910 MILES	6.243 KM	VMIX= 4683.0 CU.FT.	DILUTION FACTOR = 13.389									
SITE #4215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS									
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FID	14	31.0	23.01	14	5.0	4.12	19.20 PPM	1.47	0.375	0.233			
NOX-CHEM	16	22.4	23.23	16	0.3	0.31	22.94 PPM	5.94	1.519	0.944	MPG	KPL	L/100KM
CO2	23	41.2	0.478	23	2.2	0.046	0.455 %	2316.98	592.577	368.210	14.9	6.35	15.8
CO	17	3.3	7.95	17	0.0	0.0	7.96 PPM	1.23	0.314	0.195			

WEIGHTED VALUES	HC	CO	CO2	NOX
GRAMS/MILE	0.400	0.334	54.6	1.82
BEFORE ROUNDING	.3996	.3353	547.6	1.817
GRAMS/KM	0.248	0.210	340.	1.13
BEFORE ROUNDING	.2483	.2162	340.3	1.129

WEIGHTED VALUES	MPG	KPL	L/100KM
	16.1	6.9	14.6
	16.1372	6.8709	14.5539
72-74 FTP	16.1	6.9	14.6
	16.1482	6.8653	14.5659
UNWEIGHTED FTP	16.1	6.9	14.6
	16.1482	6.8653	14.5659

COMMENTS: GREEN HART 75 DEGREE COLD ROOM
PASSMASTER TESTING
A/C NO DEVICE ENGINE STALLED ON START (NOTE HIGH VMIX BAG 1)

45 of 53

MFR. VER- MFR. ALI. EQUIVALENT ACTUAL OVER- /----- TEST TYPE -----/
 CODE VEHICLE I.D. SION EVAP INIT. CHG. CODE ACHP M.P. TEST DYN0 TRANS. DRIVE EXPERIMENTAL
 020 LH41CSB290359 0 N 3500 11.2 CONFG. CODE /----- TEST PROCEDURE -----/
 2 BAG LA-4

DRIVE MEASURED
 PREP DATE CURB AXLE AXLE /--- IGNITION TIMING ---/ /----- % CO -----/ IDLE SOAK MEASURED
 WEIGHT WEIGHT GAUGE MEASURE #1 #2 RPM GEAR LEFT RIGHT COMB RPM GEAR PERIOD COASTDOWN
 EMPTY TIME

/- AMBIENT TEST CONDITIONS - /

BARO WET DRY CVS
 "HG BULB BULB UNITS UNIT
 29.11 60.0 75.0 U 26.0

ACTUAL
 TEST DATE HR. SITE DYN0 INERTIA INDICATED DYU TIME NOX RELATIVE
 11-27-79 11 0220 3500 11.2 21873.5 45.00 1.0209 59.6 ALDEHYDES

BAG 1 3.590 MILES 5.778 KM VMIX= 2792.0 CU.FT. DILUTION FACTOR = 10.660
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM FIELD1 FIELD2 CODE
 HC-FID 14 52.7 39.35 14 0.2 4.56 35.22 PPM 1.61 0.447 0.278
 NOX-CHEM 16 47.7 48.13 16 0.3 0.31 47.85 PPM 7.34 2.058 1.278
 CO2 23 50.0 1.252 23 2.0 0.042 1.214 % 1756.54 489.288 304.030
 CO 17 3.2 7.72 17 0.2 0.48 7.28 PPM 0.67 0.187 0.116
 MPG KPL L/100KM
 18.1 7.68 13.0

BAG 2 3.910 MILES 6.243 KM VMIX= 4684.0 CU.FT. DILUTION FACTOR = 13.587
 SITE #A215 EXHAUST SAMPLE BACKGROUND SAMPLE CORRECTED MASS EMISSIONS AUX. AUX. AUX.
 RANGE METER CONC. RANGE METER CONC. CONCENTRATIONS GMS. GMS/MI GMS/KM FIELD1 FIELD2 CODE
 HC-FID 14 31.0 23.01 14 0.4 4.26 19.06 PPM 1.46 0.373 0.232
 NOX-CHEM 16 24.4 24.74 16 0.4 0.41 24.36 PPM 6.31 1.614 1.003
 CO2 23 40.7 0.944 23 2.0 0.046 0.941 % 2283.42 583.994 362.877
 CO 17 0.9 2.17 17 0.3 0.72 1.50 PPM 0.23 0.059 0.037
 MPG KPL L/100KM
 15.2 6.45 15.5

WEIGHTED VALUES HC CO CO2 NOX
 GRAMS/MILE 0.404 0.120 539. 1.83
 BEFORE ROUNDING .4084 .1202 538.7 1.826
 GRAMS/KM 0.254 0.744E-01 335. 1.13
 BEFORE ROUNDING .2538 .7444E-01 334.7 1.135

WEIGHTED VALUES MPG KPL L/100KM
 16.4 7.0 14.3
 16.4154 6.9771 14.3324
 72-74 FTP 16.4 7.0 14.3
 16.4256 6.9832 14.3199
 UNWEIGHTED FTP 16.4 7.0 14.3
 16.4256 6.9832 14.3199

COMMENTS: GREEN DART 75 DEGREES COLD ROOM
 PASSMASTER TESTING
 A/C NO DEVICE CAR STALLED ON START (HIGH VMIX BAG 1)

MFR.	VEHICLE I.D.	VPR-	MFR.	REP. RUN.	TEST	ALT.	EQUIVALENT	ACTUAL	TRANS.	OVER-	TEST TYPE
CODE		SIGN EVAP	INIT.	CHG.	CODE	ACHP	TEST	DYNO	CONF.	DRIVE	EXPERIMENTAL
020	LH41C54290359	0					WEIGHT	H.P.		CODE	TEST PROCEDURE
							3500	11.2			2 BAG LA-4

PREP DATE	CURR	AXLE	AXLE	IGNITION	TIMING	% CO	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	MEASURE	#1	#2	LEFT	RPM	PERIOD	COASTDOWN
			EMPTY			RIGHT			TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
WIND	BULB	BULB	UNIT
29.10	60.0	75.0	200

TEST DATE	HP.	SITE	ACTUAL	INDICATED	DYNO	TIME	NOX	RELATIVE	ALDEHYDES
11-27-79	11	0220	3500	11.2	21881.0	45.00	1.0210	59.6	

BAG 1	3.590 MILES	5.775 KM	VMIA= 2747.0 CU.FT.	DILUTION FACTOR = 10.903						
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.			
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI	
HC-FID	14	73.0	54.71	14	0.0	4.41	50.71 PPM	2.31	0.643	
NOX-CHEM	16	46.7	47.13	16	0.2	0.20	46.94 PPM	7.23	2.015	
CO2	23	49.0	1.223	23	2.0	0.042	1.184 %	1710.29	476.404	
CO	17	4.0	4.65	17	0.0	0.0	4.65 PPM	0.89	0.247	
									GMS/KM	
										MPG
										KPL
										L/100KM

BAG 2	3.910 MILES	6.293 KM	VMIA= 4685.0 CU.FT.	DILUTION FACTOR = 14.020						
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.			
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI	
HC-FID	14	33.0	24.51	14	5.7	4.19	20.62 PPM	1.58	0.403	
NOX-CHEM	16	25.1	25.45	16	0.2	0.20	25.26 PPM	6.54	1.673	
CO2	23	34.6	0.453	23	2.0	0.042	0.914 %	2218.95	567.506	
CO	17	0.8	1.93	17	0.0	0.0	1.93 PPM	0.30	0.076	
									GMS/KM	
										MPG
										KPL
										L/100KM

WEIGHTED VALUES	HC	CO	CO2	NOX	WEIGHTED VALUES	MPG	KPL	L/100KM
GRAMS/MILE	0.518	0.154	324.0	1.04		16.9	7.2	14.0
BEFORE ROUNDING	0.5180	0.1579	323.9	1.037		16.8708	7.1637	13.9591
GRAMS/KM	0.322	0.941E-01	325.0	1.14	72-74 FTP	16.9	7.2	13.9
BEFORE ROUNDING	0.3219	0.9411E-01	325.0	1.141	UNWEIGHTED FTP	16.9	7.2	13.9
						16.8741	7.1739	13.9393

COMMENTS: GREEN DART 75 DEGREES COLD ROOM
PASSMASTER TESTING
A/C WITH DEVICE (CAR STALLED ON START)

WFR.	VER-	MFR.	REP.	HUN.	RETEST	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE			
CODE	VEHICLE I.D.	SIUN	EVAP	INIT.	CHG.	CODE	ACHP	METH.	TEST	DYNO	TRANS.	DRIVE	EXPERIMENTAL
020	LM41CSR290359	0	N						3500	11.2	CONF.	CODE	2 BAG LA-4

PREP DATE	CURR	DRIVE	AXLE	AXLE	IGNITION	TIMING	% CO	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	GAUGE	MEASURE	#1	#2	RPM	GEAR	PERIOD	COASTDOWN
			EMPTY							TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DY	CVS
"HG	BULB	HULH	UNIT
29.10	60.0	75.0	D 20C

TEST DATE	HP.	SITE	ACTUAL	INERTIA	INDICATED	DYNO	TIRE	NOX	RELATIVE	ALDEHYDES
11-27-79	12	0220	SETTING	DYNO	H.P.	ODOM.	PRESSURE	FACTOR	HUMIDITY	
			3500		11.2	21888.	45.00	1.0210	59.6	

BAG 1	3.590	MILES	5.774	KM	VMIX=	2759.0	CU.FT.	DILUTION FACTOR =	10.771				
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS						
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX.	AUX.	AUX.
HC-FID	14	68.0	50.93	14	5.0	3.68	47.59 PPM	2.14	0.597	0.371	FIELD1	FIELD2	CODE
NOX-CHEM	16	49.4	49.82	16	0.1	0.10	49.73 PPM	7.59	2.113	1.313	MPG	KPL	L/100KM
CO2	23	49.5	1.237	23	1.8	0.038	1.203 %	1719.89	479.077	297.685	18.4	7.83	12.8
CO	17	6.3	15.21	17	0.0	0.0	15.21 PPM	1.38	0.386	0.240			

BAG 2	3.910	MILES	6.293	KM	VMIX=	4680.0	CU.FT.	DILUTION FACTOR =	14.182				
SITE #A215	EXHAUST SAMPLE		BACKGROUND SAMPLE		CORRECTED		MASS EMISSIONS						
	RANGE	METER	CUNC.	RANGE	METER	CUNC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX.	AUX.	AUX.
HC-FID	14	34.2	25.41	14	5.0	3.68	21.99 PPM	1.68	0.430	0.267	FIELD1	FIELD2	CODE
NOX-CHEM	16	27.1	27.46	16	0.0	0.0	27.46 PPM	7.11	1.818	1.129	MPG	KPL	L/100KM
CO2	23	39.2	0.942	23	1.8	0.038	0.907 %	2199.19	562.454	349.492	15.7	6.69	15.8
CO	17	1.0	2.41	17	0.0	0.0	2.41 PPM	0.37	0.095	0.059			

WEIGHTED VALUES	HC	CO	CO2	NOX
GRAMS/MILE	0.510	0.234	523.	1.96
BEFORE ROUNDING	.5100	.2341	522.5	1.959
GRAMS/KM	0.317	0.145	325.	1.22
BEFORE ROUNDING	.3169	.1454	324.7	1.217

WEIGHTED VALUES	MPG	KPL	L/100KM
	16.9	7.2	13.9
	16.8999	7.1844	13.9189
72-74 FTP	16.9	7.2	13.9
	16.9146	7.1911	13.9059
UNWEIGHTED FTP	16.9	7.2	13.9
	16.9146	7.1911	13.9059

COMMENTS: GREEN DAPT 75F COLD ROOM
PASSMASTER TESTING
A/C ON WITH DEVICE

48 of 53

MFR. CODE	VEHICLE I.D.	VER- SION	EVAP	MFR. REP. INIT.	RUN. CHG.	RETEST CODE	ACHP	ALT. H.P. METH.	EQUIVALENT TEST WEIGHT	ACTUAL DYN0 H.P.	TRANS. CONFG.	OVER- DRIVE CODE	TEST TYPE
J20	LM41C58290359	0	N						3500	11.2			EXPERIMENTAL
													TEST PROCEDURE
													2 BAG LA-4

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	IGNITION #1	TIMING #2	RPM	GEAR	% CO LEFT	% CO RIGHT	COMB	IDLE RPM	GEAR	SOAK PERIOD	MEASURED COASTDOWN TIME

/- AMBIENT TEST CONDITIONS - /

BARO "HG	WET BULB	DPT BULB	CVS UNIT
29.00	50.0	100.0	20C

TEST DATE	HR.	DYN0 SITE	ACTUAL INERTIA SETTING	INDICATED DYN0 H.P.	DVU H.P.	ODOM.	TIRE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
12-1-79	12	D220	3500	11.2		22025.7	45.00	0.9143	18.8	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2779.0 CU.FT.	DILUTION FACTOR = 10.653
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS
	RANGE METER CONC.	RANGE METER CONC.	CONCENTRATIONS	GMS. GMS/MI GMS/KM
HC-FID	14 65.1 48.73	14 12.6 9.29	40.31 PPM	1.83 0.510 0.317
NOX-CHEM	16 62.8 63.16	16 0.1 0.10	63.07 PPM	8.68 2.417 1.502
CO2	23 49.6 1.240	23 2.0 0.042	1.202 %	1731.19 482.225 299.641
CO	17 51.2 126.10	17 0.2 0.48	125.66 PPM	11.51 3.207 1.993
				AUX. FIELD1 AUX. FIELD2 AUX. CODE
				MPG KPL L/100KM
				18.1 7.72 13.0

BAG 2	3.910 MILES	6.293 KM	VMIX= 4701.0 CU.FT.	DILUTION FACTOR = 14.217
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS
	RANGE METER CONC.	RANGE METER CONC.	CONCENTRATIONS	GMS. GMS/MI GMS/KM
HC-FID	14 21.2 15.68	14 13.2 9.73	6.63 PPM	0.51 0.130 0.081
NOX-CHEM	16 24.5 24.84	16 0.1 0.10	24.75 PPM	5.76 1.473 0.915
CO2	23 39.0 0.937	23 1.5 0.031	0.907 %	2209.92 565.197 351.197
CO	17 18.1 43.96	17 0.2 0.48	43.51 PPM	6.74 1.725 1.072
				AUX. FIELD1 AUX. FIELD2 AUX. CODE
				MPG KPL L/100KM
				15.6 6.64 15.1

WEIGHTED VALUES	HC	CO	CO2	NOX
GRAMS/MILE	0.312	2.43	525.	1.93
BEFORE ROUNDING	.3118	2.434	525.5	1.925
GRAMS/KM	0.194	1.51	327.	1.20
BEFORE ROUNDING	.1937	1.513	326.5	1.196

WEIGHTED VALUES	MPG	KPL	L/100KM
	16.7	7.1	14.1
	16.7461	7.1026	14.0791
72-74 FTP	16.7	7.1	14.1
	16.7307	7.1129	14.0587
UNWEIGHTED FTP	16.7	7.1	14.1
	16.7307	7.1129	14.0587

COMMENTS: DART BASELINE @ 100 DEGREES F LA-4
NO HUMIDITY CONTROL BAG 1
STALLED AT START

MFR.	VEH-	MFR.	ALT.	EQUIVALENT	ACTUAL	OVER-	/----- TEST TYPE -----/
CODE	VEHICLE I.D.	REP. RUN. RETEST	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
120	LM41C58290359	INIT. CHG. CODE	ACHP METH.	WEIGHT	H.P.	CONF.	/----- TEST PROCEDURE -----/
	0 N			3500	11.2		2 BAG LA-4

PREP DATE	CURB WEIGHT	DRIVE AXLE WEIGHT	GAUGE EMPTY	AXLE MEASURE	/--- IGNITION TIMING ---/	/----- % CO -----/	IDLE RPM	SOAK PERIOD	MEASURED COASTDOWN TIME
					#1 #2 RPM GEAR	LEFT RIGHT COMB			

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
29.00	59.5	100.5 D	20C

TEST DATE	HR.	DYNO SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	OVU H.P.	ODOM.	TIRE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
12- 1-79	12	D220	3500	11.2		22033.0	45.00	1.0154	26.1	

BAG 1	3.590 MILES	5.778 KM	VMIX= 2765.0 CU.FT.	DILUTION FACTOR = 10.713			
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FID	RANGE METER CONC.	RANGE METER CONC.	CONCENTRATIONS	GMS. GMS/MI GMS/KM	MPG	KPL	L/100KM
NOX-CHEM	14 57.7 43.13	14 7.7 5.66	37.99 PPM	1.72 0.478 0.297			
CO2	16 57.5 57.89	16 0.1 0.10	57.80 PPM	8.79 2.448 1.521			
CO	23 49.5 1.237	23 1.9 0.040	1.201 %	1720.91 479.363 297.862	18.3	7.79	12.8
	17 37.3 91.36	17 0.0 0.0	91.36 PPM	8.33 2.320 1.442			

AG 2	3.910 MILES	6.293 KM	VMIX= 4687.0 CU.FT.	DILUTION FACTOR = 14.214			
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FID	RANGE METER CONC.	RANGE METER CONC.	CONCENTRATIONS	GMS. GMS/MI GMS/KM	MPG	KPL	L/100KM
NOX-CHEM	14 16.6 12.26	14 7.3 5.37	7.27 PPM	0.56 0.142 0.088			
CO2	16 24.1 24.44	16 0.3 0.31	24.15 PPM	6.23 1.592 0.989	15.8	6.70	14.9
CO	23 39.0 0.937	23 1.8 0.038	0.901 %	2189.07 559.864 347.884			
	17 20.3 49.35	17 0.5 1.20	48.24 PPM	7.45 1.906 1.185			

WEIGHTED VALUES	MC	CO	CO2	NOX
GRAMS/MILE	0.303	2.10	521.	2.00
BEFORE ROUNDING	.3029	2.104	521.3	2.002
GRAMS/KM	0.188	1.31	324.	1.24
BEFORE ROUNDING	.1882	1.307	323.9	1.244

WEIGHTED VALUES	MPG	KPL	L/100KM
	16.9	7.2	13.9
	16.8911	7.1751	13.9369
72-74 FTP	16.9	7.2	13.9
	16.8802	7.1765	13.9342
UNWEIGHTED FTP	16.9	7.2	13.9
	16.8802	7.1765	13.9342

COMMENTS: DART BASELINE @ 100 DEGREES F LA-4
STALLED ON START

MFR.	VER-	MFR.	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE
CODE	SION	REP. RUN. RETEST	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
VEHICLE I.D.	EVAP	INIT. CHG. CODE ACHP	METH.	WEIGHT	H.P.	CONFG.	TEST PROCEDURE
J20 LM41C5H290359	0 N			3500	11.2		2 BAG LA-4

[illegible]

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
29.00	60.0	102.0	0
			20C

TEST DATE	HR.	DYNO SITE	ACTUAL INERTIA SETTING	INDICATED DYNO H.P.	DVU H.P.	ODOM.	TIRE PRESSURE	NOX FACTOR	RELATIVE HUMIDITY	ALDEHYDES
12-1-79	13	0220	3500	11.2		22040.	45.00	1.0224	25.4	

BAG 1 3.590 MILES 5.778 KM		EXHAUST SAMPLE		BACKGROUND SAMPLE		VMIX= 2753.0 CU.FT. CORRECTED		DILUTION FACTOR = 9.771			MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM						
HC-FID	14	70.3	52.67	14	6.8	5.00	48.18 PPM	2.17	0.603	0.375						
NOX-CHEM	16	70.2	70.49	16	0.3	0.31	70.22 PPM	10.70	2.981	1.853						
CO2	23	53.2	1.349	23	1.9	0.040	1.313 %	1873.19	521.779	324.218						
CO	17	69.0	171.00	17	0.3	0.72	170.35 PPM	15.46	4.307	2.676						
											MPG		KPL		L/100KM	
											16.7		7.11		14.1	

AG 2 3.910 MILES 6.293 KM		EXHAUST SAMPLE		BACKGROUND SAMPLE		VMIX= 4668.0 CU.FT. CORRECTED CONCENTRATIONS		DILUTION FACTOR = 13.175 MASS EMISSIONS			AUX. FIELD1	AUX. FIELD2	AUX. CODE
SITE #A215	RANGE	PETER	CONC.	RANGE	METER	CONC.	GMS.	GMS/M1	GMS/KM				
HC-FID	14	15.0	11.07	14	6.6	4.85	6.58 PPM	0.50	0.128	0.080			
NOX-CHEM	16	36.1	36.51	16	0.4	9.41	36.14 PPM	9.34	2.389	1.484	MPG	KPL	
CO2	23	41.7	1.012	23	1.8	0.038	0.977 %	2362.52	604.224	375.447	14.6	6.21	
CO	17	17.5	42.49	17	0.4	0.96	41.60 PPM	6.40	1.638	1.018		L/100KM	

WEIGHTED VALUES	HC	CO	CO2	NOX
GRAMS/MILE	0.356	2.92	565.	2.67
BEFORE ROUNDING	.3557	2.915	564.8	2.672
GRAMS/KM	0.221	1.81	351.	1.66
BEFORE ROUNDING	.2210	1.811	350.9	1.661

	MPG	KPL	L/100KM
WEIGHTED VALUES	15.5	6.6	15.1
	15.5457	6.6107	15.1269
72-74 FTP	15.6	6.6	15.1
	15.5525	6.6120	15.1238
UNWEIGHTED FTP	15.6	6.6	15.1
	15.5525	6.6120	15.1238

COMMENTS: DART LA-4 A/C ON DEVICE OFF. 100 DEGREES F
PASSMASTER

MFR.	VER-	MFR.	ALT.	EQUIVALENT	ACTUAL	OVER-	/----- TEST TYPE -----/
CODE	SION EVAP	REP. RUN. RETEST	H.P.	TEST	DYNO	DRIVE	EXPERIMENTAL
J20	0	INIT. CHG. CODE	METH.	WEIGHT	H.P.	CODE	/----- TEST PROCEDURE -----/
LM41CS8290359	N			3500	11.2		2 BAG LA-4

PREP DATE	CURB	DRIVE	AXLE	/--- IGNITION TIMING ---/	/----- % CO -----/	IDLE	SOAK	MEASURED
	WEIGHT	AXLE	MEASURE	#1 #2 RPM GEAR	LEFT RIGHT COMB	RPM GEAR PERIOD	COASTDOWN	TIME
		WEIGHT						
		GAUGE						
		EMPTY						

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB UNITS	UNIT
29.00	58.0	100.0	D 20C

TEST DATE	DYNO	ACTUAL	INDICATED	DYNO	TIRE	NOX	RELATIVE	
12-1-79	13	SETTING	DYNO H.P.	H.P.	ODOM.	PRESSURE	FACTOR	HUMIDITY
								ALDEHYDES

BAG 1	3.590 MILES	5.778 KM	VMIX= 2746.0 CU.FT.	DILUTION FACTOR = 9.843				
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.
HC-FID	14	27.0	20.01	14	6.6	4.85	15.65 PPM	0.70
NOX-CHEM	16	68.8	69.10	16	0.3	0.31	68.83 PPM	10.19
CO2	23	53.1	1.346	23	1.9	0.040	1.310 %	1864.03
CO	17	54.5	134.39	17	0.2	0.48	133.96 PPM	12.13
								3.378
								2.099
								0.121
								0.195
								2.839
								1.764
								16.9
								7.18
								13.9

JAG 2	3.910 MILES	6.293 KM	VMIX= 4666.0 CU.FT.	DILUTION FACTOR = 13.349				
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS	AUX.	AUX.	AUX.	
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.
HC-FID	14	13.8	10.18	14	6.5	4.78	5.76 PPM	0.44
NOX-CHEM	16	37.3	37.72	16	0.4	0.41	37.34 PPM	9.40
CO2	23	41.3	1.000	23	1.9	0.040	0.964 %	2329.54
CO	17	9.5	22.98	17	0.2	0.48	22.53 PPM	3.47
								0.887
								0.551
								0.070
								1.493
								1.493
								14.8
								6.31
								15.8

WEIGHTED VALUES	HC	CO	CO2	NOX
GRAMS/MILE	0.152	2.08	559.	2.61
BEFORE ROUNDING	.1521	2.079	559.1	2.611
GRAMS/KM	0.945E-01	1.29	347.	1.62
BEFORE ROUNDING	.9449E-01	1.292	347.4	1.623

WEIGHTED VALUES	MPG	KPL	L/100KM
	15.8	6.7	14.9
	15.7658	6.7094	14.9042
72-74 FTP	15.8	6.7	14.9
	15.7618	6.7010	14.9229
UNWEIGHTED FTP	15.8	6.7	14.9
	15.7618	6.7010	14.9229

COMMENTS: DART LA-4 #4 A/C ON DEVICE OFF 100 DEGREES F-COLD ROOM
PASSMASTER

MFR.	VER-	MFR.	REP.	RUN.	RETEST	ALT.	EQUIVALENT	ACTUAL	OVER-	TEST TYPE
ODE	VEHICLE I.D.	SION	EVAP	INIT.	CHG.	ACHP	TEST	DYNO	DRIVE	EXPERIMENTAL
020	LM41C5H290359	0	N				WEIGHT	H.P.	CONF.	TEST PROCEDURE
							3500	11.2		2 BAG LA-4

PREP DATE	CURB	DRIVE	AXLE	AXLE	IGNITION	TIMING	% CO	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	GAUGE	MEASURE	#1	#2	LEFT	RPM	PERIOD	COASTDOWN
			EMPTY				RIGHT			TIME

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNIT
29.01	58.0	102.0	20C

TEST DATE	HR.	DYNO	INERTIA	INDICATED	DYNO	TIRE	NOX	RELATIVE	ALDEHYDES
		SITE	SETTING	DYNO	H.P.	ODOM.	PRESSURE	FACTORS	HUMIDITY
12-1-79	14	0220	3500	11.2		22055.0	45.00	0.9955	23.7

BAG 1	3.590 MILES	5.778 KM	VMIX= 2743.0 CU.FT.	DILUTION FACTOR = 10.230									
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS									
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FID	14	59.6	44.57	14	6.3	4.63	40.39 PPM	1.81	0.504	0.313			
NOX-CHEM	16	74.8	75.04	16	0.3	0.31	74.76 PPM	11.06	3.080	1.914	MPG	KPL	L/100KM
CO2	23	51.4	1.294	23	1.9	0.040	1.258 %	1788.41	498.163	309.544	17.6	7.48	13.4
CO	17	45.0	110.57	17	0.2	0.48	110.13 PPM	9.96	2.774	1.724			

JAG 2	3.910 MILES	6.293 KM	VMIX= 4633.0 CU.FT.	DILUTION FACTOR = 13.364									
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS									
	RANGE	METER	CONC.	RANGE	METER	CONC.	CONCENTRATIONS	GMS.	GMS/MI	GMS/KM	AUX. FIELD1	AUX. FIELD2	AUX. CODE
HC-FID	14	14.3	10.55	14	6.6	4.85	6.06 PPM	0.46	0.117	0.073			
NOX-CHEM	16	39.0	39.42	16	0.3	0.31	39.14 PPM	9.78	2.500	1.554	MPG	KPL	L/100KM
CO2	23	41.2	0.998	23	1.9	0.040	0.961 %	2306.33	589.855	366.519	15.0	6.37	15.7
CO	17	16.2	39.31	17	0.2	0.48	38.87 PPM	5.94	1.518	0.943			

WEIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.302	2.12	546.	2.78	16.1	6.9	14.6
BEFORE ROUNDING	.3023	2.120	546.0	2.778	16.1228	6.8598	14.5776
GRAMS/KM	0.188	1.32	339.	1.73	16.1	6.9	14.6
BEFORE ROUNDING	.1878	1.317	339.2	1.726	16.1239	6.8549	14.5879
					16.1	6.9	14.6
					16.1239	6.8549	14.5879

COMMENTS: DART A/C. DEVICE ON LA-4 100 DEGREES F
PASSMASTER TESTING

MFR.	VER-	MFR.	REP.	RUN.	RETEST	ALT.	EQUIVALENT	ACTUAL	OVER-	/----- TEST TYPE -----/
ODE	VEHICLE I.D.	SIUN	EVAP	INIT.	CHG.	ACHP	METH.	TEST	DYNO	EXPERIMENTAL
020	LM41C58290359	0	N					WEIGHT	H.P.	CONF.
								3500	11.2	2 BAG LA-4

PREP DATE	CURB	DRIVE	AXLE	AXLE	/--- IGNITION TIMING ---/	/----- % CO -----/	IDLE	SOAK	MEASURED
	WEIGHT	WEIGHT	GAUGE	MEASURE	#1 #2 RPM GEAR	LEFT RIGHT COMB	RPM GEAR PERIOD	COASTDOWN	TIME
			EMPTY						

/- AMBIENT TEST CONDITIONS - /

BARO	WET	DRY	CVS
"HG	BULB	BULB	UNIT
29.02	56.0	100.0	0 20C

TEST DATE	DYNO	HP.	SITE	SETTING	INDICATED	DYNO	H.P.	OVU	000H.	TIRE	NOX	RELATIVE	ALDEHYDES
12-1-79	17	D220		3500	11.2			22062.0		45.00	0.9716	23.4	

JAG 1	3.590 MILES	5.778 KM	VMIX= 2719.0 CU.FT.	DILUTION FACTOR = 10.146
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS
	RANGE METER CONC.	RANGE METER CONC.	CONCENTRATIONS	GMS. GMS/MI GMS/KM
HC-FID	14 62.8 46.99	14 6.4 4.71	42.74 PPM	1.90 0.529 0.329
NOX-CHEM	16 71.4 71.68	16 0.4 0.41	71.31 PPM	10.20 2.842 1.766
CO2	23 51.8 1.306	23 2.0 0.042	1.269 %	1787.15 497.814 309.327
CO	17 39.0 95.59	17 0.2 0.48	95.16 PPM	8.53 2.376 1.477
				AUX. AUX. AUX.
				FIELD1 FIELD2 CODE
				MPG KPL L/100KM
				17.6 7.50 13.3

JAG 2	3.910 MILES	6.293 KM	VMIX= 4651.0 CU.FT.	DILUTION FACTOR = 13.388
SITE #A215	EXHAUST SAMPLE	BACKGROUND SAMPLE	CORRECTED	MASS EMISSIONS
	RANGE METER CONC.	RANGE METER CONC.	CONCENTRATIONS	GMS. GMS/MI GMS/KM
HC-FID	14 13.6 10.03	14 6.5 4.78	5.61 PPM	0.43 0.109 0.068
NOX-CHEM	16 39.9 40.32	16 0.5 0.51	39.85 PPM	9.75 2.495 1.550
CO2	23 41.2 0.998	23 2.0 0.042	0.959 %	2310.57 590.939 367.192
CO	17 9.2 22.25	17 0.1 0.24	22.03 PPM	3.38 0.864 0.537
				AUX. AUX. AUX.
				FIELD1 FIELD2 CODE
				MPG KPL L/100KM
				15.0 6.37 15.7

WEIGHTED VALUES	HC	CO	CO2	NOX	MPG	KPL	L/100KM
GRAMS/MILE	0.310	1.59	546.	2.66	16.1	6.9	14.6
BEFORE ROUNDING	.3098	1.588	546.4	2.661	16.1465	6.8700	14.5559
GRAMS/KM	0.193	0.987	339.	1.65	16.1	6.9	14.6
BEFORE ROUNDING	.1925	.9866	339.5	1.653	16.1360	6.8601	14.5769
					UNWEIGHTED FTP	16.1	6.9
						16.1360	6.8601

COMMENTS: DAPT A/C ON DEVICE ON LA-4 100 DEGREES F
PASSMASTER TESTING

Attachment G
Test Vehicle Description
Chassis model/year/make 1978 Ford Pinto

Engine

Type I-4
bore x stroke 3.781 x 3.126
displacement 2.3 liter
compression ratio 9.0
maximum power @ rpm 88 hp @ 4800 rpm
fuel metering Feedback, electronic
fuel requirement Unleaded, tested with Indolene IHO unleaded

Drive Train

transmission type A
inertia weight 2750 lbs.

Emission Control System EGR
Air Injection
Dual Oxidation Catalyst

Test Vehicle Description
Chassis model year/make-1979 Chrysler LeBaron
Vehicle I.D. FM41G9F150932

Engine

type Otto Spark, V-8
bore x stroke 3.91 x 3.31 in/99.3 x 84.1 mm
displacement 318CID/5211 CC
compression ratio 8.61:1
maximum power @ rpm 145 hp/108 k W
fuel metering 2 Venturi carburetor
fuel requirement Unleaded, tested with Indolene IHO unleaded

Drive Train

transmission type 3 speed lockup automatic
final drive ratio 2.50

Chassis

type 4 door sedan
tire size FR 78 X 15
curb weight 3660 lb/1660 kg.
inertia weight 4000 lb.
passenger capacity 6

Emission Control System

basic type EGR
Oxidation catalyst
Air Injection

Test Vehicle Description
Chassis model year/make-1975 Dodge Dart
Emission Control System-Air Pump, Catalyst EGR

Engine

type Inline 6, 4 cycle
bore x stroke 3.40 x 4.125 in.
displacement 225 CId/3687 cc
compression ratio 8.4:1
fuel metering 1 Venturi, carburetor
fuel requirement Unleaded, tested with Indolene IHO unleaded

Drive Train

transmission type 3 speed automatic
final drive ratio 2.75

Chassis

type 4 door sedan
tire size D78 X 14
inertia weight 3500 lbs.
passenger capacity 6

Emission Control System

basic type Air Pump
Oxidation Catalyst
EGR
Calibrated to 1975 California Standards

Test Vehicle Description
Chassis model year/make-1979 Buick Regal
Vehicle ID 4J47A9H123351

Engine

type Otto Spark, V-6
bore x stroke 3.8 x 3.4 in.
displacement 3.8 liter/231 CID
compression ratio 8.0:1
maximum power @ rpm 115 hp/86 k W @ 4800 rpm
fuel metering 2 Venturi carburetor
fuel requirement Unleaded, tested with Indolene IHO unleaded

Drive Train

transmission type 3 speed automatic
final drive ratio 2.40

Chassis

type 2 Dr. Sedan
tire size P 195/75 R 14
curb weight 3312 lb/1502 kg.
passenger capacity 5

Emission Control System

basic type EGR Oxidation Catalyst
Oxidation Catalyst
Air Injection

United States Patent Office

Patented Aug. 26, 1969

1

3,462,964

AIR CONDITIONER CONTROL MEANS RESPONSIVE TO VEHICLE ENGINE POWER DEMANDS

Ralph K. Haroldson, Dallas, Tex.

(5725 E. 63rd Place S., Tulsa, Okla. 74135)

Filed Sept. 12, 1967, Ser. No. 667,176

Int. Cl. B60h 3/04; H01h 35/34

U.S. Cl. 62-133

12 Claims

ABSTRACT OF THE DISCLOSURE

A system for automatically shutting off an automobile air conditioner if the full power of the automobile engine is needed including a vacuum line connecting the automobile intake manifold with a pressure-responsive switch having a flexible, concave cover, a normally open micro switch with its operating button adjacent the concave cover, and operable by inward movement of the concave cover, a set screw for adjusting the position of the micro switch relative to the concave cover in a horizontal direction and a set screw for adjusting the position of the micro switch relative to the concave cover in a vertical direction, a source of electrical power leading to the pressure-responsive switch, a source of electrical power passing from electrical switch to the operating clutch of an air-conditioning compressor and an operative connection between the clutch and the air conditioner compressor. In an alternate arrangement, an arm is connected to the accelerator and the arm is positioned to compress the concave cover of the switch when the accelerator is approaching the full power position.

Field of the invention

The present invention relates to an auto air conditioner switch. In a more specific aspect, the present invention relates to a simple electrical switch and a system for automatically operating an automobile air conditioner thereby.

The prior art

It is a well-known fact that automobile air conditioners require a substantial portion of the power of the automobile engine for their operation. This power requirement of the air conditioning system is particularly troublesome and dangerous when a high level of performance is necessary. For example, when one is attempting to pass another car, it is extremely important from a safety standpoint that the full power of the engine be available. While a number of complex systems have been provided for speeding up the engine under these circumstances, this does not provide an adequate answer since there is a point at which the engine cannot be speeded up and thus be made to handle both the air-conditioning system and the full power load of the automobile. Secondly, even though the engine might be speeded up to handle both the air conditioner and the full power load of the engine, the operation of a thermostatic switch on the air conditioner can result in sudden changes in the load. Further, while a wide variety of switches have been proposed for this and like use, all such switches appear to be unduly complex and expensive.

Summary of the invention

It is therefore an object of the present invention to provide an improved switch and automatic switching system for an automobile air conditioner which over-

2

comes the problems and deficiencies pointed out above. It is another object of the present invention to provide an improved switch for an auto air-conditioning system. A further object of the present invention is to provide an improved system for shutting off an automobile air-conditioning system when full power of the engine is required for auto operation. Another and further object of the present invention is to provide an improved system for automatically shutting off an auto air conditioner when the engine is operated at a point approaching its full power capacity. Still another object of the present invention is to provide an improved system for automatically shutting off an auto air conditioner in response to an increase in the intake manifold pressure of the engine above a preselected point. Another and further object of the present invention is to provide an improved switch wherein a flexible concave surface forms one exterior wall of the switch. Another and further object of the present invention is to provide an improved switch wherein a flexible, concave element forms one exterior wall of the switch and flexing of this element depresses the plunger of a double-throw, snap-action electrical switch.

Briefly, the present invention involves a system for turning off an auto air conditioner when full power is required for operation of the auto, including means for sensing a predetermined condition of the automobile engine as maximum engine power is approached and switch means responsive to the sensed condition to interrupt the electrical circuit to the air conditioner when said predetermined condition is sensed.

Brief description of the drawings

In accordance with the drawings, FIGURE 1 shows the system of the present invention in schematic form;

FIGURE 2 shows the operation of the switch of the present invention by different actuating means than FIGURE 1;

FIGURE 3 shows one form of the switch of the present invention; and

FIGURE 4 shows another form of the switch of the present invention.

Description of the preferred embodiments

Referring now to the drawings, FIGURE 1 shows an automobile engine 10 having a belt or other appropriate transmitting means operatively connecting the engine to one element of the clutch 14. The other element of the clutch 14 is, in turn, coupled to an air-conditioning compressor 16. Compressor 16, of course, has refrigerant passing to and from the unit through refrigerant lines 18. The continuously rotating element of clutch 14 is electrically actuated by power transmitted from a power source through lines 26 and lines 28. Forming a part of the engine 10 is intake manifold 20. In open communication with intake manifold 20 is section line or vacuum line 22. The other end of vacuum line 22 is connected to pressure-responsive switch means 24. The pressure-responsive switch means 24 is mounted in lines 26 and 28 in a manner such that the switch will make and break the circuit between the source of power and the air conditioner clutch 14.

In the operation of this form of the present invention, the pressure-responsive element of pressure-responsive switch means 24 senses the intake manifold pressure of the engine. When the throttle is opened up to a point near its full capacity, the manifold pressure approaches atmospheric pressure. The pressure-responsive element senses this condition and responds to a preselected pres-

permit movement of the operating element of said switch means toward and away from the flexible wall of said container.

12. A system in accordance with claim 9 wherein the switch means is adjustably mounted on the container to permit movement of the operating element of said switch means laterally with respect to the center of flexure of the flexible wall of said container and to permit movement of said operating element of said switch means toward and away from said flexible wall of said container.

2,107,541	2/10/49	Pat.	62-133 X
2,268,667		dez	62-133
2,929,226	3/18	ker et al.	62-215
3,121,314	2/1964	Koyanagi	62-133

A. HARRY LEVY, Primary Examiner

U.S. Cl. X.R.

62-323; 180-1, 77, 53; 200-61.89, 83

the pressure-responsive switch means, turns the switch off and thereby interrupts the power to the air conditioner clutch 14. Although the manifold pressure remains at this relatively high pressure (near atmospheric) for only a small fraction of the time, this fraction of time occurs when full power of the engine is needed most, such as when attempting to pass another car, etc. When the manifold pressure again drops, this is sensed by the pressure-responsive element of the switch means and this element responds to the lowered pressure to actuate the electrical switch and again close the circuit between the power source and the air conditioner compressor.

FIGURE 2 of the drawings shows an alternate means of operating the switch. However, before discussing the details of FIGURE 2, it is believed best to discuss the construction of the switch of the present invention which actually can be pressure-responsive or operated by an appropriate arm mechanism.

Specifically referring to FIGURES 3 and 4, the switch of the present invention is made up of a base element in the general shape of a circular can bottom 30, a vacuum line 32 in open communication with base 30 and designated as vacuum line 32 leads to the engine manifold where the manifold pressure is the condition sensed. The switch has a generally concave cover 34 which fits tightly over the base 30 to form an airtight container. It is obvious at this point that the cover 34 may be concave or convex and that the concavity or convexity may be in the base rather than in the cover depending on how the unit is to be mounted. Further, where mechanical operation of the switch is desired, the vacuum line 32 may be eliminated. Mounted within the enclosure is a micro switch 36 having a plunger 38. In the instance shown in FIGURE 3, micro switch 36 is a normally open switch and when the cover 34 is depressed either mechanically or by drawing a vacuum through line 32, the plunger 38 will be depressed, closing the circuit in which switch 36 is mounted. Switch 36 is mounted on a bracket in a manner such that it may slide to the right and left a limited amount. This bracket (not shown) is positioned behind switch 36 to permit movement of switch 36 in a vertical direction. In the variations shown in FIGURE 4, the switch can only be pressure actuated since switch 36 is mounted on a flexible arm 42 above the cover 34 of the container. Of course, by moving the switch slightly to the side of the center, mechanical operation for flexing of the cover 34 may be carried out. In any event, in this instance, switch 36 is a normally closed switch which is open when cover 34 is in its normal state of flexure and which will be closed when the plunger 38 is released by the downward flexure of cover 34. Switch 36 in FIGURE 4 is also mounted on arm 42 in a manner to permit vertical and horizontal movement thereof. In both FIGURES 3 and 4, vertical movement of switch 36 and hence a change in the set point of the switch is effected by means of set screw 44. Horizontal movement of switch 36 and hence a change in the differential pressure response of the switch is effected by adjustment of the screw 46.

In the alternative form of FIGURE 2 which does not require a sensing of the manifold pressure, operation can be effected mechanically by depressing the accelerator of the automobile to a point near its ultimate limit. As shown in FIGURE 2, the accelerator control rod 50 is connected to pivotal tab 52. Pivotal tab 52 is mounted on pivot 54 on the side of the carburetor of the engine 48. An operating pin or rod 56 bears against the top of switch 58. Switch 58 is positioned and set to operate and open the switch when the accelerator nears its ultimate travel, rod 50 nears its extreme pull to the left, and tab 52 approaches its maximum clock-wise rotation. Thus, in accordance with FIGURE 2, when the accelerator is depressed to a point near its maximum limit, in order to pass another car, etc., the pin 56 operates the switch means 58, the switch is opened and the air conditioner

again closes and the air conditioner may operate normally in response to the thermally sensitive switch.

While the present invention has been described with reference to specific illustrations and specific examples, it is to be understood that these are illustrative only.

I claim:

1. A system for automatically shutting off an auto accessory adapted to be driven by the engine of said auto when the operation of said engine approaches its maximum capacity, as indicated by a preselected high pressure in the intake manifold of said engine, comprising; sensing means, operatively connected to said intake manifold of said engine, for sensing said preselected high pressure; and switch means operatively coupled to said sensing means and operable by said sensing means, in a manner such that said switch means is opened when said sensing means senses said predetermined high pressure, and operatively connecting said engine to said accessory whereby said accessory is operative or non-operative as dictated by said switch.

2. A system in accordance with claim 1 wherein the preselected manifold pressure is a pressure approaching atmospheric pressure.

3. A system in accordance with claim 1 wherein the sensing means is a closed, generally-hollow container having a flexible wall which is flexed by a change in pressure in the container, the switch means is mounted adjacent said flexible wall and the operating element of said switch means is operated by flexure of said flexible wall.

4. A system in accordance with claim 3 wherein the switch means is adjustably mounted on the container to permit movement of the operating element of said switch means laterally with respect to the center of flexure of the flexible wall of said container.

5. A system in accordance with claim 3 wherein the switch means is adjustably mounted on the container to permit movement of the operating element of said switch means toward and away from the flexible wall of said container.

6. A system in accordance with claim 3 wherein the switch means is adjustably mounted on the container to permit movement of the operating element of said switch means laterally with respect to the center of flexure of the wall of said container and to permit movement of said operating element of said switch means toward and away from said flexible wall of said container.

7. A system for automatically shutting off an auto air-conditioner adapted to be driven by the engine of said auto when the operation of said engine approaches its maximum capacity, as indicated by a preselected high pressure in the intake manifold of said engine, comprising; sensing means, operatively connected to said intake manifold of said engine, for sensing said preselected high pressure; and switch means operatively coupled to said sensing means and operable by said sensing means, in a manner such that said switch means is opened when said sensing means senses said predetermined high pressure, and operatively connecting said engine to said air-conditioner whereby said air-conditioner is operative or non-operative as dictated by said switch.

8. A system in accordance with claim 7 wherein the preselected manifold pressure is a pressure approaching atmospheric pressure.

9. A system in accordance with claim 7 wherein the sensing means is a closed, generally-hollow container having a flexible wall which is flexed by a change in pressure in the container and the switch means is mounted adjacent said flexible wall and the operating element of said switch means is operated by flexure of said flexible wall.





10. A system in accordance with claim 9 wherein the switch means is adjustably mounted on the container to permit movement of the operating element of said switch means laterally with respect to the center of flexure of the flexible wall of said container.

Aug. 26, 1969

R. K. HAROLDSON
 AIR CONDITIONER CONTROL MEANS RESPONSIVE
 TO VEHICLE ENGINE POWER DEMANDS
 Filed Sept. 12, 1967

3,462,964

SEE FIG. 1
 COPY (201)

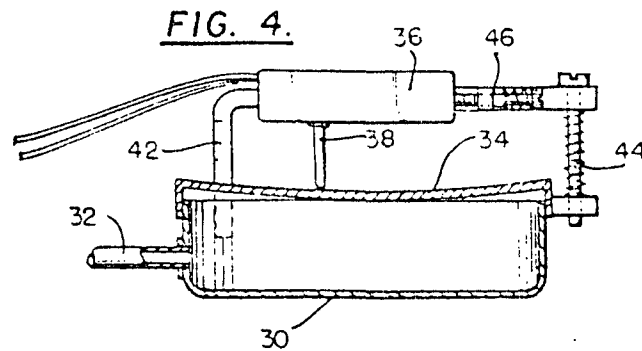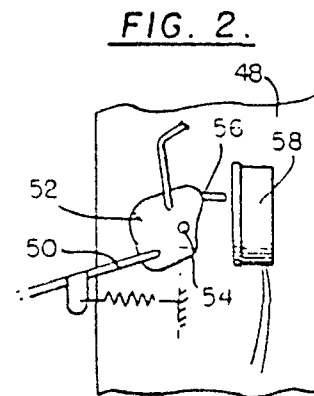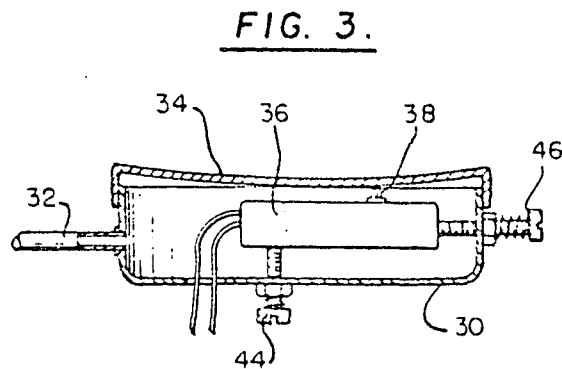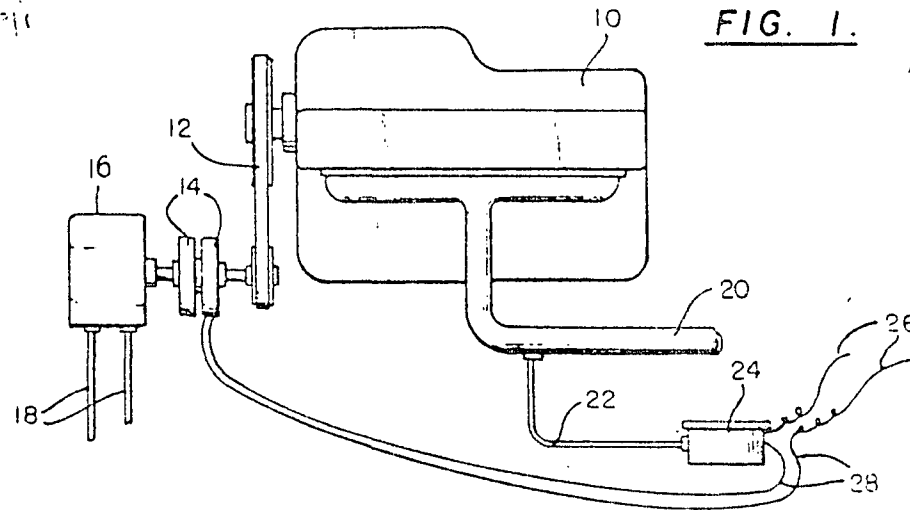

INVENTOR

Ralph K. Haroldson

BY *Charles F. Steinger*
 ATTORNEY