NASA/TM-2005-213917/Version 1.0 NESC-RP-04-12/04-060-E



Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment -Analysis of HST Health

Steven J. Gentz, Brent N. Heard, Robert F. Hodson, Duane H. Pettit, and John E. Pandolf NASA Langley Research Center, Hampton, Virginia

John D. Azzolini, Cornelius J. Dennehy, Rodger E. Farley, and Frank J. Kirchman NASA Goddard Space Flight Center, Greenbelt, Maryland

Peter D. Spidaliere NASA Johnson Space Center, Houston, Texas Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the lead center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- TECHNICAL PUBLICATION. Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peerreviewed formal professional papers, but having less stringent limitations on manuscript length and extent of graphic presentations.
- TECHNICAL MEMORANDUM. Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- CONTRACTOR REPORT. Scientific and technical findings by NASA-sponsored contractors and grantees.

- CONFERENCE PUBLICATION. Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or co-sponsored by NASA.
- SPECIAL PUBLICATION. Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- TECHNICAL TRANSLATION. Englishlanguage translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results ... even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at http://www.sti.nasa.gov
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA STI Help Desk at (301) 621-0134
- Phone the NASA STI Help Desk at (301) 621-0390
- Write to: NASA STI Help Desk NASA Center for AeroSpace Information 7121 Standard Drive Hanover, MD 21076-1320

NASA/TM-2005-213917/Version 1.0 NESC-RP-04-12/04-060-E



Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment -Analysis of HST Health

Steven J. Gentz, Brent N. Heard, Robert F. Hodson, Duane H. Pettit, and John E. Pandolf NASA Langley Research Center, Hampton, Virginia

John D. Azzolini, Cornelius J. Dennehy, Rodger E. Farley, and Frank J. Kirchman NASA Goddard Space Flight Center, Greenbelt, Maryland

Peter D. Spidaliere NASA Johnson Space Center, Houston, Texas

National Aeronautics and Space Administration

Langley Research Center Hampton, Virginia 23681-2199

The use of trademarks or names of manufacturers in constitute an official endorsement, either expressed or National Aeronautics and Space Administration.	n the report is for accurate reporting and does not r implied, of such products or manufacturers by the
Available to SA Center for AeroSpace Information (CASI)	from: National Technical Information Service (NTIS

NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #: 1.0
Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health		Page #: 1 of 34

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment - Analysis of HST Health

August 24, 2004


Prepared by: Steven J. Gentz NESC Principal Engineer

NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #: 1.0
Tide: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health		Page #: 2 of 34

Signature Page

NESC Independent Technical Assessment Team

Steven J. Gentz, NESC Lead	John D. Azzolini, GSFC
Cornelius J. (Neil) Dennehy, GSFC	Rodger E. Farley, GSFC
Brent N. Heard, LaRC	Robert F. Hodson, LaRC
Frank J. Kirchman, GSFC	John E. Pandolf, LaRC
Duane H. Pettit, LaRC	Peter D. Spidaliere, JSC

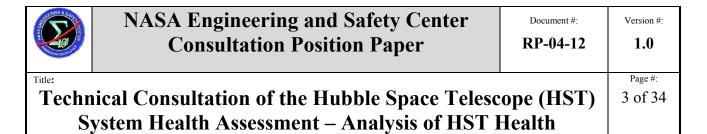

EXECUTIVE SUMMARY

On July 13, 2004, the Associate Administrator for the Office of Exploration Systems, Admiral Craig E. Steidle, with concurrence from the Chief Safety & Mission Assurance Officer, Bryan D. O'Connor, and NASA's Chief Engineer, Theron M. Bradley, solicited support from Ralph R. Roe, NESC Director, in the evaluation of the Hubble Space Telescope's (HST) long-term health prospects.

The NESC consultation was one component of an Agency decision on the viability of extending the life of the HST through a robotic service mission (SM). To address the request within the specified parameters, a multi-Center review team of knowledgeable technical specialists was convened to analyze the current and anticipated state of spacecraft subsystems and the parameters that describe the HST health to determine the timeliness of a robotic SM and whether this type of mission is likely to provide the capability to extend the useful scientific life of the HST by 5 years. The NESC team examined numerous HST Program reports and briefings, and the findings from the Independent Program Assessment Office (IPAO) and the Aerospace Corporation Analysis of Alternatives (AOA) as they related to the degradation of the HST's health. The NESC team also examined the state of HST subsystems that will not be serviced under the Goddard Space Flight Center (GSFC) baseline concept (Appendix A) including, but not limited to, the Fine Guidance Sensor (FGS) system, the Data Management Unit, the Multi-Layer Insulation (MLI) blankets, and the main science instrument systems. Appendix F provides HST illustrations.

The technical disciplines used for this assessment were selected based on the consideration of the HST subsystems and included: Guidance Navigation and Control (GN&C), Mechanical Systems, Power and Avionics, Safety and Mission Assurance (S&MA), Scientific Payloads, and Systems Engineering.

The review of the IPAO and AOA documents was supplemented with a significant quantity of HST-related reports, presentations, and other applicable references. A partial listing of these documents is located in Appendix C. In addition, extensive technical discussions were held with the HST Program liaison, numerous HST Operations, Flight Systems Engineering, Systems Management personnel and team technical peers.

By design and circumstances of limited time, the approach was concurrent discipline-based with selective subsystem penetration (audit structure). This assessment method enabled rapid review of the diverse and formidable quantity of HST Program information, while allowing the identification of systemic as well as isolated system characteristics. No specific attempt was made at independent verification of trending information, mathematical models, or performance parameters. Aspects of information transfer from daily operations through HST Program review were included with the data review. This allowed an examination of information flow to ensure

	NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #: 1.0
Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health		Page #: 4 of 34	

critical performance and health trends were identified and communicated through the decision chain.

In summary, the NESC review team has assessed the HST Program to be:

- organizationally structured to recognize performance deterioration and communicate these system changes through all levels of the Mission Operations, Systems Engineering, and Software (MOSES) team and HST Program Office;
- a highly skilled personnel base to support both operations and sustaining engineering associated with a SM;
- experienced in effective development and implementation of operational workarounds to provide the greatest likelihood of continued science until a SM can be effected (baring a rapid degradation in battery capacity); and
- prepared with contingency plans to perform a power management protocol to maximize HST attitude control until a SM can be effected.

After a thorough review of the information examined and the technical discussions held, it appears there is a high likelihood of having a viable vehicle available for a robotic SM. In addition, following successful equipment and instrument replacement during an optimized SM, the potential for at least five additional years of science discovery is very good.

Recommendations are provided to aid in the decisions that will lead to an optimum SM manifest and to extend the science service life its greatest extent.



Document #: **RP-04-12**

Version #: **1.0**

Title

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health Page #: 5 of 34

NESC Position Paper

· · · · · · · · · · · · · · · · · · ·			
Request Number #: 04-060-E			
Requestor Name: Craig E. Steidle	Requestor Contact Info: Craig.E.Steidle@nasa.gov		
	202-358-1523		
Short Title: Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health			
Degradation			
Description: To evaluate the long-term health of the HST through Year 2013 following a successful			
robotic servicing mission. Specifically, to provide input on the predicted reliability/expected availability of			
latin the first term of the fi			

the major subsystems and instruments. Especially those subsystems and instruments not scheduled for servicing in the baseline concept.

Date Received: 13 July 2004

Date Consultation Initiated: 13 July 2004

Date Received: 13 July 2004

Lead Assigned: Steven J. Gentz

Lead Contact Info: Steven.J.Gentz@nasa.gov
757-864-9263

Date Consultation Concluded: 12 August 2004

Consultation and Assessment Team

Last					
Name	First Name	Center	Office Number	Email	
Gentz ¹	Steven	LaRC	757-864-9263	Steven.J.Gentz@nasa.gov	
Azzolini	John	GSFC	301-286-8480	John.D.Azzolini@nasa.gov	
Dennehy	Neil	GSFC	301-286-5696	Cornelius.J.Dennehy@nasa.gov	
Farley	Rodger	GSFC	301-286-2252	Rodger.E.Farley@nasa.gov	
Heard	Brent	LaRC	757-864-5021	Brent.N.Heard@nasa.gov	
Hodson	Bob	LaRC	757-864-2326	Robert.F.Hodson@nasa.gov	
Kirchman	Frank	GSFC	301-286-9292	Frank.J.Kirchman@nasa.gov	
Pandolf	John	LaRC	757-864-9624	John.E.Pandolf@nasa.gov	
Pellicciotti	Joe	GSFC	301-286-9292	Joseph.W.Pellicciotti@nasa.gov	
Pettit	Duane	LaRC	757-864-5224	Duane.H.Pettit@nasa.gov	
Spidaliere	Pete	JSC	281-483-9721	Peter.D.Spidaliere@nasa.gov	
McAlhaney	Lisa	LaRC	757-864-2139	Lisa.A.Mcalhaney@nasa.gov	
Herman	Natasha	LaRC	757-864-3811	N.M.Herman@larc.nasa.gov	
Kalinowski ²	Keith	GSFC	301-286-3369	J.Keith.Kalinowski@nasa.gov	
Schaffer ³	Matt	HQ - Code T	202-358-4240	Matthew.Schaffer-1@nasa.gov	
Duh ⁴	Jen Chow (JC)	HQ - Code D	202-358-2225	JCDuh@nasa.gov	
Sarsfield ⁴	Liam	HQ - Code D	202-358-1870	Liam.P.Sarsfield@nasa.gov	
Hwa ⁵	Vicky	HQ - Code B	202-358-4336	Vicky.Hwa@nasa.gov	


¹Team Lead - NESC Principal Engineer's Office

²HST Liaison

³Office of Exploration Liaison

⁴Office of Chief Engineer Liaison

⁵Aerospace Corporation AOA Monitor

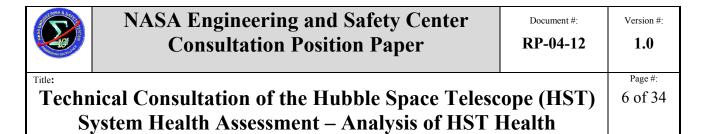

In addition to outstanding support provided by the assessment team, the rapid response to this request could not have been accomplished without the exemplary support from the HST Program Office (Dr. Keith Kalinowski), the Lockheed Martin Corporation MOSES team (specifically, Tony Cruz, Mike Wenz, Stan Krol, Dave Haskins, Dan Smith, Mike Myslinski, Christine Cottingham, Greg Goulet, Jessica Regalado, Harry Wynn, Kevin Matthews, and Mike Prior), and the Space Telescope Science Institute representative (Manfred Miebach).

Added appreciation is extended to the NESC Management and Technical Support Office (specifically Lisa McAlhaney, Natasha Herman, and Erin Moran).


Consultation Approach

The NESC conducted an abridged independent examination of available information and personnel interviews to evaluate the current and anticipated state of the spacecraft subsystems and the parameters that describe the HST's health. These examinations included the projected timeliness of a robotic SM and whether the GSFC baseline concept is likely to provide the capability to extend the useful scientific life of the HST by an additional 5 years. The NESC team collected a broad spectrum of pertinent HST Program analyses, reports, briefings, and the results of the IPAO and the Aerospace Corporation AOA assessments as they relate to the degradation of the HST's health. This review included the state of the HST subsystems having the potential to impact the viability of the HST, but will not be serviced under the baseline robotic SM.

The identified documents were distributed to the NESC team for initial independent review and during a Technical Interchange Meeting (TIM) at GSFC (refer to Appendix D for the TIM agenda). Concurrent with these reviews were periodic discussions with the HST Program Liaison for clarifications to information provided and requests for further reference material. The TIM enabled in-depth exchange of information internally to the review team and externally with the HST Program personnel. In the course of these discussions and technical interchanges, additional reports and information were requested for review and evaluation. Finally, the TIM allowed for the consolidation of the various technical discipline observations into a combined package for a stakeholder interim status review (refer to Appendix E).

The following are the major milestones of the NESC assessment:

Milestone	Date
Initial Stakeholder Meeting	13 July 2004
Review Team Formulation	14 - 20 July 2004
Review HST Operations and Performance Data Packages	14 - 26 July 2004
Consultation Scope Definition	19 July 2004

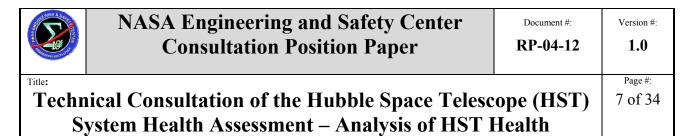

Milestone	Date
Kickoff Teleconference	20 July 2004
Status Teleconference with Stakeholders	23 July 2004
GSFC TIM	28 - 29 July 2004
Interim Status Briefing to Stakeholders	3 August 2004
Final Report Submission	24 August 2004

Data Reviewed

The technical disciplines of GN&C, Mechanical Systems, Power and Avionics, S&MA, Scientific Payloads, and Systems Engineering were assigned review of their respective areas of expertise based on the following HST subsystem divisions:

- Data Management
- Electrical Power
- Mechanisms*
- Instrumentation and Communication
- Optical Telescope Assembly
- Science Instruments
- Pointing Control
- Thermal Control
- Safing

In addition to the copious volume of information available, the method of information transfer was examined to determine if crucial information on the HST's system health was adequately being disseminated from the MOSES team to the HST Program for review and disposition. This included the procedures used in performance and anomaly identification, reporting, and tracking.

OBSERVATIONS/RECOMMENDATIONS


Following are three main areas pertaining to *Hardware, Operating Culture*, and *Reliability Analysis*. The recommendations are sequentially numbered to aid discussion.

HARDWARE

Observations

A number of components have longevity exceeding specification life.
 This appears to be a combination of conservative reliability analysis assuming highly

^{*} Mechanisms is not typically listed as a separate subsystem for HST reporting

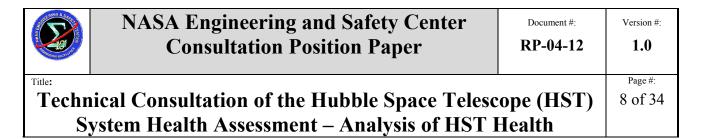

stressed components; quality parts screening (Grade B/NASA PPL-21 Grade 2), fabrication, and test; infant mortality culling; and refined HST operations to minimize degradation (especially to components with known performance concerns).

- The HST architecture appears robust with considerable redundancy and has proven to be adaptable to unforeseen configurations.
- The following components have been identified as having performance issues or require additional emphasis by the HST Program Office:

- Nickel Hydrogen Batteries

The HST batteries continue to have decreased capacity at a calculated total system rate of -34.2 AmpHour per year (-5.7 Ahr per battery per year). At this projected rate, the system capacity is predicted to fall below the lowest Safemode trigger of 110 Ahr at the end of 2009. Unless changes in the recharging and reconditioning procedures are validated to impede this trend, battery capacity will remain one of the two most likely system limiters for the HST. It is the principal factor in the overall observatory life projections prior to a SM.

- Rate Sensor Unit (RSU) Gyroscopes

Currently, RSU gyroscopes 3 and 5 have failed with gyroscope 6 held in reserve with known bias instability performance issues. To support nominal pointing control to the desired accuracy requires at least three functional gyroscopes. Reliability estimates are for a greater than 50% probability of having three gyroscopes until the beginning of 2006. The HST Program is developing a two-gyroscope pointing and science scheduling capability in advance of the anticipated loss of three functional gyroscopes. Continued science observations are projected for an additional 12 to 18 months beyond the loss of a three-gyroscope capability using software corrections for the known performance issues of gyroscope 6, and the implementation of a two-gyroscope operational mode. Gyroscope life is the principal factor for observatory useful science life projections and the other most likely system limiter for the HST prior to a SM.

- Fine Guidance Sensors (FGSs)

Three FGSs provide precise fine-pointing adjustments to tracking guide stars at sub-arcsecond levels with only two functioning FGSs required for nominal science operations. There is concern with the performance of FGS 2R and FGS 3. The effectiveness of FGS 2R is decreasing as a result of a servo-loop gain issue that is most probably due to anomalous Light Emitting Diode (LED).

	NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #:
Tide: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health		Page #: 9 of 34	

FGS 3 has significant bearing performance issues that require higher motor torques to overcome, and is being used sparingly to preserve remaining life. Life predictions for adequate FGS control vary, but appear to provide sufficient margin to the projected SM in 2008, but not to the planned end-of-life in 2013. Replacement of the FGSs was in the Orbiter SM, but is not in the baseline GSFC robotic SM.

- Pointing/Safemode Electronics Assembly (PSEA) Safing Computer

Daily temperature monitoring and long-term trending show the PSEA safing computer operating at the yellow high limit (49°C). The mean and maximum temperatures for the first quarter of calendar year 2004 were 40.35 and 48.29°C, respectively. The red high limit for this system is 54.5°C. The HST Program expects to initiate ground testing of a PSEA engineering unit to validate the current yellow and red high limits. The results of this testing may lead to an increase in the warning limits or may require operational controls to preclude limit violations.


- Space Telescope Imaging Spectrograph (STIS)

The STIS was installed on 14 February 1997 during SM 2. In the course of this assessment (3 August 2004), the STIS transitioned into a suspend mode. Preliminary findings by the Failure Review Board indicate a problem with the Side 2 +5 volt Interpoint power converter in the Mechanism Power Supply. This suspected fault is similar to an electrical malfunction that occurred in May 2001 that rendered the Side 1 electronics inoperable.

• The following cross-cutting system aspects have potential concerns:

- Total Ionizing Dose (TID) exposure of component electronics.

The HST Program provided a technical memorandum on the "Radiation Reliability Assessment of the Hubble Space Telescope Electronics", dated 28 February 1998. This study identified potential TID concerns through 2010. However, this study reveals that only a portion (approximately 64%) of the integrated circuits (ICs) were reviewed from the total of 1120 semiconductor devices contained in the parts list. The study does cite a number of ICs with probable degradation and potential TID issues in a number of electronic devices if not shielded in low dose areas of the vehicle. In general, the report indicates that most devices fabricated during the HST development period are relatively immune to TID effects, but later electronic upgrades may be more susceptible.

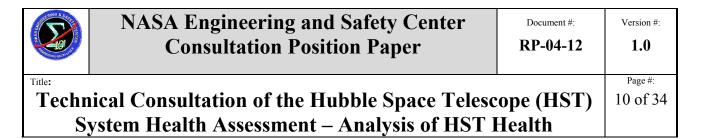

Overall, this report provides incomplete evidence to support that the electronics are operating within TID specifications to the intended operational period of 2008 or the end-of-life date of 2013. The HST Parts Control Plan specifies a minimum TID of 15 KRads for generic parts and 5 KRads if generic data is unavailable. Surface dose can exceed a MRad/year, but diminishes rapidly with shielding.

As electronics devices accumulate total dose, device power increases due to transistor parameter shifts and eventually the devices will degrade beyond operational ranges. To date, there are no known HST electronics failures due to this mechanism, but the likelihood increases with TID accumulation.

 Increasing thermal environment in the HST aft shroud due to higher power consuming equipment and increased instrument utilization.

This condition appears to be a result of the installation and operation of more capable science instruments that consume more power, and not a result of MLI degradation. The HST Program is performing ongoing analyses and expects to institute operational limitations to manage the thermal load.


The proposed replacement of the Corrective Optics Space Telescope Axial Replacement (COSTAR) with the Cosmic Origins Spectrograph (COS) in the baseline robotic SM will increase thermal loading, as the COS is estimated to generate approximately 200 Watts versus the reported 45 Watts from COSTAR.

 Review of Failure Modes and Effects Analysis (FMEA) and hazard analyses for identification of single point failures.

The HST Program reported that in preparation for the Power Control Unit (PCU) replacement during SM 3B, a review of the 1987 FMEA and hazard analyses was completed at the component and system levels. This information was relayed late in the assessment period and represents a considerable quantity of additional reports only available though an internal GSFC document control system. No comprehensive review was performed by the NESC team and will be forwarded as a recommendation to the HST Program for completion prior to a robotics SM Critical Design Review (CDR).

B-side electronics has not been exercised since prior to launch and has an assumed reliability of 1 and a failure rate equal to 10% of the operating value.

The architectural design of the HST does not allow periodic verification of the redundant electronics circuitry without considerable disruption to science

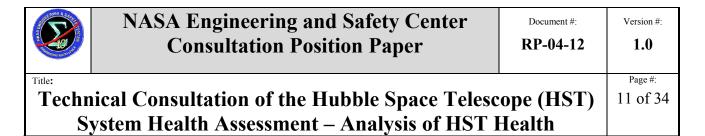

operations and the potential risk to recovery of A-side operations. Ground testing is assumed to have ensured the absence of latent defects in the electrical components and manufacturing. However, the STIS has been the only system that required the use of the redundant electronics. This assumed reliability represents the HST Program's recognized systemic risk. September 2002 is the most recent HST Program assessment of the effort involved to prepare, verify, and implement on-orbit testing of the HST's redundant components. It concluded verification of the B-side electronics was not recommended due to a number of factors that included a small, but non-zero, risk that one of the power-cycled modules would not restart.

Continued degradation of the MLI outer ply due to environmental exposure.


Prior SMs observed a greater degradation than expected and implemented rudimentary fixes including application of New Outer Blanket Layer (NOBL) material to minimize material and thermal performance loss. Increased damage is predicted during the next several years of solar minimum. The potential for dislodged MLI becoming a contamination concern during future servicing requires assessment and mitigation.

A number of components have service exposure greater than design life.

The contributing factors that have resulted in the exemplary success of a majority of components are understood from at least a qualitative standpoint. However, electrical and mechanical components cannot be expected to survive indefinitely. Recognition of performance issues will continue to rely on telemetry for long-term health assessment. Graceful failure modes with gradual precursor performance indicators cannot always be expected. A structured Life Extension Initiative defined by the HST Program is a mechanism to explore anomaly detection, fault progression, and failure modes.

Recommendations

- 1.1 Continue the evaluation of recommendations on life prediction and battery capacity protocol identified in NESC Report, "Technical Consultation of the Hubble Space Telescope (HST) Nickel Hydrogen (N_iH₂) Battery Charge Capacity Prediction", NESC 04-050-E, dated 17 June 2004.
- 1.2 Assess the augmentation of GSFC baseline robotic SM to include replacement of at least one FGS.
- 1.3 Complete planned ground testing to determine thermal margin limits of PSEA Safing computer prior to robotic SM CDR. Update thermal warning high limits

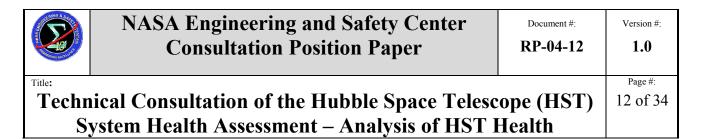

or institute operational controls to limit temperature exposure to within allowable operational ranges. If thermal limits can not be successfully raised, then assess potential for augmentation of GSFC baseline robotic SM to include replacement or redundant Safing computer.

- 1.4 Locate and update, or generate, a comprehensive TID exposure analysis of HST components to identify any elements at risk to performance degradation for the intended operational period of 2008 and to the end-of-life date of 2013. This analysis should be completed or updated prior to the robotic SM CDR.
- 1.5 Release an operational plan to address aft shroud thermal environment conditions prior to the robotic SM CDR. Update this plan to consider impact of de-orbit module attachment and the replacement instruments and components as part of any SM concept.
- 1.6 Complete an updated review of the FMEA and hazard analyses for the identification of single point failures prior to the robotic SM CDR. Assess the potential for augmentation of GSFC baseline robotic SM based on this review.
- 1.7 Confirm thermal margins with respect to expected increased degradation of MLI outer ply prior to the robotic SM CDR.
- 1.8 Identify contamination control protocol to mitigate risk of degraded MLI migration into internal structure of the HST during a SM.
- 1.9 Pursue a structured Life Extension Initiative prioritized on component criticality.

OPERATING CULTURE

Observations

- The HST Program appears to be a highly motivated and resourceful team with extensive corporate knowledge that has repeatedly demonstrated the ability to react to and plan for adverse conditions. A number of innovation applications of HST systems to non-traditional roles are considered in fault planning. This team has operations rooted in established procedures and a layered approach to anomaly recognition and disposition.
- The HST Program team appears to practice an iterative SM versus End-of-Life paradigm.

This manifests as data trending of performance parameters directed towards near-term problem recognition and characterization. The HST team has the prerequisite skills and data available to make these predictions and this observation may be one of nomenclature. However, clarification should be provided to the MOSES team on the

	NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #: 1.0
Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health		Page #: 13 of 34	

scope of their overall long-term telemetry/performance trending efforts.

Recommendation

2.1 Provide specific direction to HST Systems Engineers to complete end-of-life predictions for major components and subsystems with continuous updates from telemetry data and ground-based Life Extension Initiative results prior to the robotic SM CDR.

RELIABILITY ANALYSIS

Observations

- The reliability analysis updated by the Aerospace Corporation uses typical assumptions, failure rate updating, and modeling consistent with MIL-HDBK-217 methodology.
 - Two methods were used to update the 1992 failure rate predictions. First, the methodology (RADC-TR-85-229) developed by the Reliability Analysis Center is used to reduce the failure rate to 60% of the original MIL-HDBK-217 failure rates. This methodology is typically used by current satellite manufacturers. The second update uses operational experience to adjust the HST subsystem failure rates. By using a Bayesian methodology, the "a priori," or original estimate, can be updated. This methodology is also common in reliability engineering and Probabilistic Risk Assessments (PRAs).
- The current reliability analysis models only electronic failure rates with the exception of the RSU gyroscopes, where a mechanical wear out rate is applied.
 - The HST has many mechanical systems that should be modeled in the reliability analysis. To perform a Bayesian update to include both HST electrical and mechanical components, shape and scale parameters and gamma distributions are required. These values can be based on hardware experience and engineering estimations. These refined parameters would then be used to adjust component failure rates. Since there are many different types of subsystems in HST, the observed data accumulated over its life may be used to develop different shape parameters for each subsystem and then adjust each failure rate accordingly. Following these failure rate adjustments, the models developed in the original HST Reliability Assessment could be used to more accurately represent the current and expected reliability of the HST.

	NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #:
Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health		Page #: 14 of 34	

• MIL-HDBK-217 unique analyses are intended to be a design trade tool and not an absolute estimate of component field (in-service) failures.

Recommendations

- 3.1 Update the reliability model from the August 2003 release to account for HST performance experience to date.
- Perform sensitivity studies on shape and scale parameters of current reliability analysis to determine if there is a change to the HST reliability drivers.
- 3.3 Update the reliability analysis to incorporate shape and scale parameters and gamma distributions for the electrical and mechanical components using accumulated time and failures experienced during on-orbit operations.

	NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #: 1.0
Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health			Page #: 15 of 34

APPENDIX A

Orbiter SM4 Planned Manifest

Cosmic Origins Spectrograph (COS)
Wide Field Camera 3 (WFC 3)
Fine Guidance Sensor (FGS)
Aft Shroud Cooling System
Batteries
Gyroscopes
New Outer Blanket Layer (NOBL)
Data Handling Cross Strap Unit (DSC)

GSFC Baseline Robotic SM4 Proposed Manifest

Cosmic Origins Spectrograph (COS)
Wide Field Camera 3 (WFC 3)
Batteries
Gyroscopes

NASA Engineering and Safety Center Consultation Position Paper Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health

APPENDIX B

List of Acronyms

Ahr AmpHour

AOA Analysis of Alternatives CDR Critical Design Review

COS Cosmic Origins Spectrograph

COSTAR Corrective Optics Space Telescope Axial Replacement

DC Direct Current

DSC Data Handling Cross Strap Unit

FGS Fine Guidance Sensor

FMEA Failure Modes and Effects Analysis
GN&C Guidance Navigation and Control
GSFC Goddard Space Flight Center

HQ Headquarters

HST Hubble Space Telescope

IC Integrated Circuit

IPAO Independent Program Assessment Office

LaRC Langley Research Center
LED Light Emitting Diode
JSC Johnson Space Center

KDDL Known Data Discrepancy List

MLI Multi-Layer Insulation

MOSES Mission Operations, Systems Engineering, and Software

NOBL New Outer Blanket Layer NRB NESC Review Board PCU Power Control Unit

PRA Probabilistic Risk Assessment

PSEA Pointing/Safemode Electronics Assembly

RSU Rate Sensor Unit

S&MA Safety and Mission Assurance

SM Service Mission

STIS Space Telescope Imaging Spectrograph

TID Total Ionizing Dose

TIM Technical Interchange Meeting

WFC Wide Field Camera

NASA Engineering and Safety Center Consultation Position Paper Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health

APPENDIX C

HST Program Reports and Briefings

HST Program Reports and Briefings

- Mission Operations, Systems Engineering, and Software Program Observatory Performance Assessment Quarterly Reports (June 2004, 2003, and 2001)
- 26 July 2004, Mission Operations Snapshot
- 15 July 2004, Mission Operations, Systems Engineering, and Software Program Quarterly Briefing
- 22 June 2004, HST Survivability; Comparison of Servicing Tasks
- 17 June 2004, Technical Consultation of the Hubble Space Telescope (HST) Nickel Hydrogen (N_iH₂) Battery Charge Capacity Prediction, NESC 04-050-E
- 10 June 2004, Known Data Discrepancy List (KDDL)
- 9 June 2004, Comments on RSU being located on the De-orbit Module, EM HST-04-004A
- 2 & 3 June 2004, Status of Hubble Spacecraft
- 2 June 2004, Hubble Science Operations
- 28 April 2004, Effect of WFPC3 Mechanism Disturbances on RGA and PCS, EM HST-04-001A
- 18 December 2003, Limited Life Items and Risk Mitigation List (SM-4)
- 15 July 2003, Anomaly Reporting for HST Operations and Test
- 9 September 2002, Impacts and Risks of On-Orbit Testing of HST's Redundant Modules
- 13 February 2002, HST Cargo Systems Manual
- 2 August 2001, STIS Failure Review Board Final Report
- 13 & 14 May 2004, HST Robotic Servicing Concept Review
- 1 April 1997, HST Parts and Control Plan
- 1991, The Flight Hardware and Ground System for HST Astrometry

Aerospace Corporation Reliability Model

- July 2002, HST Reliability Assessment, Report No. TOR-2003(2154)-2352
- August 2003, Adjusted Reliability Model for Science Operations

Independent Program Assessment Office (IPAO) Briefings

- 21 through 24 June 2004, Briefings
- 20 July 2004, Final Review Briefing

Aerospace Corporation Analysis of Alternatives (AOA) Briefing

- 9 July 2004, Mid Term Briefing
- 3 August 2004, Final Review Briefing

Lockheed Martin Technical Memorandum TM12-97

 28 February 1998, Radiation Reliability Assessment of the Hubble Space Telescope Electronics


NASA Engineering and Safety Center Consultation Position Paper Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health Version #: RP-04-12 Page #: 18 of 34

APPENDIX D

Hubble Space Telescope (HST) System Health Independent Technical Consultation Technical Interchange Meeting July 28-29, 2004 Proposed Agenda

Wednesday, July 28, 2004 GSFC East, Building 33, Conference Room H118


Time (EST)	Topic/Activity	Presenter/Participants
8:30	Welcome, Safety/Emergency Procedures, Logistics, and Facility Information	Gentz
8:45	Assessment/Meeting Objective	Gentz
9:15	Initial Comments - Reliability - Mechanical Systems - Guidance, Navigation and Control - Power & Avionics - Scientific Payloads - Systems Engineering	Team
11:30	Lunch	
12:30	Travel to Lockheed Martin Corporation Facility 7474 Greenway Center Drive Building 229, Suite 200 301-901-6174	Team
13:00	Mission Operations, Systems Engineering, and Software (MOSES) Program Review - NESC Purpose and Introduction - CHAMP/MOSES HST Role - Data Management - Electrical Power - Mechanisms - Instrumentation & Communication	Gentz Cruz Regalado Krol Mathews

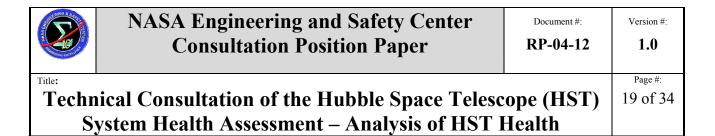

	- Optical Telescope Assembly	Wynn
	- Science Instruments	
	 Pointing Control/Sensor Calibration 	Wenz
	- Thermal	Bassford/Heeler
	- Safing	Smith
	- Operations (FOT, HSTARs,	
	Briefings, etc.)	Cottingham
	- Systems Management	Myslinski
		Goulet
		Haskins
15:30	Travel to GSFC, Building 33	Team
16:00	Working Session and Open Discussion	Team
17:00	Summary/Action Items/ Issues	Gentz
17:30	Adjourn	

Thursday, July 29, 2004 GSFC East, Building 33, Conference Room H118

Time	Topic/Activity	Presenter/Participants
(EST) 8:30	Prior Days Review and Current Day Plan	Gentz
9:00	Carryover Topics from Wednesday Document Review and Open Discussion	Team
11:15	HST Program Office Discussion	
12:00	Lunch	
13:00	Code T Status Outline	Team
15:00	Open Discussion	Team
16:30	TIM Summary/Action Items	Gentz
17:30	Adjourn	

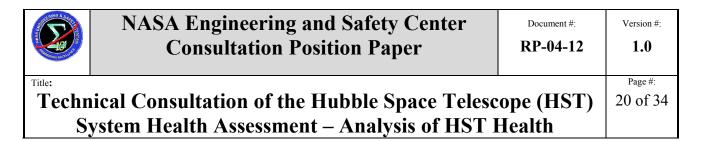

APPENDIX E

Interim Status Briefing to Admiral C. Steidle (August 3, 2004)



Hubble Space Telescope (HST) Long Term Health and Availability

NESC Independent Technical Consultation 04-060-E

Interim Status Briefing to



Admiral Craig Steidle
Associate Administrator for Exploration Systems

August 3, 2004

1



Document #:

Version #:

RP-04-12

1.0

Title:

Page #: 21 of 34

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health



ASSESSMENT APPROACH

Documentation Review

- Independent Program Assessment Office (IPAO) Briefings
- Aerospace Corporation Analysis of Alternatives (AOA) Briefing
- HST Program Reports, Briefings, Plans, and Policies
- Aerospace Corporation Reliability Modeling

Process Review

- HST procedures and guidelines
- HST personnel interviews and discussions

Schedule

- Task Initiation: 15 July 2004
- Team Formation: 20 July 2004
- Technical Interchange Meeting with HST Program: 28 29 July 2004
- Interim Status Briefing: 3 August 2004
- Final Report: 13 August 2004

2



Document #: **RP-04-12** Version #: 1.0

Page #: 22 of 34


Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health



OVERVIEW

Subsystems Examined

- **Data Management**
- **Electrical Power**
- Mechanisms
- Instrumentation and Communication
- Optical Telescope Assembly
- Science Instruments
- **Pointing Control**
- Thermal Control
- Safing

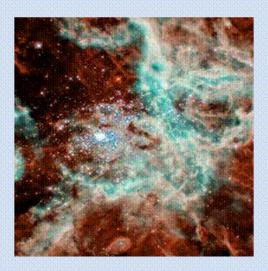

3



Document #: RP-04-12 Version #:

1.0

Page #:

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health

23 of 34



PRELIMINARY OBSERVATIONS

HARDWARE

- Component longevity exceeding specification life is a combination of:
 - Conservative reliability analysis assuming highly stressed components
 - Quality parts screening, fabrication, and test
 - Infant mortality culling
 - Refined operations

HST Architecture:

- Robust with considerable redundancy
- Proven to be adaptable to unforeseen configurations

Components with performance issues:

- Nickel Hydrogen Batteries (service mission baseline augmentation)
- Rate Sensor Unit Gyroscopes (3, 5, and 6 service mission baseline augmentation)
- Fine Guidance Sensors (2R and 3 replacement not identified in baseline service mission
- Pointing/Safemode Electronics Assembly Safing computer (thermal limits under review*)
- Space Telescope Imaging Spectrograph (Side 2 operations under review)

* indicates additional NESC assessment team activities 4



Document #:

Version #:

RP-04-12

1.0

Page #: 24 of 34

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment - Analysis of HST Health





PRELIMINARY OBSERVATIONS (continued)

HARDWARE (continued)

- Crosscutting aspects with potential concerns:
 - Electronics (radiation damage under review)
 - Thermal environment (operational limitations pre and post service mission - under review)
 - Failure Modes and Effects Analysis (review of single point failures - under review)
 - B side electronics switching (assumed reliability)
 - Multi-layer Insulation (increased degradation during solar minimum and contamination potential during servicing)
 - Number of components with service exposure greater than design life (reliance on telemetry for health assessment)



5



Document #:

Version #:

RP-04-12

1.0

Title

Page #:


Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health 25 of 34



PRELIMINARY OBSERVATIONS (continued)

OPERATING CULTURE

- Demonstrated ability to react to and plan for adverse conditions
 - Innovation in the application of HST systems in non traditional roles
 - Mode of recognize, characterize, and strategize
 - Ground-based Life Extension Initiative
- Practice iterative Service Mission versus End of Life Paradigm
 - Data trending directed towards near term problem characterization
 - Risk mitigation activities versus end of life prediction
 - Represents a culture change for the HST Program Team
- Personnel
 - Highly motivated and resourceful team with extensive corporate knowledge
 - Operations rooted in established procedures

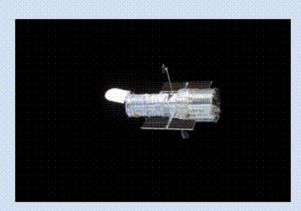

б



Document #:

RP-04-12

Version #: **1.0**

T:41.

Page #:

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health 26 of 34



PRELIMINARY OBSERVATIONS (continued)

RELIABILITY ASSESSMENT

- Updated Aerospace Corporation analysis adheres to MIL-HNBK-217 methodology
- · Shape parameter values (under review)
- MIL-HNBK-217 analyses are intended to be a design trade tool and not an absolute source for field (in-service) failure predictions



7



Document #: **RP-04-12** Version #:

1.0

27 of 34

Page #:

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health



ADDITIONAL ACTIVITIES

- Receive additional reports, procedures, and data requests
- Complete document and analysis review
- Complete interviews
- Finalize observations, findings, and recommendations
- Submit final report

8



Document #: **RP-04-12** Version #: **1.0**

Titlo.

Page #: 28 of 34

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health



BACKUP INFORMATION



9



Document #:

12 1.0

RP-04-12

D //

Version #:

Title

Page #: 29 of 34

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health



REVIEW TEAM

Name Emphasis Area
Steve Gentz NESC Lead

John Azzolini Systems Engineering

Neil Dennehy Guidance Navigation and Control

Pete Spidaliere Systems Engineering Frank Kirchman Scientific Payloads Joe Pellicciotti Mechanical Systems Rodger Farley Mechanical Systems John Stadler Systems Engineering Bob Hodson Power & Avionics John Pandolf Power & Avionics Brent Heard S&MA - Reliability Duane Pettit S&MA - Reliability Lisa McAlhaney Resources Management Natasha Herman Administrative Support



10



Document #: RP-04-12 Version #:

1.0

Page #:

Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health

30 of 34



DOCUMENTATION LISTING

HST Program Reports and Briefings

- Mission Operations, Systems Engineering, and Software Program Observatory Performance Assessment Quarterly Reports
- 15 July 2004 Mission Operations, Systems Engineering, and Software Program Quarterly Briefing
- 22 June 2004 HST Survivability; Comparison of Servicing Tasks
- 10 June 2004 Known Data Discrepancy List
- 2 &3 June 2004 Status of Hubble Spacecraft
- 2 June 2004 Hubble Science Operations
- 13 & 14 May 2004 HST Robotic Servicing Concept Review
- 18 December 2003 Limited Life Items and Risk Mitigation List
- 15 July 2003 Anomaly Reporting for HST Operations and Test
- 13 February 2002 HST Cargo Systems Manual
- 1 April 1997 HST Parts and Control Plan

Aerospace Corporation Reliability Model

- July 2002 HST Reliability Assessment
- August 2003 Adjusted Reliability Model for Science Operations

Independent Program Assessment Office (IPAO) Briefings

- 21 thru 24 June 2004 Briefings
- 20 July 2004 Final Review Briefing

Aerospace Corporation Analysis of Alternatives (AOA) Briefing


- 9 July 2004 Mid Term Briefing
- 3 August 2004 Final Review Briefing

11

	NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #: 1.0
Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health			


APPENDIX F

HST Illustrations

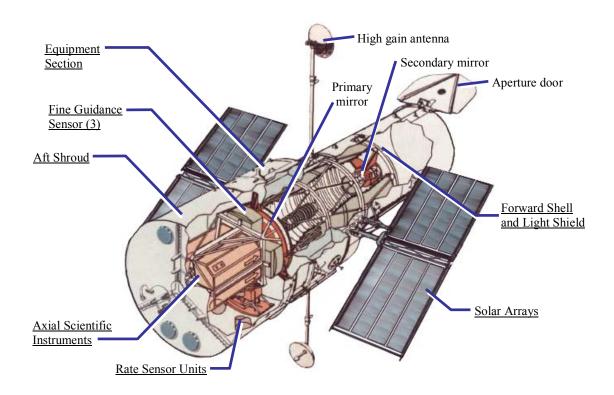


Design Features of Support Systems Module

NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #: 1.0
Title: Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health		Page #: 32 of 34

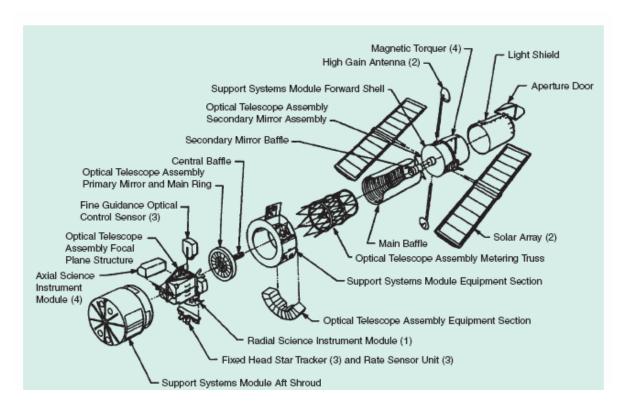

HST - Expanded View

NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #: 1.0
Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health		

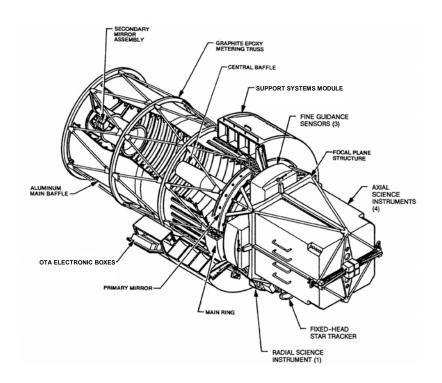

Optical Telescope Assembly Components

NASA Engineering and Safety Center Consultation Position Paper	Document #: RP-04-12	Version #: 1.0
Technical Consultation of the Hubble Space Telescope (HST) System Health Assessment – Analysis of HST Health		

Approval and Document Revision History

Approved:	Original signed on file	9/16/04
	NESC Director	Date

Version	Description of Revision	Office of Primary Responsibility	Effective Date
1.0	Initial Release	Principal Engineers Office	08/24/04

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY)	2. REPORT TYPE		3. DATES COVERED (From - To)
01- 09 - 2005	Technical Memorandum		
4. TITLE AND SUBTITLE		5a. C	ONTRACT NUMBER
Technical Consultation of the Hub	ble Space Telescope (HST) System		
Health Assessment – Analysis of I	IST Health	5b. G	RANT NUMBER
		5c. Pi	ROGRAM ELEMENT NUMBER
6. AUTHOR(S)		5d. Pl	ROJECT NUMBER
Gentz, Steven J.; Heard, Brent N.;	Hodson, Robert F.; Pettit, Duane H.:	,	
Pandolf, John E.; Azzolini, John E Farley, Rodger E.; Kirchman, Fran		5e. T	ASK NUMBER
		5f. W	ORK UNIT NUMBER
		104-0	08-33
7. PERFORMING ORGANIZATION	NAME(S) AND ADDRESS(ES)	-	8. PERFORMING ORGANIZATION REPORT NUMBER
NASA Langley Research Center			NEFORT NOMBER
Hampton, VA 23681-2199			L-19173
			E-17173
9. SPONSORING/MONITORING AG	ENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)
National Aeronautics and Space A Washington, DC 20546-0001	dministration		NASA
washington, DC 20340-0001			11. SPONSOR/MONITOR'S REPORT NUMBER(S)
			NASA/TM-2005-213917
12. DISTRIBUTION/AVAILABILITY S	TATEMENT		

Unclassified - Unlimited Subject Category 16

Availability: NASA CASI (301) 621-0390

13. SUPPLEMENTARY NOTES

An electronic version can be found at http://ntrs.nasa.gov

14. ABSTRACT

The NESC conducted an abridged independent examination of available information and personnel interviews to evaluate the current and anticipated state of the spacecraft subsystems and the parameters that describe the HST's health. These examinations included the projected timeliness of a robotic SM and whether the GSFC baseline concept is likely to provide the capability to extend the useful scientific life of the HST by an additional 5 years. The NESC team collected a broad spectrum of pertinent HST Program analyses, reports, briefings, and the results of the IPAO and the Aerospace Corporation AOA assessments as they relate to the degradation of the HST's health. This review included the state of the HST subsystems having the potential to impact the viability of the HST, but will not be serviced under the baseline robotic SM.

15. SUBJECT TERMS

Battery capacity; GN&C; Health; HST; Life predictions; NESC; Nickel hydrogen batteries; Reliability analysis; Rate sensor unit; Servicing mission

16. SECURITY CLASSIFICATION OF:		17. LIMITATION OF ABSTRACT	18. NUMBER OF	19a. NAME OF RESPONSIBLE PERSON	
a. REPORT	b. ABSTRACT	c. THIS PAGE	ABSTRACT	PAGES	STI Help Desk (email: help@sti.nasa.gov)
					19b. TELEPHONE NUMBER (Include area code)
U	U	U	UU	39	(301) 621-0390